


## CABLE BREAKOUT BOOTS, THREE ENTRY MODIFICATIONS

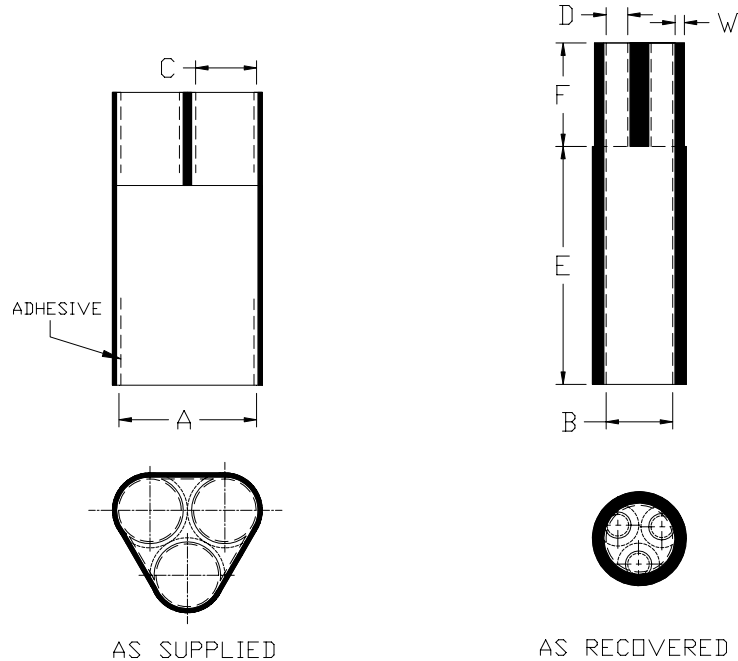

### Table of Dimensions, inch (mm):

PART NUMBER (SEE NOTE*)	BODY ID		LEG ID		LENGTH RECOVERED MIN		REC'D. WALL THICKNESS REF
	EXP. (A), MIN	REC'D. (B), MAX	EXP. (C), MIN	REC'D. (D), MAX	(E), BODY	(F), LEG	
T42-100FR-01	1.70 (43)	0.90 (23)	0.95 (24)	0.30 (8)	2.3 (58)	1.2 (30)	0.12 (3.0)
T42-100FR-02	1.70 (43)	0.90 (23)	0.95 (24)	0.30 (8)	1.2 (30)	1.2 (30)	0.12 (3.0)
T42-100FR-G02	1.70 (43)	0.90 (23)	0.95 (24)	0.30 (8)	1.2 (30)	1.2 (30)	0.12 (3.0)
T42-100FR/ ROUND-BASE	2.10 (53)	0.90 (23)	0.82 (21)	0.30 (8)	2.3 (58)	1.2 (30)	0.12 (3.0)

**Note\*:** Add "NA" to the end of Part Number if no adhesive is required

**Material:** Heat shrinkable boot material in accordance with -3 polyolefin

**Factory applied sealant:** Factory applied hot melt adhesive is standard.

### CUSTOMER DRAWING

		<b>Raychem Molded Parts</b> 305 Constitution Drive, Menlo Park, CA 94025		TITLE:			
				<b>CABLE BREAKOUT BOOT, THREE ENTRY MODIFICATIONS</b>			
Unless otherwise specified dimensions are in inches. [Metric dimensions are shown in brackets]			DOCUMENT NO.:				
			<b>TXXX-XXXFR-XX</b>				
Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.			REV:				
			D				
REVISED BY:		CAGE CODE:	Org. Date:	FILE :	SIZE	DATE:	
U. Nguyen		06090	5/7/07	TXXX-XXXFR-XX.doc	A	October 6, 2008	
					SHEET:	1 of 1	