



Assembly Instructions

1) Strip the cable to the dimensions shown. Take care not to nick the centre conductor or braid. Remove all exposed foil and fold back braid over outer jacket.

A = 9mm
B = 4mm
C = 8mm

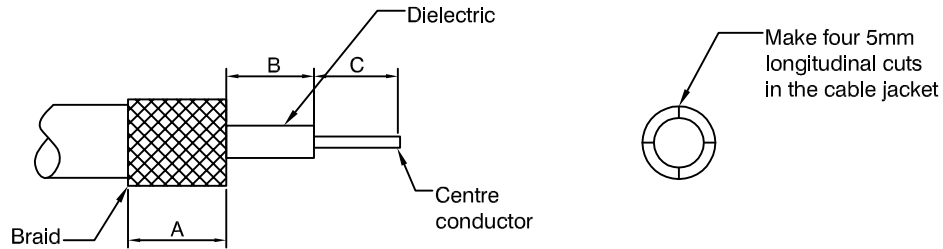


2) Insert the cable into the body. Ensure the centre conductor penetrates the aperture at the front of the connector. The dielectric must be flush with the aperture while the braid and jacket are positioned between the inner and outer rings.

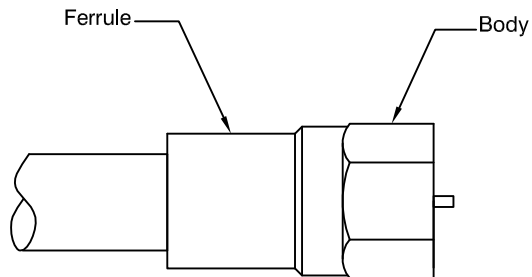

Connector Part Number	Stripping Tool Part Number	Crimp Tool Part Number	Hex Size	
			Contact	Ferrule
VF10-125	N/A	CTM3500	N/A	8.20

3) Crimp the ferrule using the correct tool for the connector.

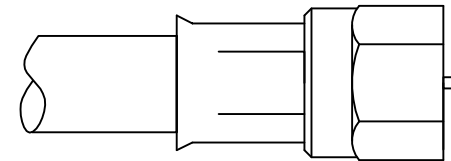

CAD Issue	SN	2	30 Aug 01
First Issue	IS	1	01 July 98
DESCRIPTION OF REVISION	APPVD	ISS	DATE



EMERSON
Network Power

Connectivity Solutions
7-13 Russel Way,
Widford Industrial Estate,
Chelmsford, Essex,
CM1 3AA, UK.
Tel: +44 (0) 1245 359515
Fax: +44 (0) 1245 358938

SCALE: Not To Scale

DIMENSIONS: mm

TOLERANCES:

DRAWN BY:

S Nash

CHECKED BY:

M Nielsen

APPROVED BY:

R Drennan

DATE:

30 Aug 01

DESCRIPTION:

Stripping and assembly
instructions for F crimp plug

DRAWING NUMBER:

VAIF1108

PAGE: 1 OF 1