PDUMNV30

Monitored Rackmount PDU















Low Voltage Input/Output

24 Outlets

30A Max Capacity

Multimode **Load Meter**

Network Interface

B (BANK 2)

Toolless

- A Digital Load Meter
- B 5-15/20R Outlets
- **C** 20A Circuit Breakers
- Removable Cord **Retention Brackets**
- **E** Removable Mounting **Brackets**
- F Toolless Mounting **Buttons with Removable** 90° Rotation Brackets
- **G** 10 ft. Input Power Cord
- H L5-30P Twist-Lock Input Plug
- Durable Metal Case
- Network Interface
- K RJ45 Ethernet Jack
- Manual Configuration Port
- Environmental **Monitoring Port**
- Network Interface **Reset Button**





AC Input Connection: Insert L5-30P twist-lock plug into compatible L5-30R utility, generator or UPS outlet.

(BANK 1 & BANK 2)

Also Includes: Cable Ties, Owner's Manual, PowerAlert Software CD-ROM








0U Rackmount





Multimode Load Meter: Press the "Select" button to switch modes—display the load for bank 1, bank 2 or both banks combined.



Note: Installed 17.67 mm toolless mounting buttons can be replaced with included 14 17 mm buttons for additional compatibility.




Model	PDUMNV30
Voltage	100-127V
Frequency	50/60Hz
Maximum Capacity	30A
Agency-Derated Capacity	24A
Input Connector	L5-30P
Cord Length	10 ft.
Outlets	24 (5-15/20R)
Primary Mounting Option	0U (Vertical) Rackmount
Unit Weight & Dimensions	11.5 lb / 4.25 x 70 x 2.25 in.
	See next page for detailed unit measurements.
Certifications	Tested to UL 60950-1 (US & Canada), NOM (Mexico),
	FCC Class A
Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.	

- Distributes power to 24 outlets arranged in two banks
- Remote monitoring via SNMP, Web or Telnet
- Displays load for either outlet bank or both banks combined in real time
- · Perfect for rackmount server, network and telecom applications

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS



1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com

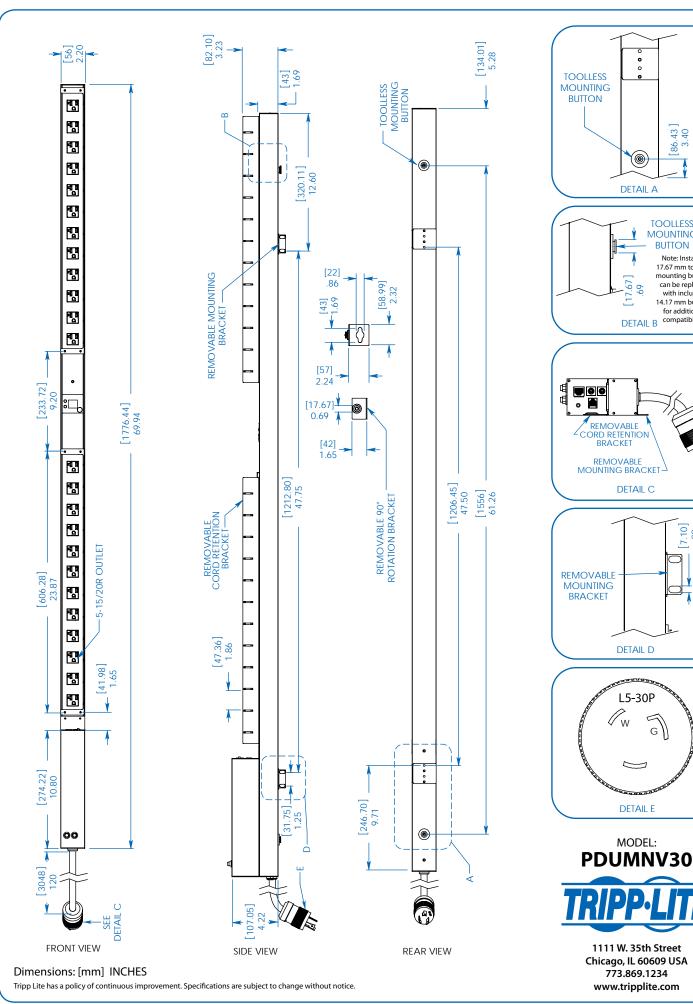

86.43] 3.40

TOOLLESS MOUNTING

BUTTON

for additional compatibility.

Note: Installed 17.67 mm toolless mounting buttons can be replaced with included 14.17 mm buttons

[7.10] .28

DETAIL E

(<u>@</u>)

DETAIL A

[17.67]