


Notes:

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Part No. & WK/YR Date Code, Black Text.
3. 100% Sweep Test to Max Freq. w. factory stored Hi-Point data.
4. No Marker ≤ 4 " Length

ConductRF(Wk/Yr)
FMA28-PFPF-XXX

Marker Example

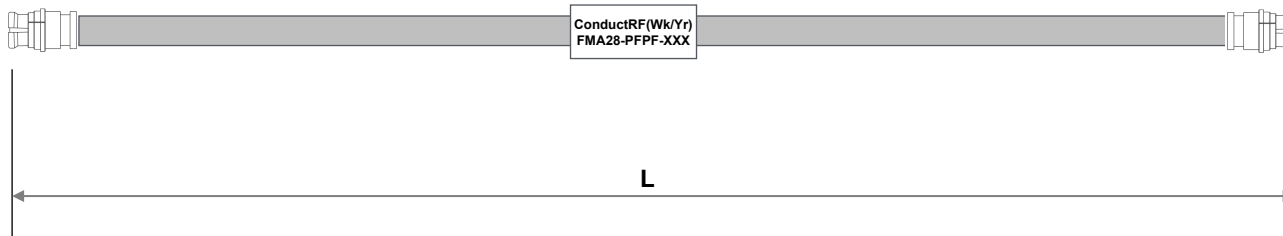

Length	XXX	Insertion Loss(dB) Typ.		
		6GHz	12GHz	18GHz
3"	S03	0.35	0.50	0.61
6"	S06	0.51	0.74	0.92
8"	S08	0.62	0.90	1.12
12"	S12	0.84	1.22	1.52
16"	S16	1.06	1.54	1.92
18"	S18	1.17	1.70	2.13
24"	S24	1.50	2.18	2.73
VSWR(Max)		1.50:1		


Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)
 SXX = Length in Inches (eg S18=18")
 XMX = Length in Meters (eg 2M5=2.5m)
 CXX = Length in CM (eg C50=50cm)

4	Shrink Tube	Marker	White
3	Hand Form .086"	A28CF	Tinned
2	SMP Female	PPF12C-A28G01	Gold
1	SMP Female	PPF12C-A28G01	Gold
ITEM	DESCRIPTION	MATERIALS	FINISH

REV.	DESCRIPTION	ECN	DRAWN	DATE
4	Updated BOM		DG	10/13/20
3	Updated to 18GHz Standard		DG	10/08/20
2	Updated Cable to A28MC for Inc. Frequency		DG	09/23/20
1	Pre-Release		DG	01/27/14

REVISION HISTORY

Customer DWG		Title: Hand Form 0.086" SMP Female to SMP Female			
Remarks: 035/035/5	Originated: 01/27/14	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Range: FMA	Sheet 1 of 1	
	Dwg Ref: FMA28-PFPF				
Tolerances: Length +/-5%	Checked: JW	Approved: PL	Rev: 4	Part No: FMA28-PFPF-XXX	