


NOTES 1 LEAD CO-PLANARITY INCLUDE REINFORCED METAL FITTINGS SHALL BE 0.1 mm MAX.
 2 WHEN A PART MARKED WITH HAS A PATTERN BUT NO RESIST ON IT. TAKE CARE TO PREVENT THE CONNECTOR FROM TOUCHING IT.


MATED HIGHT (h)	RECEPTACLE NO. (mm)	
HEADER NO.	DF17#(3.0)-80DS-0.5V(57)	DF17#(4.0)-80DS-0.5V(57)
DF17A(4.0)-80DP-0.5V(57)	7	8

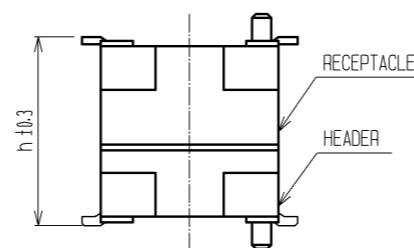

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
1	PHOSPHOR BRONZE	CONTACT AREA:GOLD PLATED 0.1µm min LEAD AREA:TIN PLATED 1µm min UNDER PLATING:NICKEL PLATED 1µm min	5	PS	PLASTIC REEL . BLACK
			4	POLYESTER	CLEAR (COVER TAPE)
			3	A-PET	CLEAR (EMBOSSD CARRIER TAPE)
			2	POLYAMIDE (PA6T)	NATURAL (BEIGE) . UL94V-0

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	△	APPROVED : KH. IKEDA 08.09.25			
			CHECED : TS. MIYAZAKI 08.09.25			
			DESIGNED : TY. YAMASAKI 08.09.03			
			DRAWN : TY. YAMASAKI 08.09.03			

DRAWING NO.	PART NO.	CODE NO.
EDC3-161772-02	DF17A(4.0)-80DP-0.5V(57)	CL683-0138-4-57

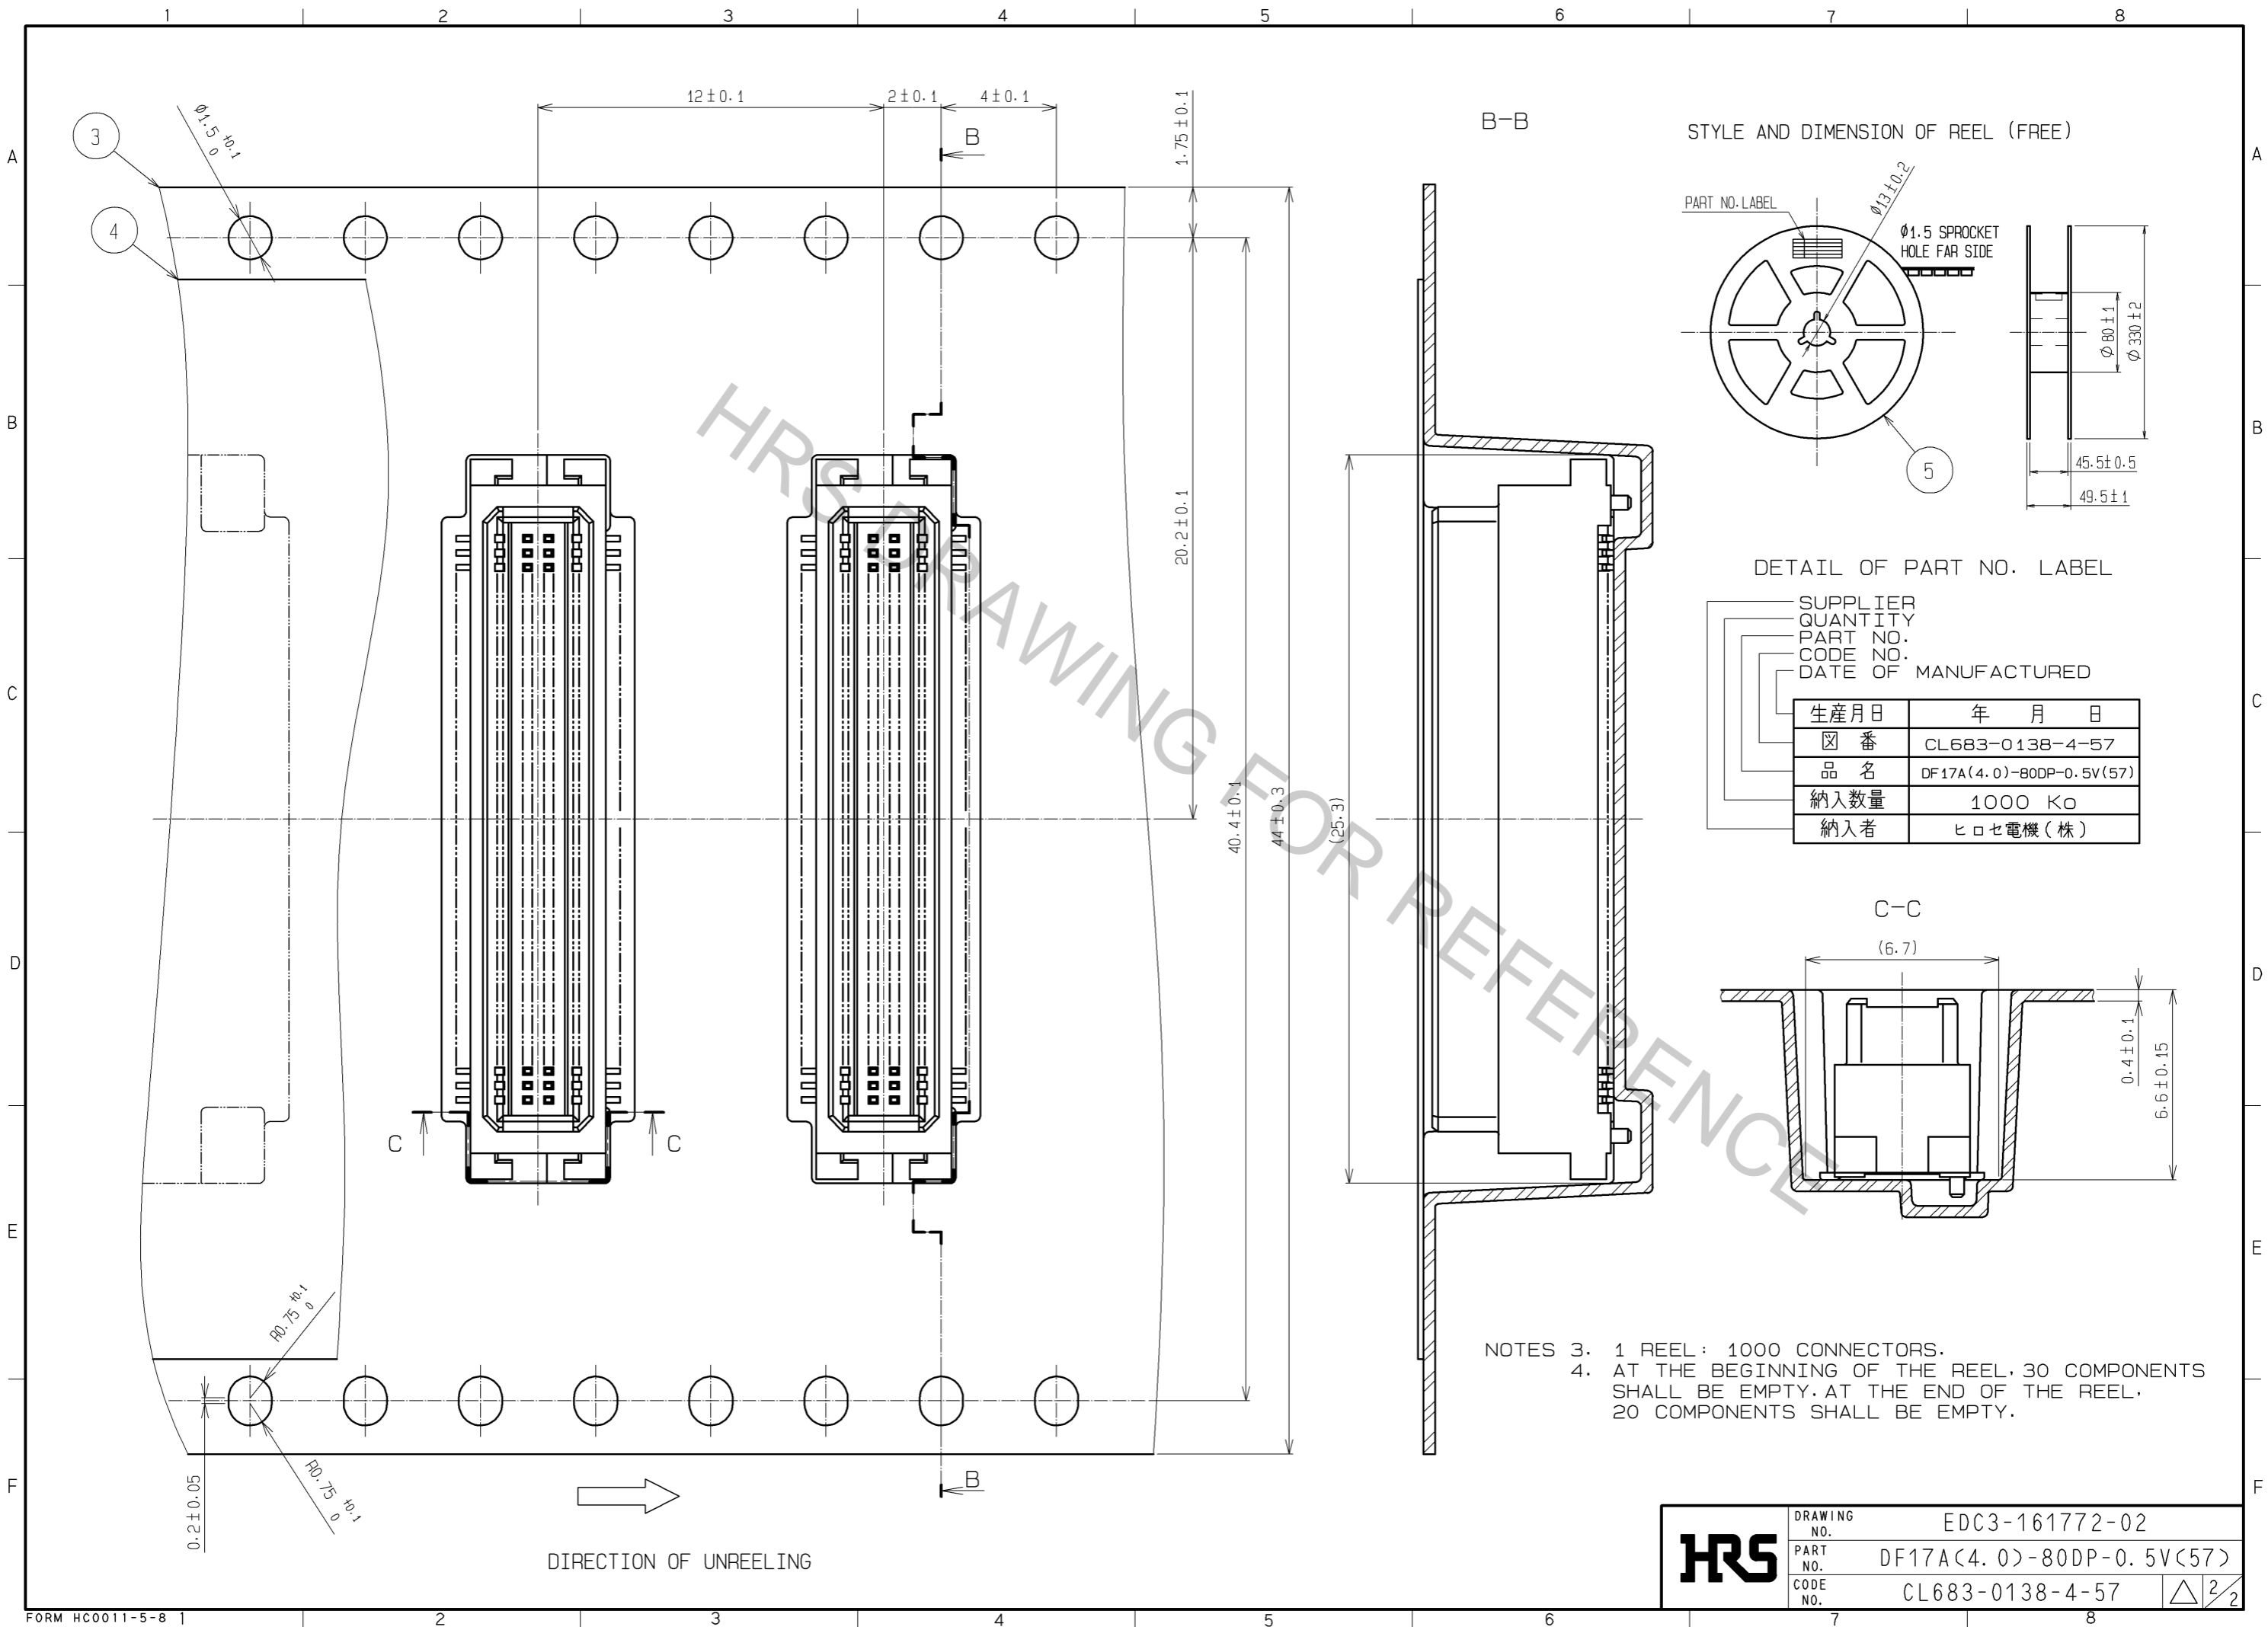

NOTES 3. 1 REEL : 1000 CONNECTORS.
 4. AT THE BEGINNING OF THE REEL, 30 COMPONENTS SHALL BE EMPTY. AT THE END OF THE REEL, 20 COMPONENTS SHALL BE EMPTY.

HRS	DRAWING NO.	EDC3-161772-02
	PART NO.	DF17A(4.0)-80DP-0.5V(57)
	CODE NO.	CL683-0138-4-57
		\triangle 2/2