



COUNT DESCRIPTION OF REVISIONS		BY CHKD		DATE		COUNT DESCRIPTION OF REVISIONS		BY CHKD		DATE	

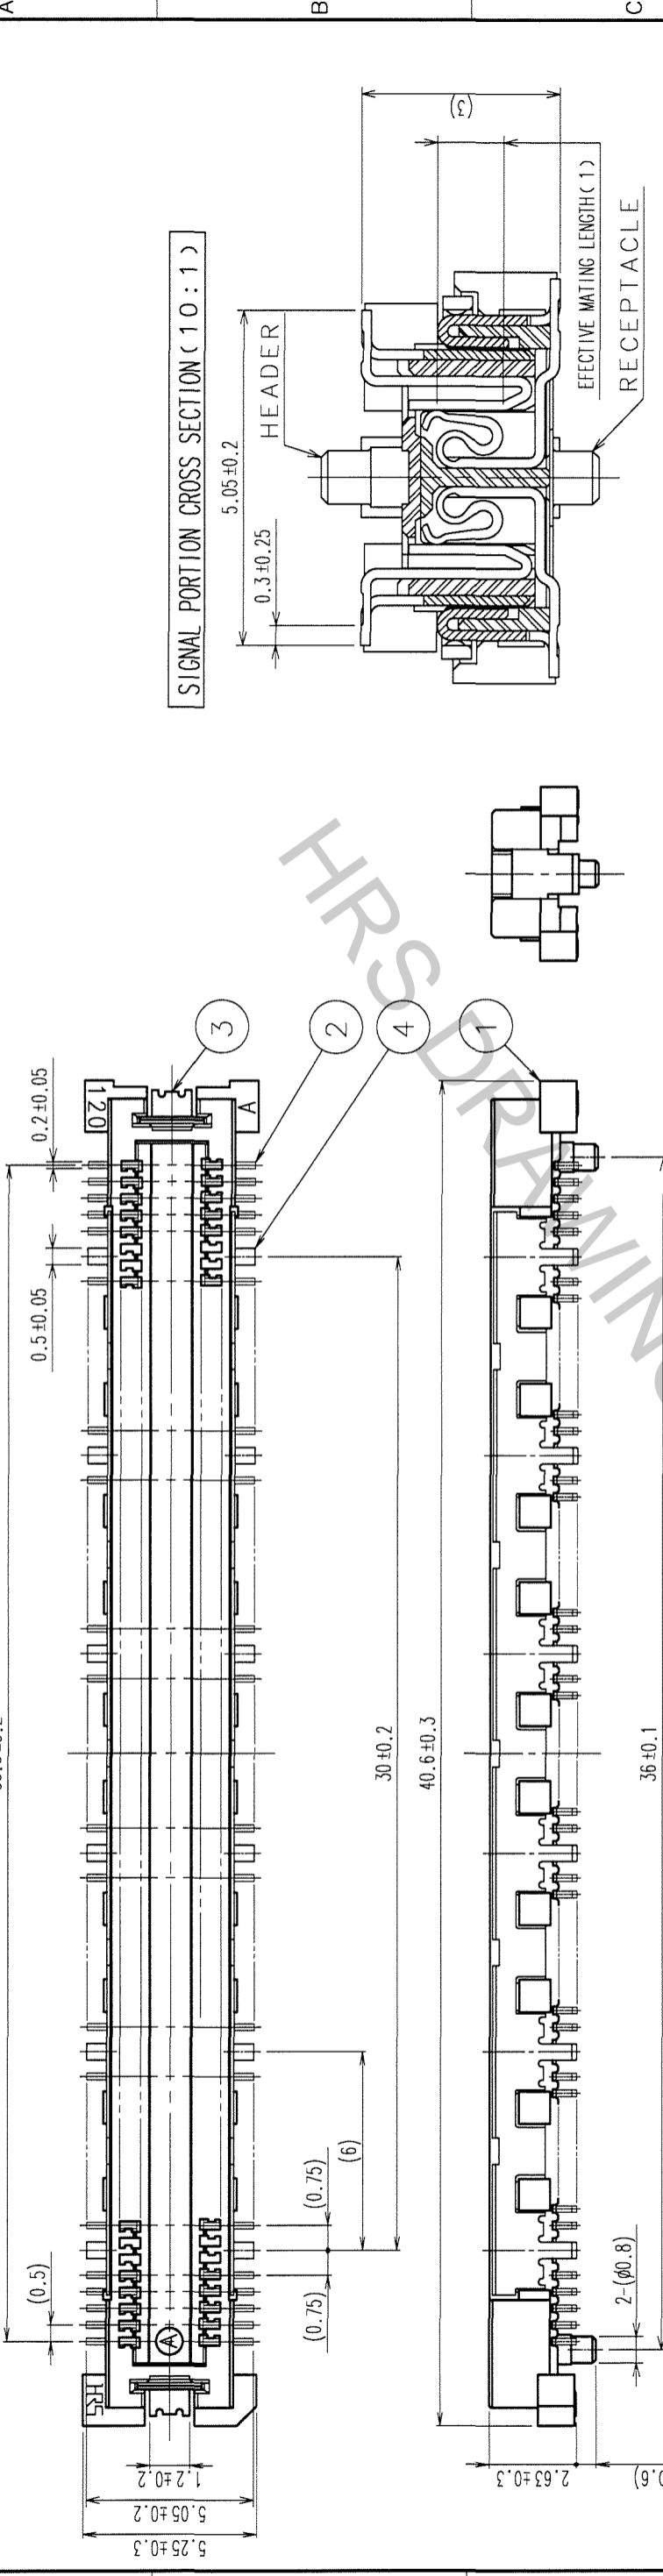

RECOMMENDED LAND PATTERN DIMENSION OF PCB

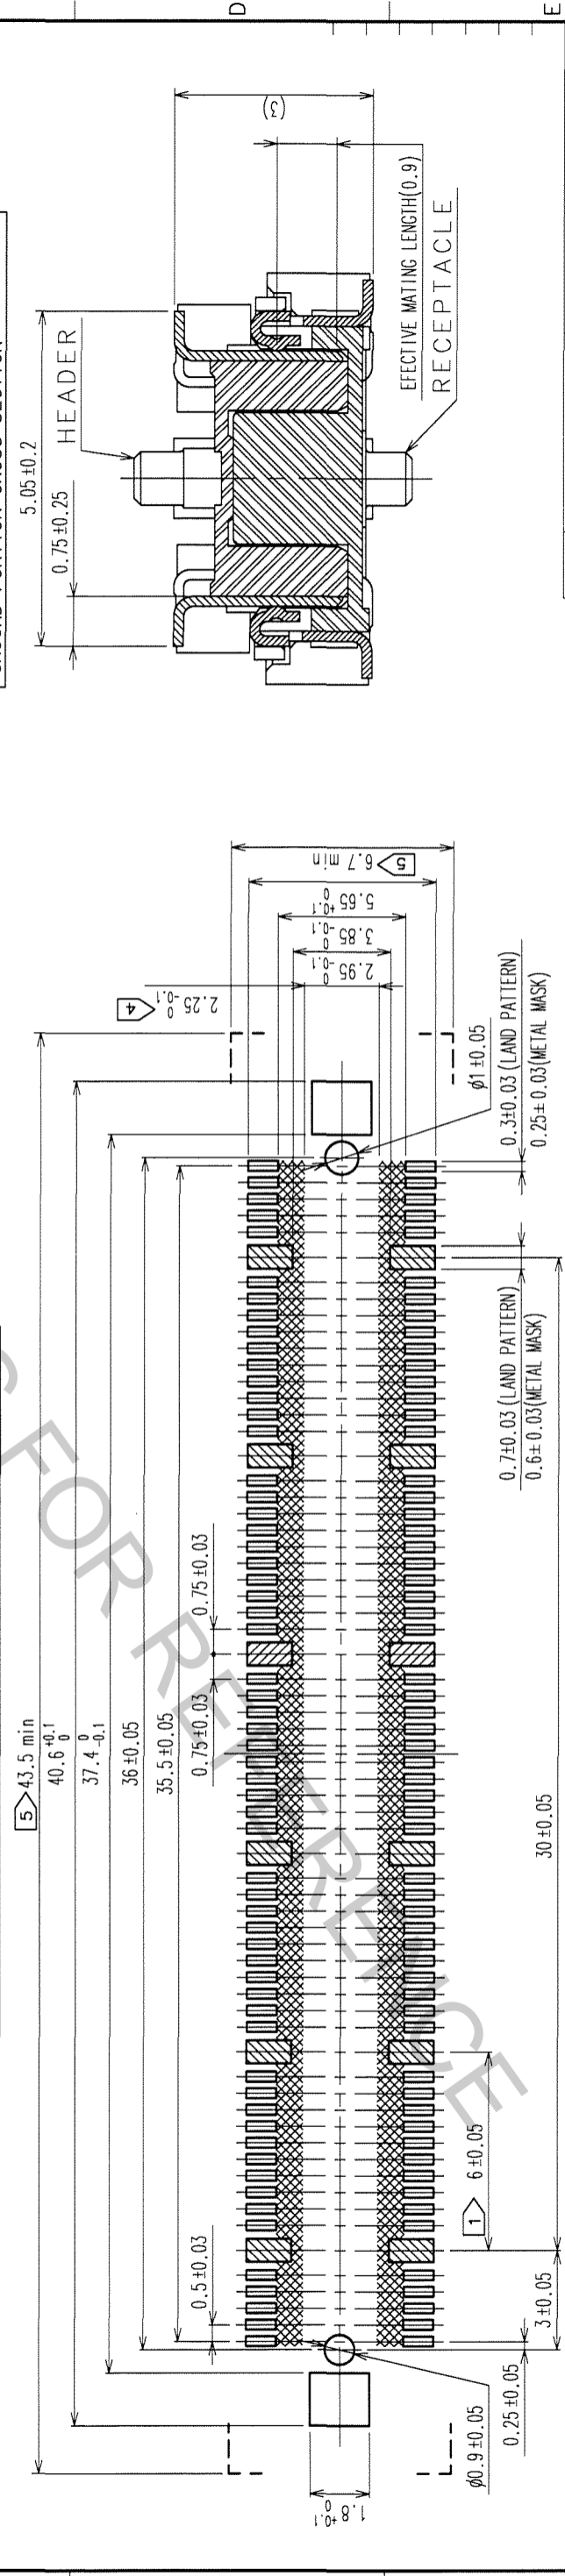

- NOTES
- 12 HATCHED PARTS: GROUND CIRCUIT.
 - SMT LEAD-COPLANARITY: 0.1 MAX.
 - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - DO NOT MOUNT OTHER DEVICES ONTO [] AREA, OR MATING PAIR CANNOT BE MATED.
 - THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

3, 4 PHOSPHOR BRONZE		TIN-PLATING		COPPER ALLOY		CONTACT AREA: GOLD 0.1 μm min.	
1	LCP	BEIGE	UL94V-0	2	COPPER ALLOY	LEAD AREA: GOLD FLASH	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS	UNDER PLATING: NICKEL 1 μm min.	
CL							
DRAWN		DESIGNED		CHECKED		APPROVED	
K. NAKAMURA		K. NAKAMURA		X. Oyamane		H. Okuma	
06.02.20		06.02.20		06.02.20		06.02.20	
DRAWING NO.		PART NO.		CODE NO.		RELEASED	
EDC3-152617-25		FX11A-120P/12-SVO.5(71)		CL573-0605-2-71		1	
SCALE		UNITS		mm			
5 : 1		mm					