

1

2

3

4

A

B

C




D

A


B

C

D

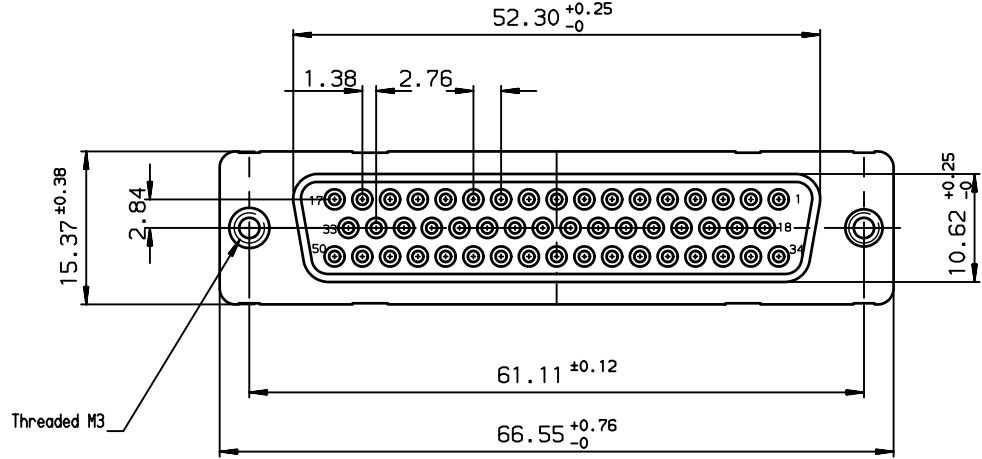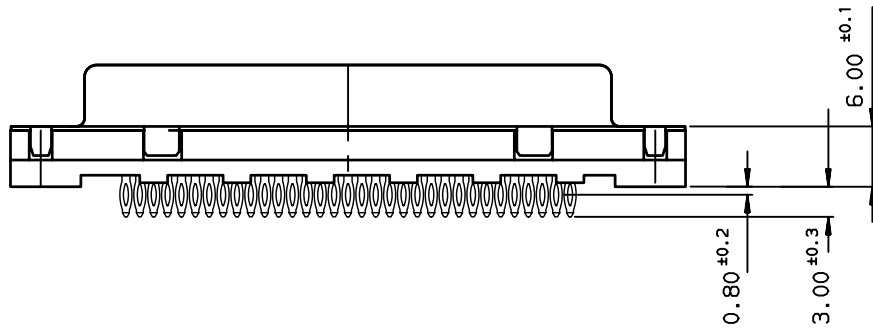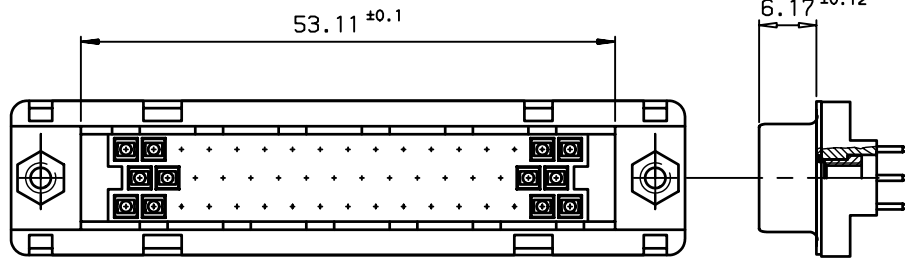

PC board drilling dimensions
(after plating - thickness: 1.60 to 3.20 mm)

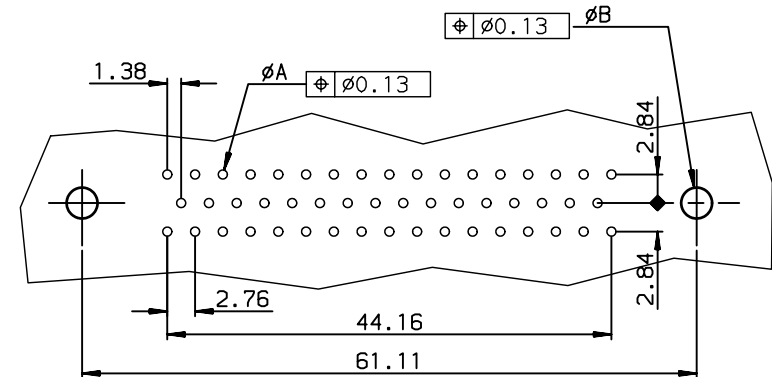

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

TIN LEAD PART NUMBER

PART NUMBER	
flash gold	D50S91C4PL00
0.76µ gold	D50S91C6PL00

LEAD FREE PART NUMBER

PART NUMBER	
flash gold	D50S91C4PL00LF
0.76µ gold	D50S91C6PL00LF

rev	ecn no	dr	date
A	-	JOU	1996/08/12
B	LS05-004	MPE	2005/02/11
D	-	MPE	2005/11/28
E	LS06-0097	LGO	2006/07/29
F	LS06-0140	LGO	2006/09/25
-	-	-	-
-	-	-	-

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm
TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	JOUBERT	1996/08/12	ANGULAR	0.X ±0.1
Eng	PESSON	1996/08/12	LINEAR	0.XX ±0.1
Chr	LEGARE	1996/08/12	0.XX' ±2'	0.XXX ±0.1
Appr	LEGARE	1996/08/12	Product family	D-SUB
spec ref				LS06-0097
title			F	
FEMALE CONNECTOR DELTA D			dwg no	
STRAIGHT PRESS-FIT.			C01-8646-0272	
catalog no			CUSTOMER sheet 1 of 1	

European Views

Scale 2

1

2

3

4