

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0787570001](#)  
**Status:** **Active**  
**Overview:** Serial Attached SCSI (SAS) Connectors  
**Description:** 1.27mm Signal Pitch, 0.80mm Signal Pitch, 1.27mm Power Pitch U.2 (SFF-8639) Receptacle, Vertical, Surface Mount, with Front Solder Tab, 8.15mm Height, 2.00mm Peg Length, 2.36mm Peg Diameter, 1.60mm PCB Thickness, 68 Circuits, with Cap, Embossed Tape and Reel, Lead-Free

**Documents:**

<a href="#">3D Model</a>	<a href="#">Application Specification AS-78757-001-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Packaging Specification PK-78757-001-001 (PDF)</a>
<a href="#">Product Specification PS-78757-001-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Product Specification TS-78757-001-001 (PDF)</a>	

**Agency Certification**


CSA	LR19980
UL	E29179

**General**

Product Family	I/O Connectors
Series	<a href="#">78757</a>
Application	Board-to-Board
Comments	With Cap
Component Type	Receptacle
Electrical Model	Yes
Overview	<a href="#">Serial Attached SCSI (SAS) Connectors</a>
Product Name	U.2 (SFF-8639)
Type	N/A
UPC	887191240602

**Physical**

Circuits (Loaded)	68
Circuits Detail	Signal 53, Power 15
Color - Resin	Black
Durability (mating cycles max)	500
Flammability	94V-0
Gender	Female
Keying to Mating Part	Yes
Lock to Mating Part	None
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Liquid Crystal Polymer
Net Weight	1.887/g
Number of Rows	2
Orientation	Vertical
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Embossed Tape on Reel
Panel Mount	No
Pitch - Mating Interface	0.80mm, 1.27mm
Pitch - Termination Interface	0.80mm, 1.27mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes

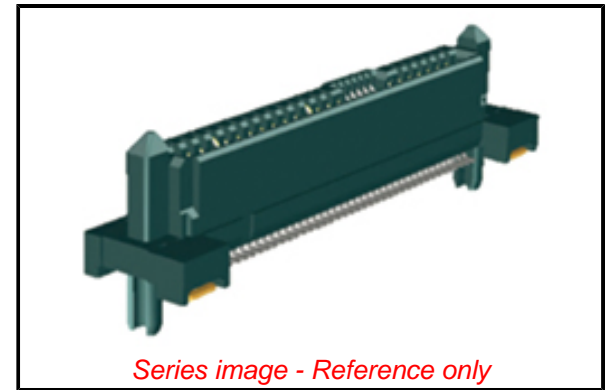

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per  
-ED/01/2017 (12  
January 2017)

**Halogen-Free**

**Status**

**Low-Halogen**

**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[78757](#) Series

**Mates With**

U.2 (SFF-8639) Plug [78758](#) , SAS / SATA Plugs

Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	0°C to +55°C
Termination Interface: Style	Surface Mount
Waterproof / Dustproof	No

**Electrical**

Current - Maximum per Contact	1.5A
Voltage - Maximum	30V

**Solder Process Data**

Duration at Max. Process Temperature (seconds)	010
Lead-free Process Capability	REFLOW
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260

**Material Info****Reference - Drawing Numbers**

Application Specification	AS-78757-001-001
Electrical Model Document	EE-78757-001, EE-78757-002
Packaging Specification	PK-78757-001-001
Product Specification	PS-78757-001-001, TS-78757-001-001
S-Parameter Model	SP-78757-001, SP-78757-002
Sales Drawing	SD-78757-001-001
Signal Integrity Report	SI-78757-001

This document was generated on 03/03/2017

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**