



Since 1959


Product Information Sheet

HS1 12V 35/35W

HS1 35/35W

2017. 09. 20 NEW

2013. 10. 11 OLD

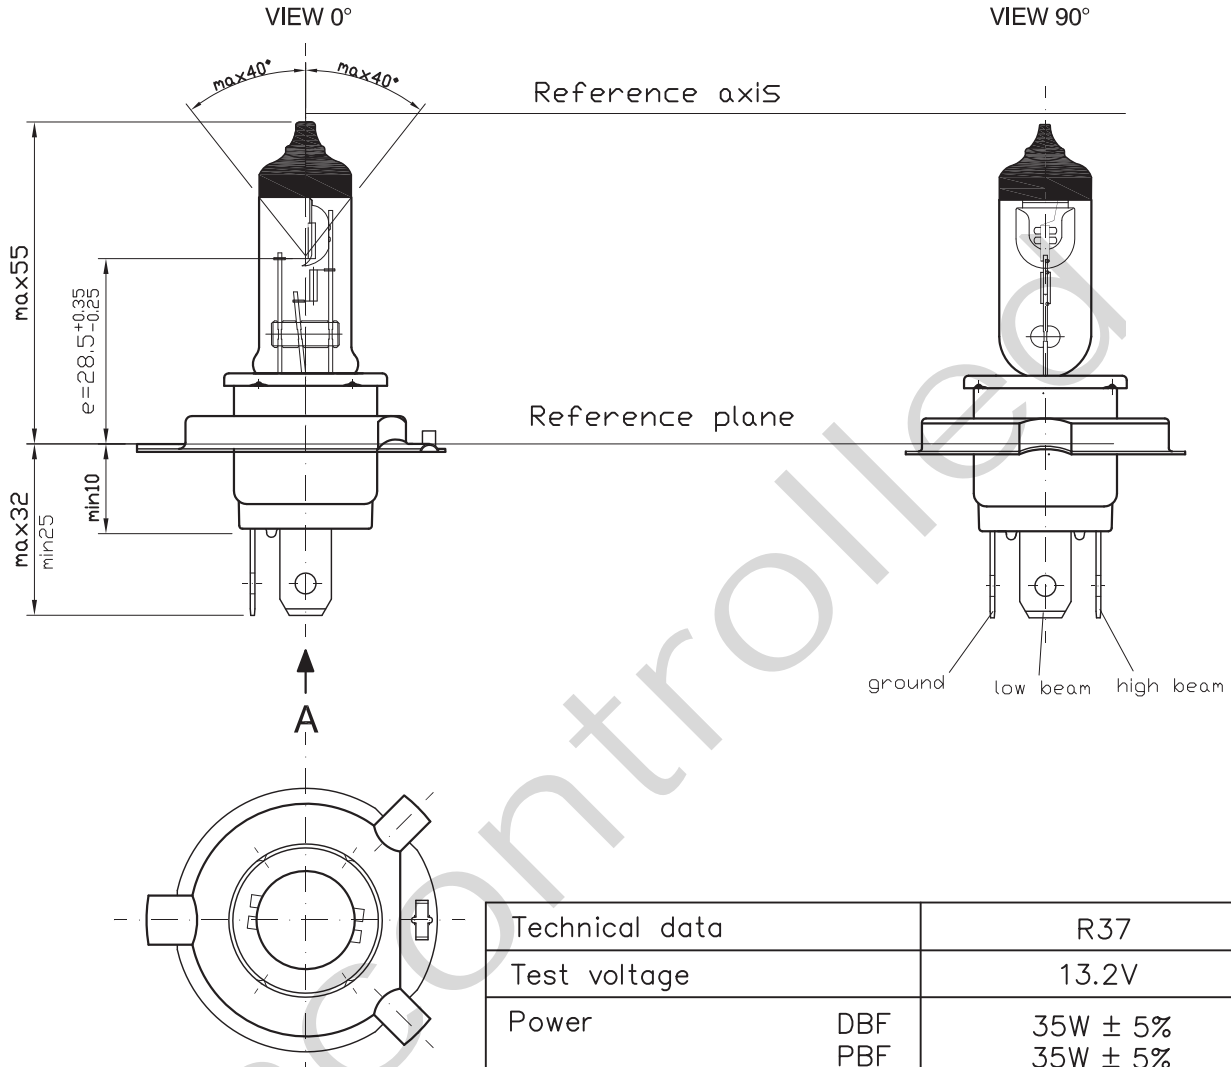

Halogen bulb
 HS1 12V 35/35W
 Cap: ¹⁾ PX43t
 Type: STD
 ECE R37 (E1) 2A54
 FMVSS108 None
 Bulb mat,: Quartz glass
 Made in china / JDH

Technical data		R37
Test voltage		13.2V
Power	DBF	35W ± 5%
	PBF	35W ± 5%
Luminous flux	DBF	825lm ±15%
	PBF	525lm ±15%
Lumen maintenance after 150hr	DBF	85 % min
	PBF	85 % min
Rated life:	^{4) 7)} at 13.2V Tc: 400 hr B50: 350 hr B3: 150 hr	
Maximum operating temperature:	1: bulb 650°C max 2: pinch 400°C max	
Vibration resistance acc. to IEC 60810 Annex B; table B.2	> 20h	

1) According to IEC 60061-1 sheet 7004-34-2
 2) According to SAE J 1383 Annex 5.20
 3) Switching cycle according to SAE J 1383 5.20.2
 4) According to IEC 60810 Annex A
 5) Switching cycle according to IEC 60810 Annex A;4.1.1
 6) Switching cycle according to IEC 60810 Annex A;4.1.2
 7) Switching cycle according to IEC 60810 Annex A;4.2