

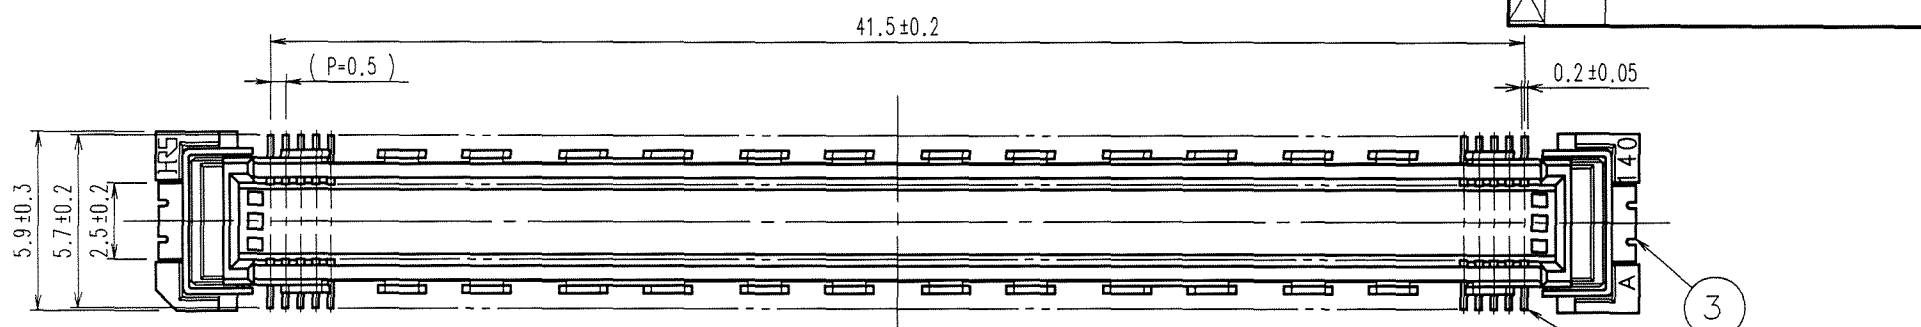


Apr.1.2017 Copyright 2017 HIROSE ELECTRIC CO., LTD. All Rights Reserved.


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

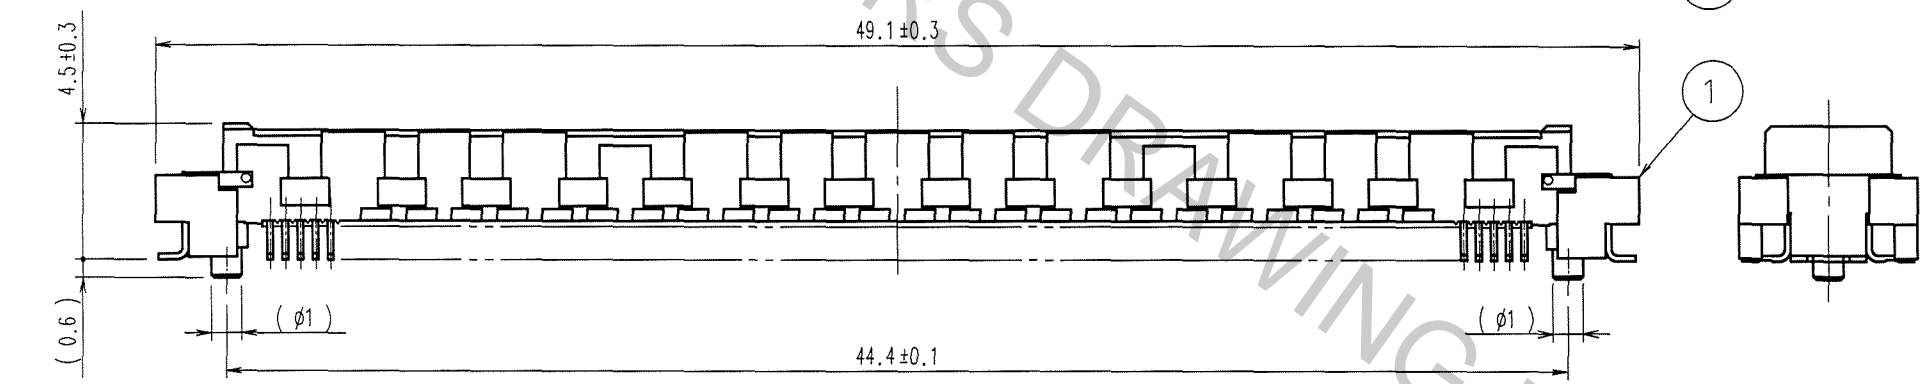

CROSS-CUT SECTION (10:1)

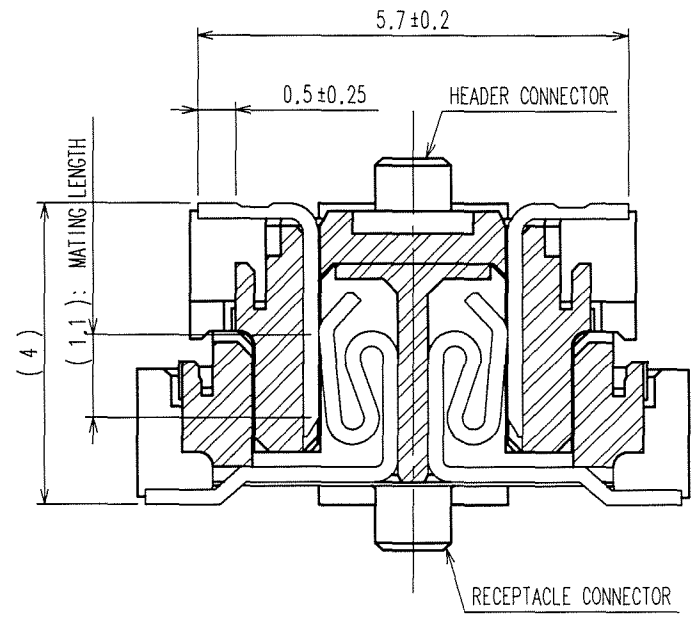

RECOMMENDED LAND PATTERN

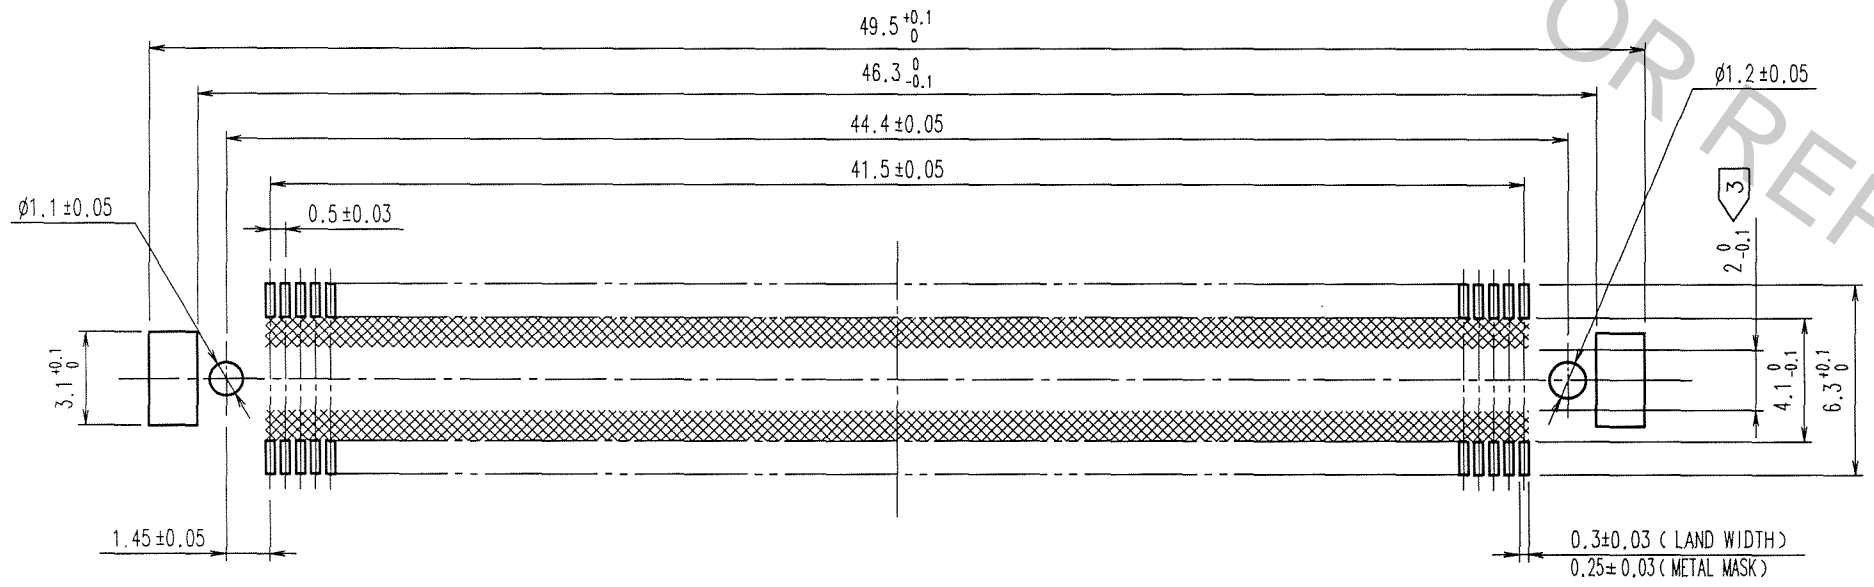

3	PHOSPHOR BRONZE	TIN-PLATING
2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1μm min. LEAD AREA : TIN-PLATING 1μm min. UNDER PLATING : NICKEL 1μm min.

1	LCP	BEIGE	UL94V-0		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL	DRAWN K.DOI 06.04.17	DESIGNED <i>H. Doi</i> '06.04.17	CHECKED <i>K. Ozawa</i> '06.04.18	APPROVED <i>H. Okawa</i> '06.04.18	RELEASED
----------------------	----------------------------	--	---	--	----------

NOTES

- SMT LEAD-COPLANARITY: 0.1 MAX.
- THIS PRODUCT HAS NO POLARITY TO MOUNT ON THE RECOMMENDED LAND PATTERN.
- NO PATTERN SHALL BE DESIGNED IN THIS AREA , TO PREVENT CONTACTS FROM BEING TOUCHED WITH PATTERN.
- THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

SCALE 4 : 1	DRAWING NO. EDC3-151971-25	PART NO. FX10A-168P-SV1(71)
UNITS mm	HRS HIROSE ELECTRIC CO., LTD	CODE NO. CL570-0144-2-71

TO
PCK

1/1