
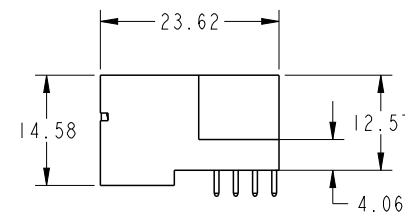


PRODUCT NO.	ROWS	POWER				SIGNAL					POWER		SIG		POW			
		E1	P1	P2	P3	P4	1	2	3	4	5	6	P5	P6	7	8	P7	E2
51939-847-- NOTE 3	DCBA																	

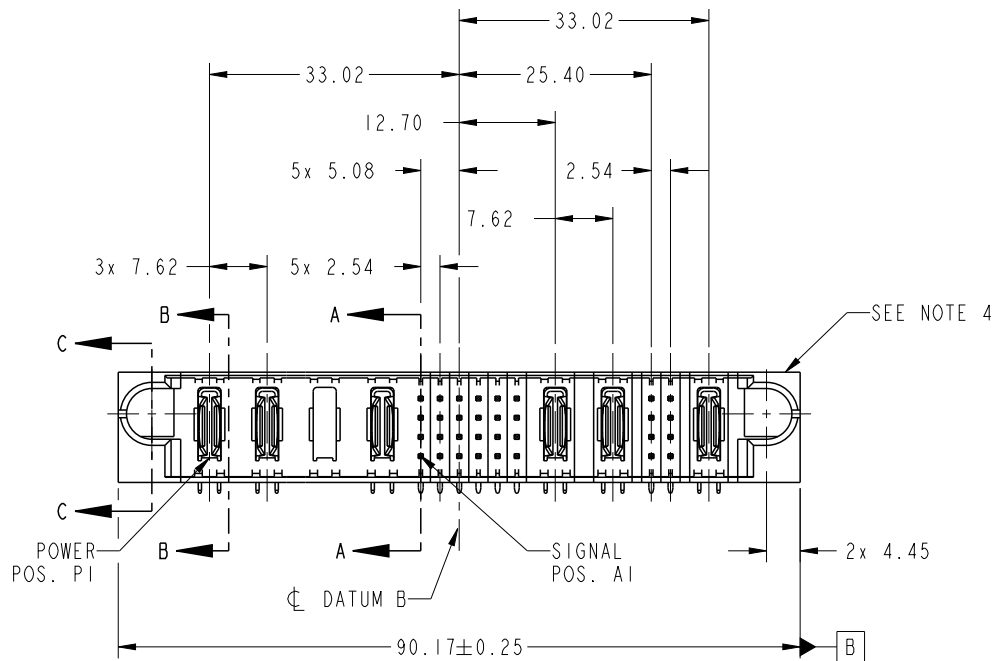


CODE	DIM "M" MATING LENGTH	CONTACT TYPE
U	[6.86]	SIGNAL
T	[6.86]	SIGNAL
S	[6.86]	SIGNAL
R	[6.86]	SIGNAL
PA	[N/A]	POWER
X	OMITTED	OMITTED


spec ref	*	dr	Ruan MT	2014/03/21	projection 	MM ←→	size	A4	scale	1:1			
tolerance std	ASME Y14.5	eng	De-Ming Lu	2014/04/02			ecn no	-					
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	-	-			rel level	Released					
surface	✓	appr	Pei-Ming Zheng	2014/04/02	product family	PwrBlade	linear	0.X	±0.5	 www.fci.com	title 4ACP+24S+2ACP+8S+1P RIGHT ANGLE SOLDER HEADER cat. no. -	dwg no 51939-847	rev A
ASME Y14.5	angular	0°	±2°	Product - Customer Drw	sheet 1 of 4								

PRODUCT NUMBER


51939-847--
NOTE: 3

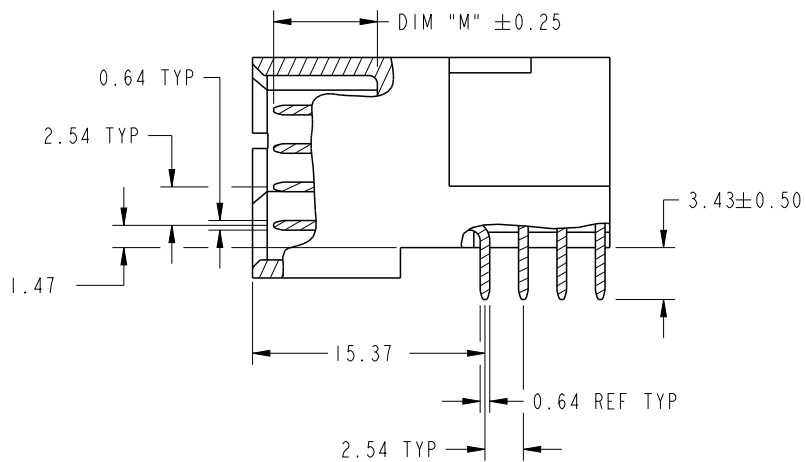


BROKEN-OUT SECTION A-A
SCALE 2:1

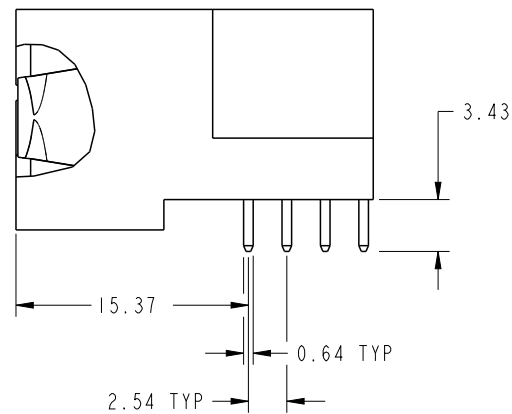

BROKEN-OUT SECTION B-B
SCALE 2:1



SECTION C-C



PARTIAL SECTION E-E




Copyright FCI.

dr	Ruan MT	2014/03/21	projection 	MM 	size	A4	scale	1:1
eng	De-Ming Lu	2014/04/02			ecn no	-		
chr	-	-			rel level	Released		
appr	Pei-Ming Zheng	2014/04/02	product family	PwrBlade	rev	A		
	title	4ACP+24S+2ACP+8S+1P RIGHT ANGLE SOLDER HEADER		dwg no	51939-847			
www.fci.com	cat. no.	-	Product - Customer Drw	sheet 2 of 4				

PRODUCT NUMBER

51939-847--
NOTE: 3

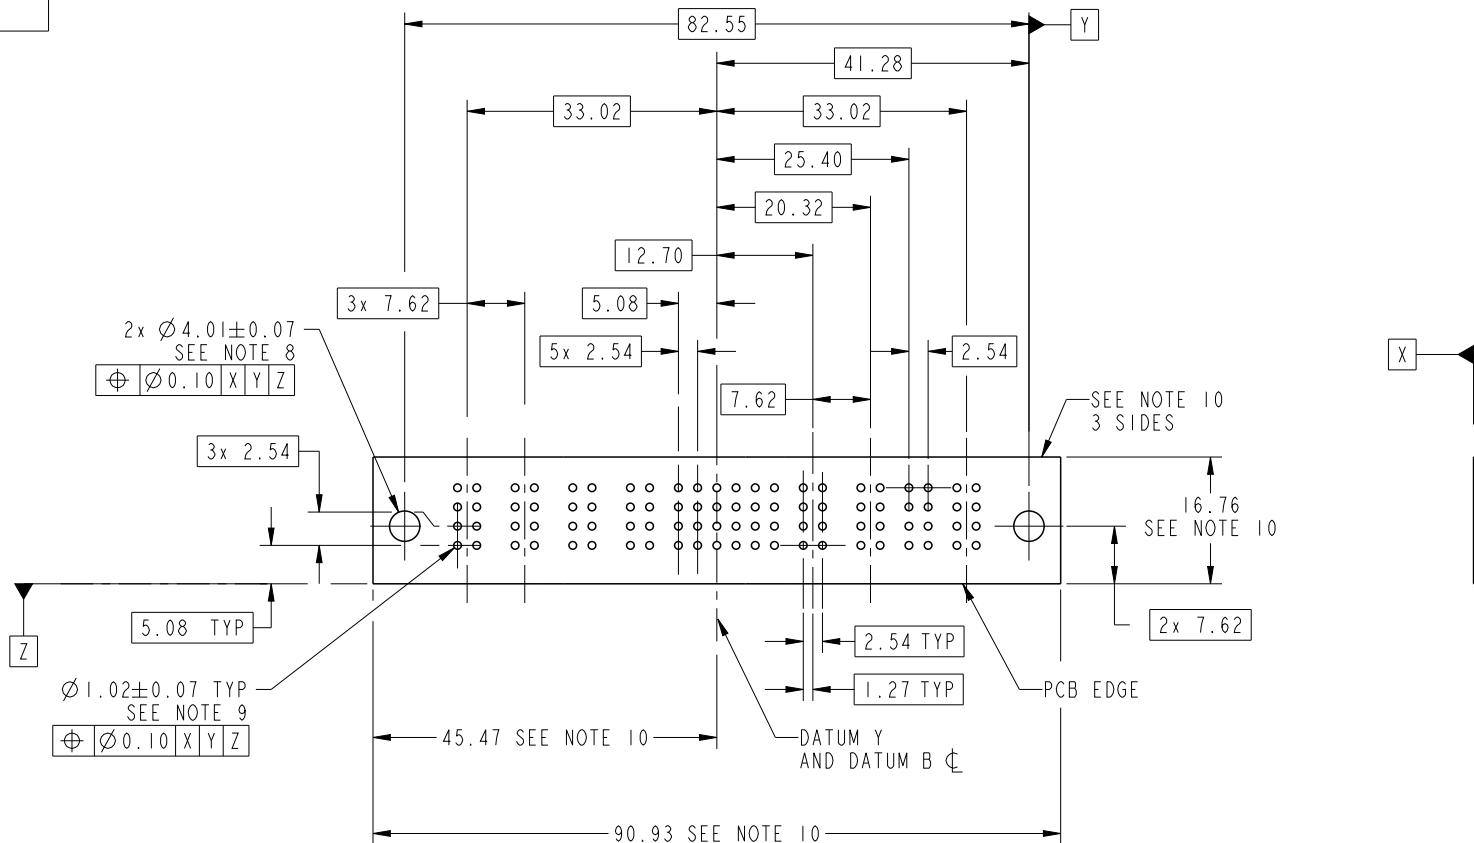

RECOMMENDED PCB LAYOUT

dr	Ruan MT	2014/03/21	projection 	MM 	size	A4	scale	1:1	
eng	De-Ming Lu	2014/04/02			ecn no	-			
chr	-	-			rel level	Released			
appr	Pei-Ming Zheng	2014/04/02	product family	PwrBlade					
		title	4ACP+24S+2ACP+8S+IP RIGHT ANGLE SOLDER HEADER		dwg no	51939-847		rev	A
www.fci.com		cat. no.	-		Product - Customer Drw			sheet 3 of 4	

PRODUCT NUMBER

51939-847--
NOTE: 3

NOTES:

1. DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5M, 1994 UNLESS OTHERWISE SPECIFIED.

CONNECTOR NOTES:

- 2. HOUSING MATERIAL: UL 94 V-0 GLASS FILLED HIGH-TEMP THERMOPLASTIC
POWER CONTACT MATERIAL: COPPER ALLOY
SIGNAL PIN MATERIAL: COPPER ALLOY
- 3. SEE ITEM 1 & 2 IN PRINT 10064183 FOR PLATING SPEC OF 51939-847 AND 51939-847LF RESPECTIVELY.
- 4. MANUFACTURER'S NAME, DATE CODE AND OPTIONAL P/N TO APPEAR ON THIS SURFACE. THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 5. PRODUCT SPECIFICATION GS-12-149.
APPLICATION SPECIFICATION BUS-20-067.
- 6. PACKAGED IN TRAYS.

PCB NOTES:

- 7. ALL HOLE DIAMETERS ARE FINISHED HOLE SIZE.
- 8. MOUNTING HOLES, WHERE APPLICABLE, ARE UNPLATED.
- 9. $\varnothing 1.151 \pm 0.025$ DRILLED HOLES PLATED WITH
0.008 MIN SnPb OR Sn OVER 0.03
TO 0.08 Cu PLATING TO ACHIEVE
 $\varnothing 1.02 \pm 0.07$ HOLE.
- 10. CONNECTOR KEEP-OUT ZONE.



Copyright FCI.

dr	Ruan MT	2014/03/21	projection 	MM 	size	A4	scale	1:1	
eng	De-Ming Lu	2014/04/02			ecn no	-			
chr	-	-							
appr	Pei-Ming Zheng	2014/04/02	product family	PwrBlade	rel level	Released			
	title	4ACP+24S+2ACP+8S+1P RIGHT ANGLE SOLDER HEADER			dwg no	51939-847		rev	A
www.fci.com	cat. no.	-	Product - Customer Drw			sheet 4 of 4			