


**Universal  
Panel Mounting**

**Shock-Safe Fuseholders**







- FaxBack Document # 501
- North American 1/4" x 1 1/4"
- International 5x20mm
- UL 512, IEC 257

No. **800816** for 1/4" x 1 1/4"  
No. **800815** for 5x20mm



**Low Profile**

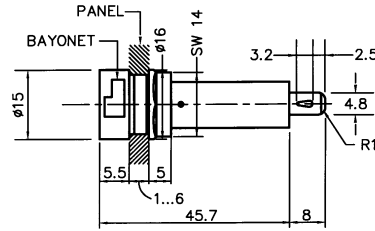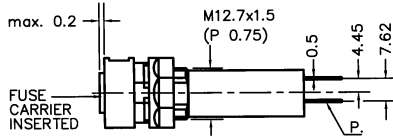

- **Rated Voltage:** 250V
- **Mounting:** 12.7mm diameter D-Hole or double D-Hole as desired  
Admissible torque on plastic hex nut is 1.2Nm
- **Terminals:** Solderable or 4.8mm (3/16") quick connect
- **Material:** Body: Black thermoplastic (Polyamide PA 6.6), UL 94-V0 rated  
Metal parts: Copper alloy, corrosion protected  
Terminals: Tinned for soldering
- **Electrical Data:** Admissible fuse power dissipation: 2.5W at 40°C  
Conductor cross-section min.: 2.5mm<sup>2</sup>  
Rated current, approved: 10A acc. to SEMKO and VDE  
16A acc. to UL and CSA  
Testing voltage: 4kV, 50Hz, 1 min., dry  
Protection class: IP 40 acc. to EN 60529



- **Approvals:** UL Recognized: File No. E 70164  
CSA: File No. 47574  
VDE: File No. 49838  
SEMKO: File No. 8727099

- **Individual Part Numbers:**  
Holder: No. 800 0000 00  
Carrier, 1/4" x 1 1/4": No. 816 0000 00  
Carrier, 5x20mm: No. 815 0000 00



No. **801816** for 1/4" x 1 1/4"  
No. **801815** for 5x20mm





No. **802816** for 1/4" x 1 1/4"  
No. **802815** for 5x20mm



**High Profile**

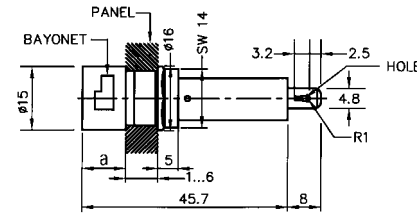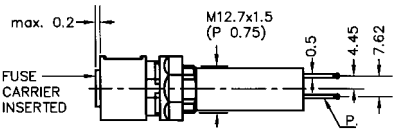

a = 10mm (801)  
a = 15mm (802)



- **Rated Voltage:** 250V
- **Mounting:** 12.7mm diameter D-Hole or double D-Hole as desired  
Admissible torque on plastic hex nut is 1.2Nm
- **Terminals:** Solderable or 4.8mm (3/16") quick connect
- **Material:** Body: Black thermoplastic (Polyamide PA 6.6), UL 94-V0 rated  
Metal parts: Copper alloy, corrosion protected  
Terminals: Tinned for soldering
- **Electrical Data:** Admissible fuse power dissipation: 2.5W at 40°C  
Conductor cross-section min.: 2.5mm<sup>2</sup>  
Rated current, approved: 10A acc. to SEMKO and VDE  
16A acc. to UL and CSA  
Testing voltage: 4kV, 50Hz, 1 min., dry  
Protection class: IP 40 acc. to EN 60529

- **Approvals:** UL Recognized: File No. E 70164  
CSA: File No. 47574  
VDE: File No. 49838  
SEMKO: File No. 8727099

- **Individual Part Numbers:**  
Holder, 10mm Collar: No. 801 0000 00  
Holder, 15mm Collar: No. 802 0000 00  
Carrier, 1/4" x 1 1/4": No. 816 0000 00  
Carrier, 5x20mm: No. 815 0000 00