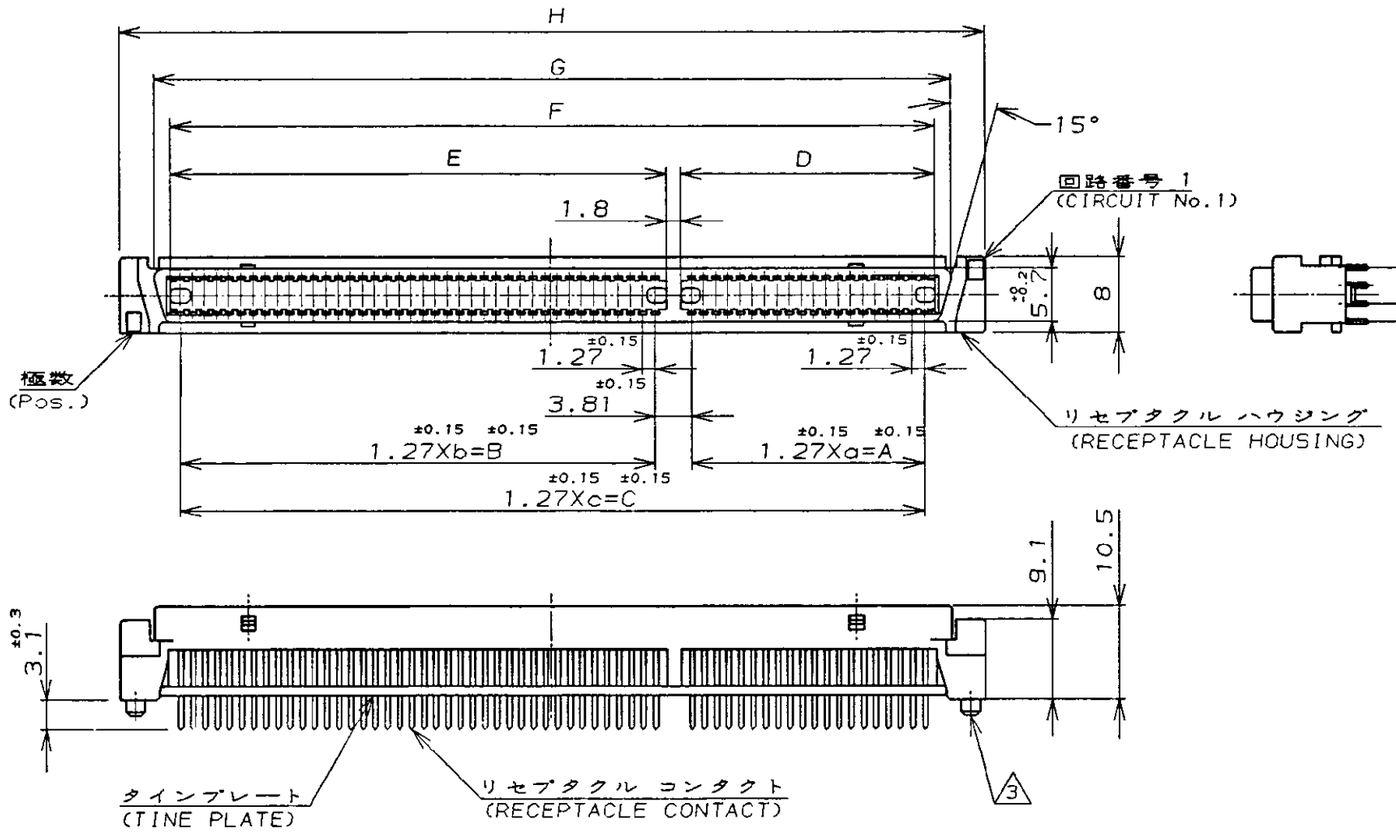

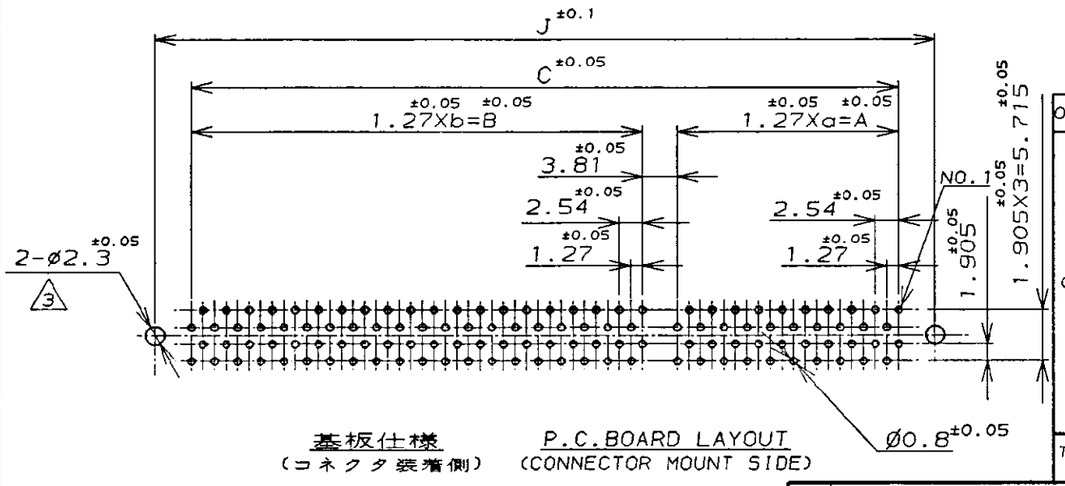

基板仕様
(コネクタ装着側)

P.C.BOARD LAYOUT
(CONNECTOR MOUNT SIDE)

NOTE:

1. MATERIAL: HOUSING: GLASS FILLED 66NYLON (UL 94V-0) BLACK.
   CONTACT: PHOSPHOR-BRONZE
2. FINISH: CONTACT: 0.3μ MIN. Au AT CONTACT AREA,
   1μ MIN. TIN LEAD AT TINE, OVER Ni
3. BOSS FOR POSITIONING: P/N -1, -2, -3, -4

注記:

1. 材料: *ハウジング: ガラス入り66ナイロン (UL 94V-0) 色、黒。
   *コンタクト: 燐青銅。
2. 表面仕上げ:
   *コンタクト: 全面1.3μ以上のニッケル下地メッキに接触部0.3μ以上の金メッキ, 脚部1μ以上の半田メッキ
3. ボスは型番 -1, -2, -3, -4 のみ

THK OF GOLD	Pos.	a	A	b	B	c	C	D	E	F	G	H	J	P/N
0.76μm	100	—	—	—	—	49	62.23	—	—	64.23	67.32	74.85	72.2	2-176373-4
0.3μm	180	39	49.53	49	62.23	—	115.57	51.53	64.23	117.57	120.66	128.19	125.54	176373-8
	160	29	36.83	49	62.23	—	102.87	38.83	64.23	104.87	107.96	115.49	112.84	176373-7
	140	29	36.83	39	49.53	—	90.17	38.83	51.53	92.17	95.26	102.79	100.14	176373-6
	120	19	24.13	39	49.53	—	77.47	26.13	51.53	79.47	82.56	90.09	87.44	176373-5
	100	—	—	—	—	49	62.23	—	—	64.23	67.32	74.85	72.2	176373-4
	80	—	—	—	—	39	49.53	—	—	51.53	54.62	62.15	59.5	176373-3
	60	—	—	—	—	29	36.83	—	—	38.83	41.92	49.45	46.8	176373-2
	40	—	—	—	—	19	24.13	—	—	26.13	29.22	36.75	34.1	176373-1

LTR	REVISION RECORD	DR	CHK	DATE
B	REVISED (FJ00-2347-95)	S.T	Y.F	8-MAR-'95
A	REVISED (J-13009)	S.I	Y.F	30/JAN/'91
0	RELEASED (J-12583)	S.I	Y.F	30/NOV/'90

AMP

AMP (JAPAN), LTD.
Tokyo, Japan

WIRE RANGE mm² (AWG -)	INSULATION DIA - mmø
MATERIAL 1	FINISH 2
DR. 3-AUG-'89 S.ISHIKAWA	DE. 8-MAR-'90 S.ISHIKAWA
CHK. 8-MAR-'90 Y.FUJIURA	APP. 30/JAN/'91 Y.FUJIURA

NAME: AMP FH CONNECTOR RECEPTACLE (VERTICAL) FOR 13mm STACKING

GENERAL TOLERANCE	SIZE	LOC	NUMBER
0<≦ 10 : ±0.2 10<≦ 30 : ±0.25 30<≦100 : ±0.3 ANGLES : ±3°	A3	J	C-176373
	SCALE NOT SCALE	REV. B	SHEET 1 OF 1

CUSTOMER DRAWING

NUMBER C-176373
3rd ANGLE PROJECTION
METRIC
DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT
PRINT DIST

AMP-J
REV. 10/'83