

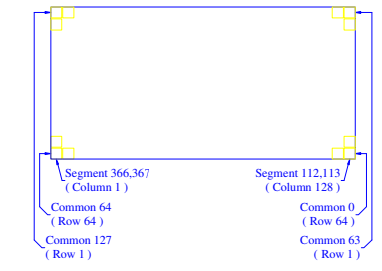
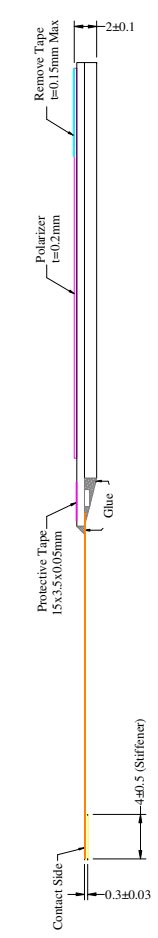


Item	Date	Remark
A	20120830	Original Drawing

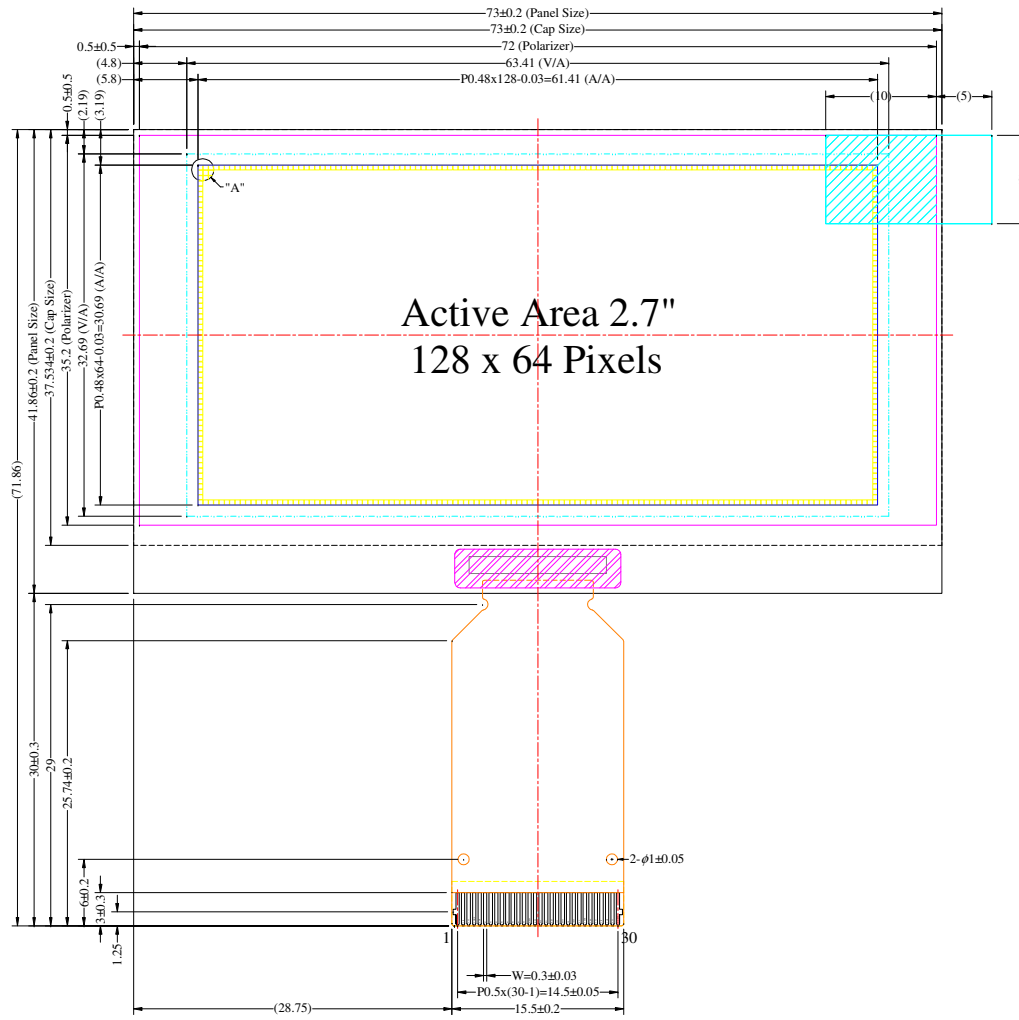

Pin	Symbol
1	N.C.(GND)
2	VSS
3	VCC
4	VCOMH
5	VLSS
6	D7
7	D6
8	D5
9	D4
10	D3
11	D2
12	D1
13	D0
14	ERD#
15	R/W#
16	BS0
17	BS1
18	D/C#
19	CS#
20	RES#
21	FR
22	REF
23	N.C.
24	VDDIO
25	VDD
26	VCI
27	VSL
28	VLSS
29	VCC
30	N.C.(GND)

- Notes:
- Color: Yellow
 - Driver IC: SSD1322
 - FPC Number: UT-0222-P04
 - Interface:
8-bit 68XX/80XX Parallel, 3-/4-wire SPI
 - General Tolerance: ± 0.30
 - The total thickness (2.10 Max) is without polarizer protective film & remove tape.
The actual assembled total thickness with above materials should be 2.35 Max.

<i>Customer Approval Signature</i>	WiseChip Semiconductor Inc.							Drawing Number	Rev.				
	UG-2864ASYIG01 Folding Type OEL Display Module Pixel Number: 128 x 64, Monochrome, COG Package							DMG2864CNGFBR	A				
	Material							Soda Lime / Polyimide					
	Tolerance							Drawn	E.E.	Panel / E.	P.M.	Scale	Sheet
Unit		mm		Title	By	Date	20120830	20120830	20120830	20120830	1:1	1 of 1	A3
General Roughness		Ⓢ		Dimension	±0.3	Angle	±1						