


Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0201 X5R 47nF 6.3V (0201X473K6R3CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0201 (0603)	0.60±0.03	0.30±0.03	0.30±0.03


2. Cap, DF, IR @25°C

(Cap, DF @1KHz, 0.5Vrms ; IR @6.3V, 120sec)

Item	Spec
Cap [nF]	47(±10%)
DF	≤10%
IR [G-ohm]	>2.13 min


3. Impedance/ESR-Frequency

(Equipment: 4294A)

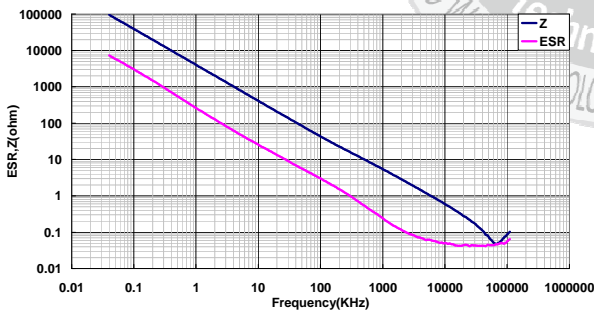

4. Capacitance – Temperature Characteristics


(Equipment: 4284A)

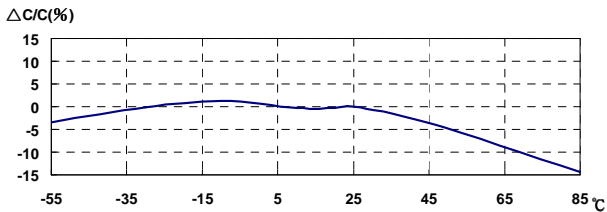

5. Capacitance – DC Voltage Characteristics

(Equipment: 4284A; DC charge 60±5sec)

3V :- 25.79% ; 6.3V :- 57.64%

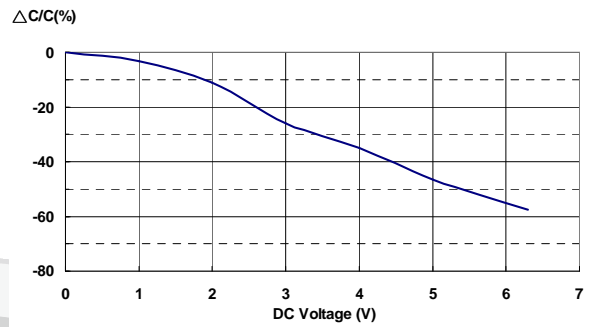

6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

