


NOTES:

1.0 SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: DC to 18.0 GHz
- 1.2 MAXIMUM INPUT POWER: 3 WATTS AVG. AT +25°C DERATED LINEARLY TO 1 WATT AT +125°C
- 1.3 OPERATING TEMP. RANGE: -65°C to +125°C
- 1.4 IMPEDANCE: 50 OHMS
- 1.5 MAXIMUM VSWR: 1.05 + .008f(GHz)

$\triangle 2$ MARK THIS SURFACE USING WHITE INK. (REF: INK-02650-27-01)

3.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

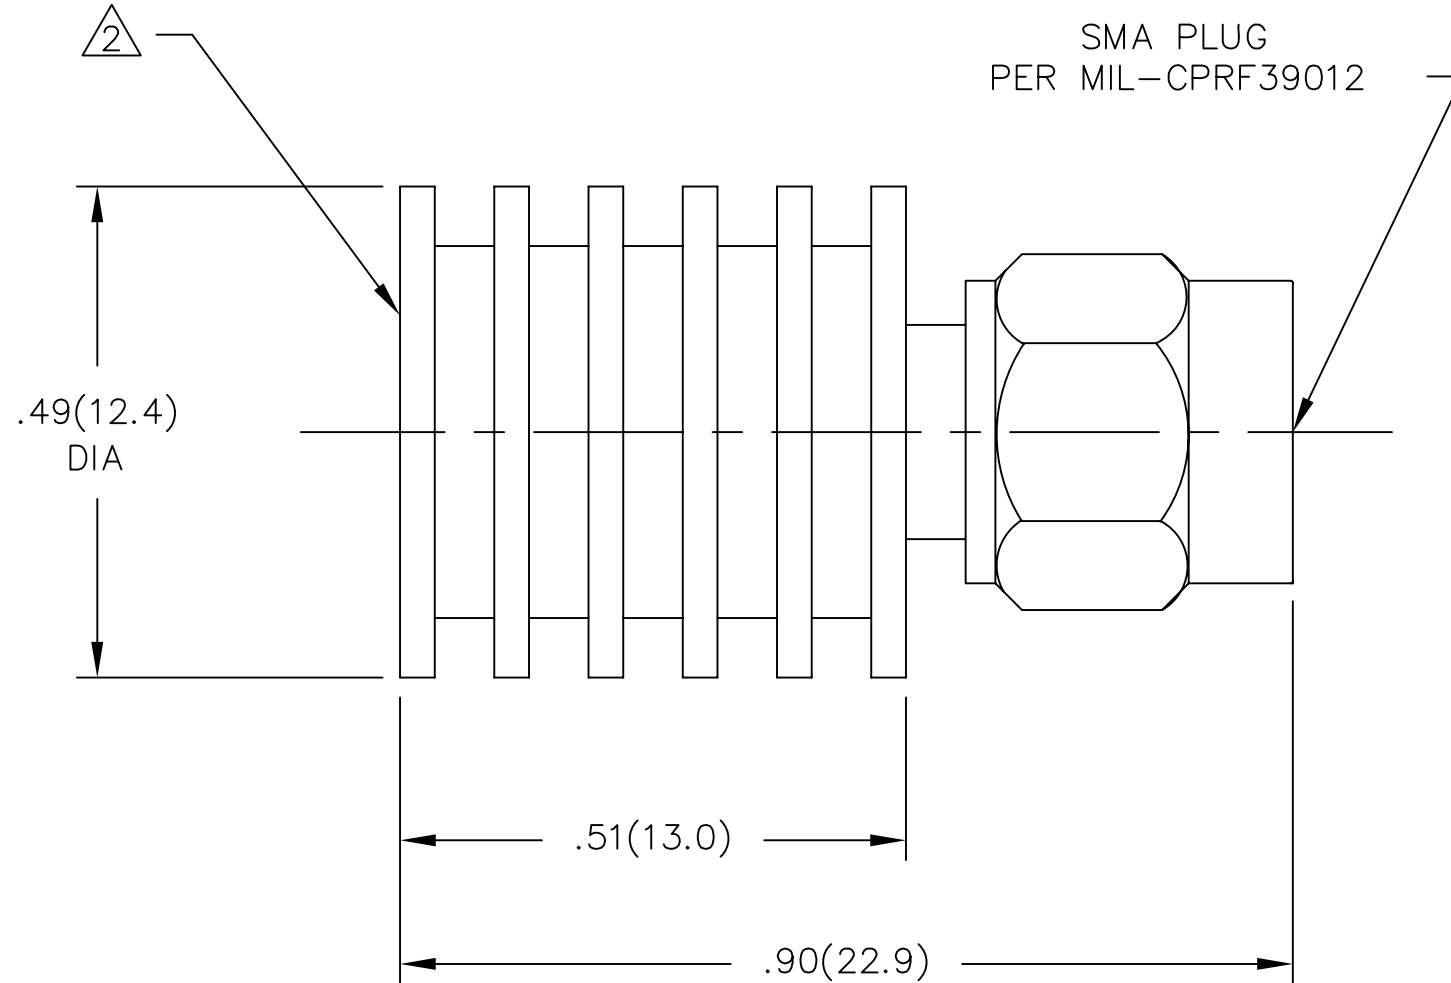

MODEL NUMBER
TRM-2057-MO-SMA-07
REV.
E1

REV.	DESCRIPTION	DATE
-	RELEASED	2/12/79
A	ECR 2556	12/19/83
B	ECR 6545	6/30/89
C	ECR 6943	11/13/89
D	ECR 7291	4/2/90
D1	CHNGE XX TO MX	12/11/90
D2	UPDATE MODEL NO.	5/17/91
E	REDRAW ON CAD	5/27/94
E1	ADDED TITLEBLOCK	10/27/05

DWG. NO. WAS: 02749-01-00
& TRM-2057-MX-000-07

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°	FSCM NO. 34078	MIDWEST MICROWAVE	
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave	TITLE TERMINATION	
	DRAWN/DATE M.HOLLMAN 5/27/94	ENG./DATE G.KOZAK 6/7/94	DRAWING NUMBER TRM-2057-MO-SMA-07
	CHECKED/DATE A.BEATTY 6/1/94	APPROVED/DATE	SCALE: 5=1 SHEET 1 of 1