

## Protective covers - HC-STA-D07-BCLFS-PLR-BK - 1419270

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Protective cover D7, for single locking latch, material: PA, protective cover material: PA, height: 29.4 mm, seal: yes, Standard, With lanyard, diameter of retaining cord eyelet: 25 mm, for socket inserts



COMPLIANT

### Key Commercial Data

Packing unit	1 pc
GTIN	 4 0 5 5 6 2 6 1 6 0 2 1 4
GTIN	4055626160214

### Technical data

#### Dimensions

Height	29.4 mm
Width	34.2 mm
Length	26.5 mm

#### Ambient conditions

Degree of protection (IP)	IP66
Ambient temperature (operation)	-20 °C ... 100 °C

#### General

Note	For use on the panel mounting base
Size	D7
Type	For supporting base element with single locking latch
Housing type	Protective cover
Color	black
Locking type	for single locking latch
Material	PA
Housing material	PA
Seal material	NBR
Material, protective cover	PA

# Protective covers - HC-STA-D07-BCLFS-PLR-BK - 1419270

## Technical data

### General


Flammability rating according to UL 94	V0 (Polyamide housing)
Connection	Plastic protective cover for short-term protection

### Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

## Drawings

Dimensional drawing

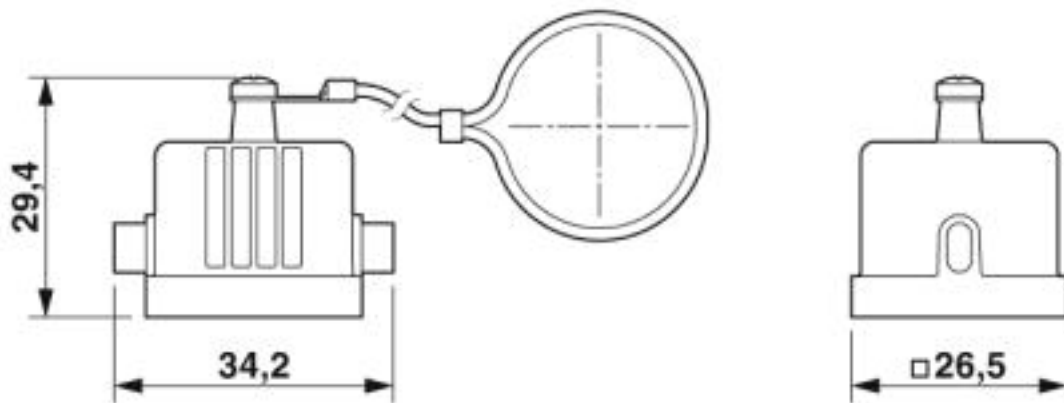

Dimensional drawing

## Approvals

### Approvals

#### Approvals

EAC / DNV GL

#### Ex Approvals

### Approval details

EAC		RU C- DE.AI30.B.01102
-----	--	--------------------------

## Protective covers - HC-STA-D07-BCLFS-PLR-BK - 1419270

### Approvals

DNV GL



<https://approvalfinder.dnvgl.com/>

TAE000037S

Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>