

1

2

3


4

5


6

7

2000±50

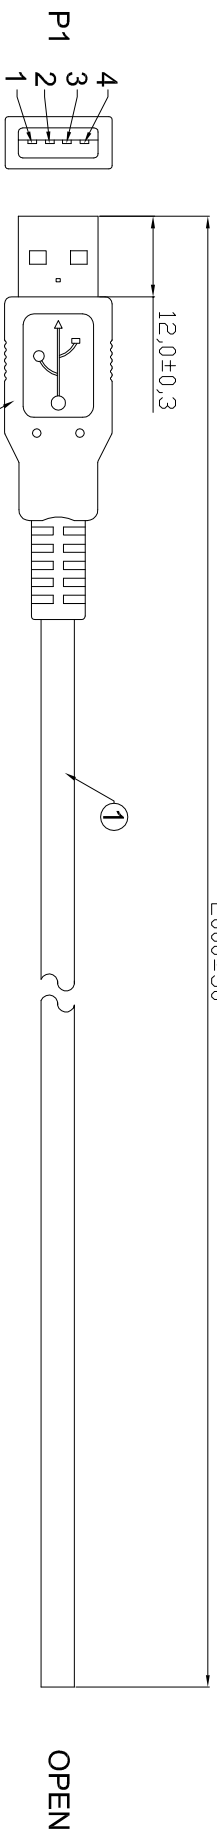

- ① Cable Black print
AWM STYLE 2725 80°C 30V VW-1 28AWG/1P 24AWG/2C
---C AWM I/III A 80°C 30V FT1 USB 1.1 CABLE



A

B

C



D

E

F

G

H

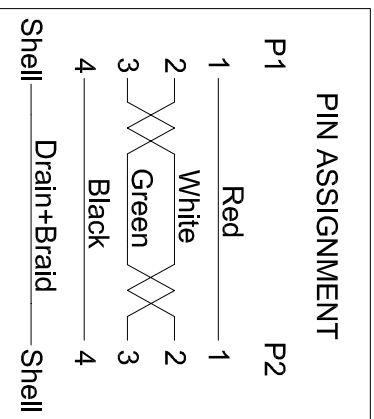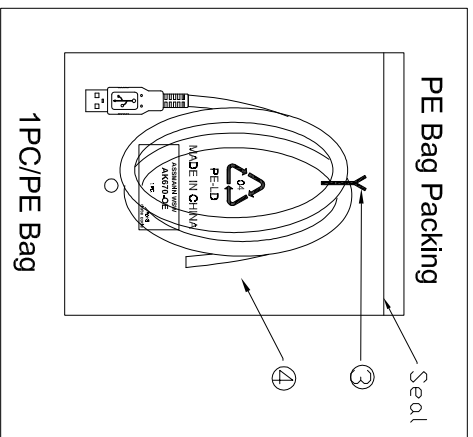

- Electrical test:**
1. 100% short, open, miss wire test
 2. Conduct resistance: 2 Ohm max.
 3. Insulator resistance: 5MΩ min.
 4. Dielectric test: DC 300V

⑤	PE Bag	1	Clear Print black "MADE IN CHINA"+ "1PC"
④	TIE	1	White
③	Out Jacket	NA	Beige(BG002) PVC-45P
②	CONN	1	USB A Male Shell:Nickel Pin:G/F Insulator color:White
①	Cable	1	USB1.1 UL2725 28#/1P+24#/2C+AEB OD:4.7mm Beige(BG002)

SPECIFICATION

Customer-No.

ASSMANN WSW-No.

AK670-OE

Drawing-No.

ASS 7244 CA

rev01



Replace

Sheet

ROHS compliant

Unit: mm

Scale	Free									
	TOLERANCE									
DIM	TOL	①	Update the drawing	09.05.2016	Amy					
	Angle	①	Drawn	24.10.2014	Amy					
			Modification							

1

2

3

4

5

6

7