


1. MECHANICAL DIMENSIONS :

REV.	DATE	DESCRIPTION
01	Oct. 31, '14	1st RELEASE

A  
B  
C  
D  
E  
F

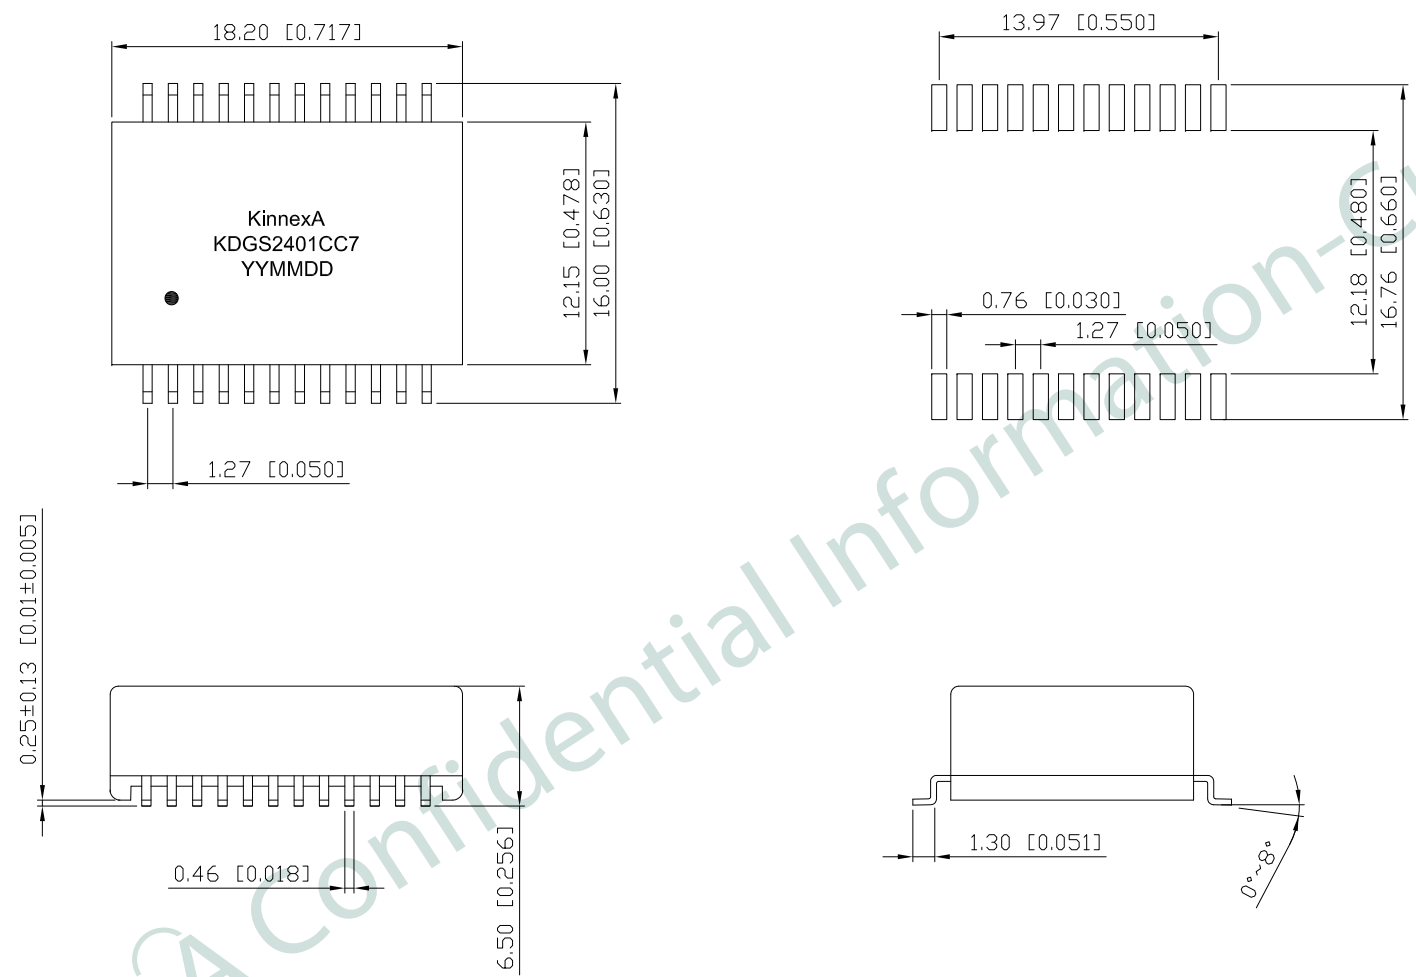

NOTES:  
 1. OPERATING TEMPERATURE: 0°C~+70°C  
 2. DIMENSIONS: mm [INCHES]  
 UNLESS OTHERWISE SPECIFIED, ALL TOLERANCES ARE ±0.25 [0.010]

PART NO KTFZ-DGS2401CC7				
TITLE	100/1000 BASE-T TRANSFORMER			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	RYAN	LED	Oct. 31, '14	1 of 2

DWG NO KTFZ-DGS2401CC7


**PRELIMINARY RELEASE SUBJECT TO CHANGE**

※ THIS DRAWING IS A CONTROLLED DOCUMENT ※

Connected by **KinnexA**

RoHS Compliant

2. SCHEMATIC :

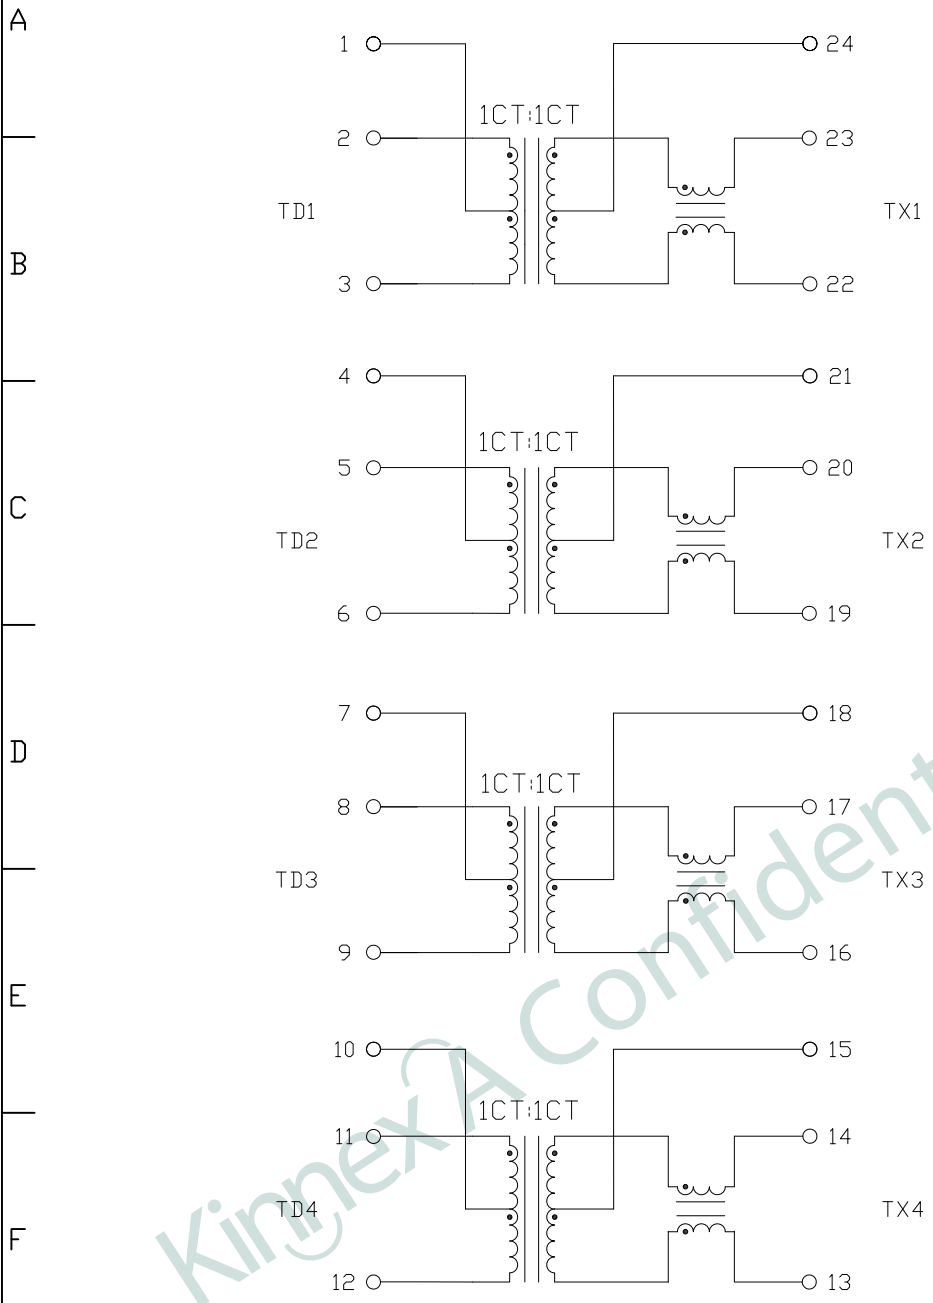

3. ELECTRICAL CHARACTERISTICS :

TEST NOTES:(25°±5°C)

1. TR:  
INPUT TO OUTPUT=1:1±5%
2. LX:(100KHz, 200mV WITH, 8mA, DC Bias)  
350uH MINIMUM
3. HIPOT:  
INPUT TO OUTPUT : 1500VAC FOR 60 SECONDS
4. CROSS TALK:  
-35dB MINIMUM AT 0.3MHz TO 30MHz  
-32dB MINIMUM AT 60MHz TO 100MHz
5. INSERTION LOSS:  
-1.1dB MAXIMUM AT 0.3MHz TO 100MHz
6. RETURN LOSS:  
-18dB MINIMUM AT 0.3MHz TO 30MHz  
-14.4dB MINIMUM AT 40MHz  
-13.1dB MINIMUM AT 50MHz  
-12dB MINIMUM AT 60MHz TO 80MHz
7. DCMR (dB Min)  
-40dB MINIMUM AT 30MHz  
-35dB MINIMUM AT 60MHz  
-30dB MINIMUM AT 80MHz TO 100MHz

PART NO		KTFZ-DGS2401CC7		
TITLE	100/1000 BASE-T TRANSFORMER			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	RYAN	LED	Oct. 31, '14	2 of 2

DWG NO KTFZ-DGS2401CC7

**PRELIMINARY RELEASE SUBJECT TO CHANGE**

※ THIS DRAWING IS A CONTROLLED DOCUMENT ※