



DIODES

SMF5V0A to SMF58A

ESD Protection Diodes Provide High Surge Capability of 200 W in Low Profile SMF (DO-219AB) Package



KEY BENEFITS

- Low profile SMF (DO-219AB) package
 - Typical height of 1 mm
- High surge capability of 200 W at 10/1000 μ s
- Features “low noise” technology
- Very fast response times
- Working voltages from 5 V to 58 V
- Peak pulse current from 2.1 A to 21.7 A
- Operating temperatures from -65 °C to +175 °C
- Provides ESD capability of \pm 30 kV (air and contact discharge) in accordance with IEC 61000-4-2
- Meets the MSL Level 1 standard per J-STD-020

APPLICATIONS


- Line transient voltage protection in space-constrained electronics, such as laptops notebooks, tablets, external hard drives, and more

RESOURCES


- Datasheet: SMF5V0A to SMF58A - www.vishay.com/ppg?85881
- For technical questions contact ESDProtection@vishay.com
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



Surface-Mount ESD Protection Diodes

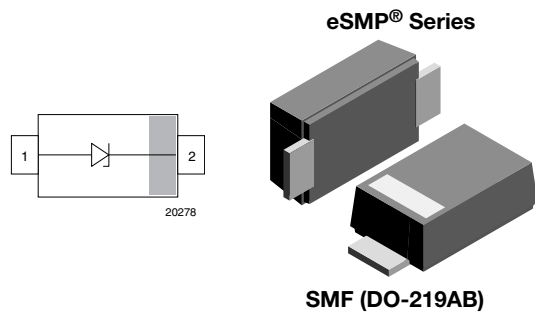

MARKING (example only)



Bar = cathode marking

YY = type code (see table below)

XX = date code

ADDITIONAL RESOURCES



FEATURES

- 200 W peak pulse power capability with a 10/1000 μ s waveform, repetition rate (duty cycle): 0.01 %
- Low profile package
- Wave and reflow solderable
- ESD immunity acc. IEC 61000-4-2 \pm 30 kV contact discharge \pm 30 kV air discharge
- ESD capability according to AEC-Q101: human body model: class H3B: > 8 kV
- Low incremental surge resistance, excellent clamping capability
- “Low Noise” technology - very fast response time
- AEC-Q101 qualified available
- Material categorization: for definitions of compliance please see www.vishay.com/doc?999912

AUTOMOTIVE
GRADE
Available



RoHS
COMPLIANT
HALOGEN
FREE
Available

ORDERING INFORMATION

PART NUMBER (EXAMPLE)	ENVIRONMENTAL AND QUALITY CODE				PACKAGING CODE		ORDERING CODE (EXAMPLE)
	AEC-Q101 QUALIFIED	RoHS-COMPLIANT + LEAD (Pb)-FREE TERMINATIONS		TIN PLATED	3K PER 7" REEL (8 mm TAPE), MOQ = 30K	10K PER 13" REEL (8 mm TAPE), MOQ = 50K	
		STANDARD	HALOGEN-FREE				
SMF5V0A-		E		3	-08		SMF5V0A-E3-08
SMF5V0A-			M	3	-08		SMF5V0A-M3-08
SMF5V0A-	H	E		3	-08		SMF5V0A-HE3-08
SMF5V0A-	H		M	3	-08		SMF5V0A-HM3-08
SMF5V0A-		E		3		-18	SMF5V0A-E3-18
SMF5V0A-			M	3		-18	SMF5V0A-M3-18
SMF5V0A-	H	E		3		-18	SMF5V0A-HE3-18
SMF5V0A-	H		M	3		-18	SMF5V0A-HM3-18

Revision: 23-Oct-2019

PACKAGE DATA

PACKAGE NAME	MOLDING COMPOUND	WEIGHT (mg)	HEIGHT MAX. (mm)	LENGTH MAX. (mm)	WIDTH MAX. (mm)	MOLDING COMPOUND FLAMMABILITY RATING	MOISTURE SENSITIVITY LEVEL	WHISKER TEST ACC. JESD 201	SOLDERING CONDITIONS
SMF (DO-219AB)	Standard Halogen-free	15	1.08	3.9	1.9	UL 94 V-0	MSL level 1 (acc. J-STD-020)	Class 2	Peak temperature max. 260 °C



Surface-Mount ESD Protection Diodes

ELECTRICAL CHARACTERISTICS ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)										
PART NUMBER	TYPE CODE		REVERSE BREAKDOWN VOLTAGE at I_T , $t_p = 5\text{ ms}$	TEST CURRENT	STAND-OFF VOLTAGE	MAXIMUM REVERSE CURRENT at V_{RWM}	MAXIMUM PEAK PULSE CURRENT $t_p = 10/1000\text{ }\mu\text{s}$	MAXIMUM REVERSE CLAMPING VOLTAGE at I_{PPM}	TYPICAL CAP. at $V_R = 0\text{ V}$, $f = 1\text{ MHz}$	PROTECTION PATHS
	STD.	HALOGEN-FREE	$V_{BR}\text{ MIN. (V)}$	$I_T\text{ (mA)}$	$V_{RWM}\text{ (V)}$	$I_R\text{ (}\mu\text{A)}$	$I_{PPM}\text{ (A)}$	$V_C\text{ MAX. (V)}$	$C_D\text{ TYP. (pF)}$	$N_{channel}$
SMF5V0A	AE	NE	6.40	10	5	5	21.7	9.2	1120	1
SMF6V0A	AG	NG	6.67	10	6	26	19.4	10.3	1063	1
SMF6V5A	AK	NK	7.22	10	6.5	20	17.9	11.2	938	1
SMF7V0A	AM	NM	7.78	10	7	3	16.7	12	843	1
SMF7V5A	AP	NP	8.33	1	7.5	0.1	15.5	12.9	773	1
SMF8V0A	AR	NR	8.89	1	8	0.1	14.7	13.6	706	1
SMF8V5A	AT	NT	9.44	1	8.5	0.1	13.9	14.4	674	1
SMF9V0A	AV	NV	10	1	9	0.1	13.5	15.4	640	1
SMF10A	AX	NX	11.1	1	10	0.1	11.8	17	562	1
SMF11A	AZ	NZ	12.2	1	11	0.1	11	18.2	509	1
SMF12A	BE	OE	13.3	1	12	0.1	10.1	19.9	483	1
SMF13A	BG	OG	14.4	1	13	0.1	9.3	21.5	423	1
SMF14A	BK	OK	15.6	1	14	0.1	8.6	23.2	392	1
SMF15A	BM	OM	16.7	1	15	0.1	8.2	24.4	367	1
SMF16A	BP	OP	17.8	1	16	0.1	7.7	26	343	1
SMF17A	BR	OR	18.9	1	17	0.1	7.2	27.6	324	1
SMF18A	BT	OT	20	1	18	0.1	6.8	29.2	320	1
SMF20A	BV	OV	22.2	1	20	0.1	6.2	32.4	283	1
SMF22A	BX	OX	24.4	1	22	0.1	5.6	35.5	271	1
SMF24A	BZ	OZ	26.7	1	24	0.1	5.1	38.9	244	1
SMF26A	CE	PE	28.9	1	26	0.1	4.8	42.1	230	1
SMF28A	CG	PG	31.1	1	28	0.1	4.4	45.4	227	1
SMF30A	CK	PK	33.3	1	30	0.1	4.1	48.4	207	1
SMF33A	CM	PM	36.7	1	33	0.1	3.8	53.3	198	1
SMF36A	CP	PP	40	1	36	0.1	3.4	58.1	178	1
SMF40A	CR	PR	44.4	1	40	0.1	3.1	64.5	172	1
SMF43A	CT	PT	47.8	1	43	0.1	2.9	69.4	165	1
SMF45A	CV	PV	50	1	45	0.1	2.8	72.7	162	1
SMF48A	CX	PX	53.3	1	48	0.1	2.6	77.4	161	1
SMF51A	CZ	PZ	56.7	1	51	0.1	2.4	82.4	151	1
SMF54A	CA	PA	60	1	54	0.1	2.25	88	148	1
SMF58A	CC	PC	64.4	1	58	0.1	2.1	95	144	1

Revision: 23-Oct-2019