

DETAILS

Product Number	C15035_STRADELLA-8-T3
Family	Stradella
Type	Lens array
Color	clear
Diameter	49,5+49,5 mm
Height	5,7 mm
Style	rectang
Optic Material	PMMA
Holder Material	
Fastening	pin, screw
Status	production ready
ROHS Compliant	Yes
Date Updated	28/12/2016



OPTICAL PROPERTIES

LED	Viewing Angle	Light Beam	Efficiency	cd/lm	Connector
XT-E	Asymmetric deg	Asymmetric	96 %	0.620	-
XP-G2	sim: Asymmetric	Asymmetric	sim: 91 %	sim: 0.600	-
XP-G3	sim: Asymmetric	Asymmetric	sim: 89 %	sim: 0.510	-
LUXEON 3535 2D	sim: Asymmetric	Asymmetric	sim: 94 %	sim: 0.650	-
LUXEON 3030 2D	sim: Asymmetric	Asymmetric	sim: 94 %	sim: 0.760	-
LUXEON TX	Asymmetric deg	Asymmetric	94 %	0.680	-
NF2x757D	sim: Asymmetric	Asymmetric	sim: 95 %	sim: 0.800	-
NVSxx19B/NVSxx19C	sim: Asymmetric	Asymmetric	sim: 94 %	sim: 0.580	-
NCSxE17A	sim: Asym	Asymmetric	sim: 93 %	sim: 0.900	-
NVSxE21A	sim: Asym	Asymmetric	sim: 94 %	sim: 0.940	-
Oslon Square EC	sim: Asymmetric	Asymmetric	sim: 93 %	sim: 0.700	-
Duris S5 (2 chip)	sim: Asymmetric	Asymmetric	sim: 95 %	sim: 0.740	-
Z8Y19	Asymmetric deg	Asymmetric	94 %	0.800	-
Z8Y22	Asymmetric deg	Asymmetric	94 %	sim: 0.000	-
Z8Y22P	Asymmetric deg	Asymmetric	94 %	0.600	-

H G F E D C B A

4

3

2



1

4



3

2

1

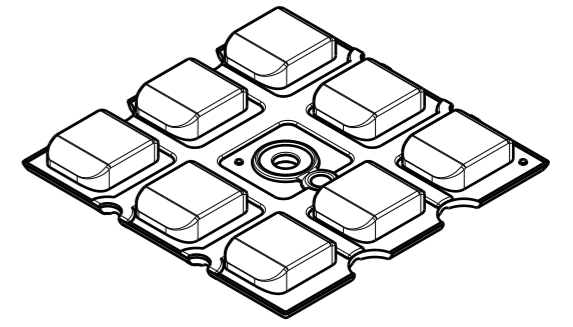

Light direction

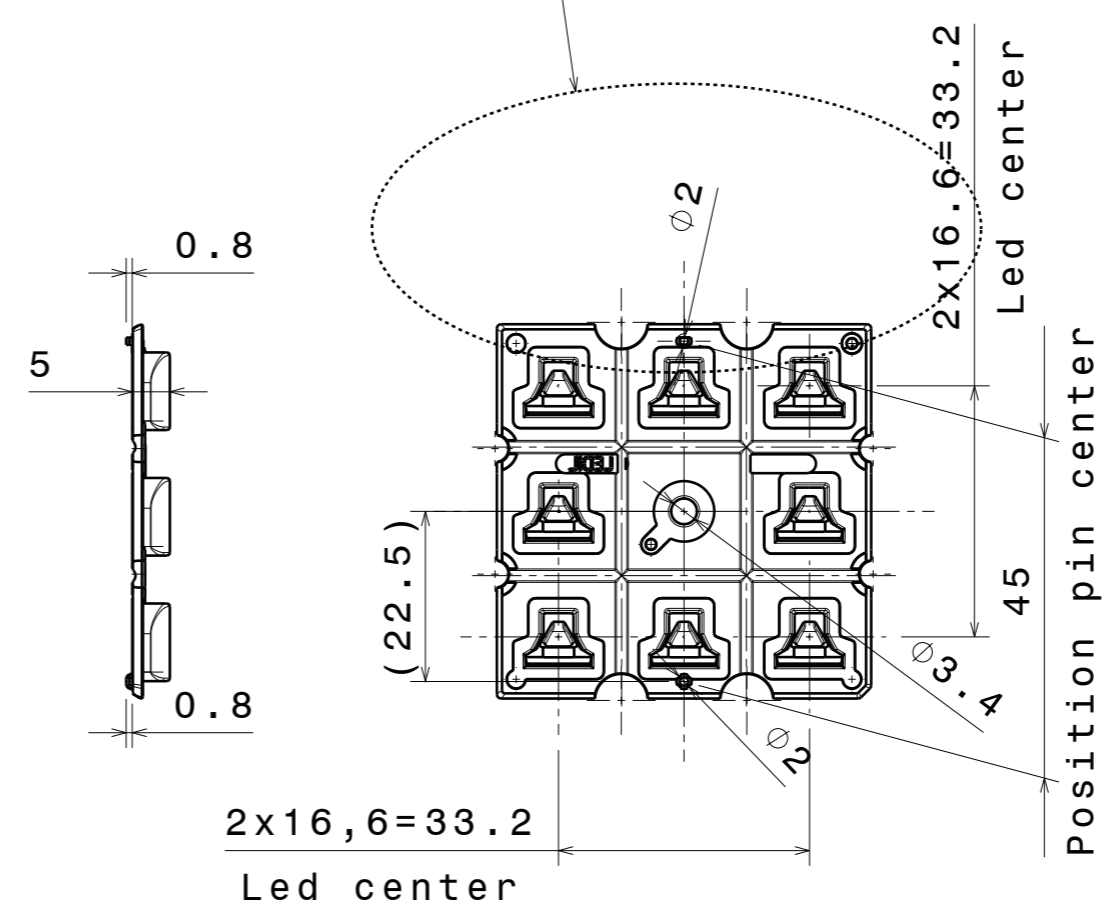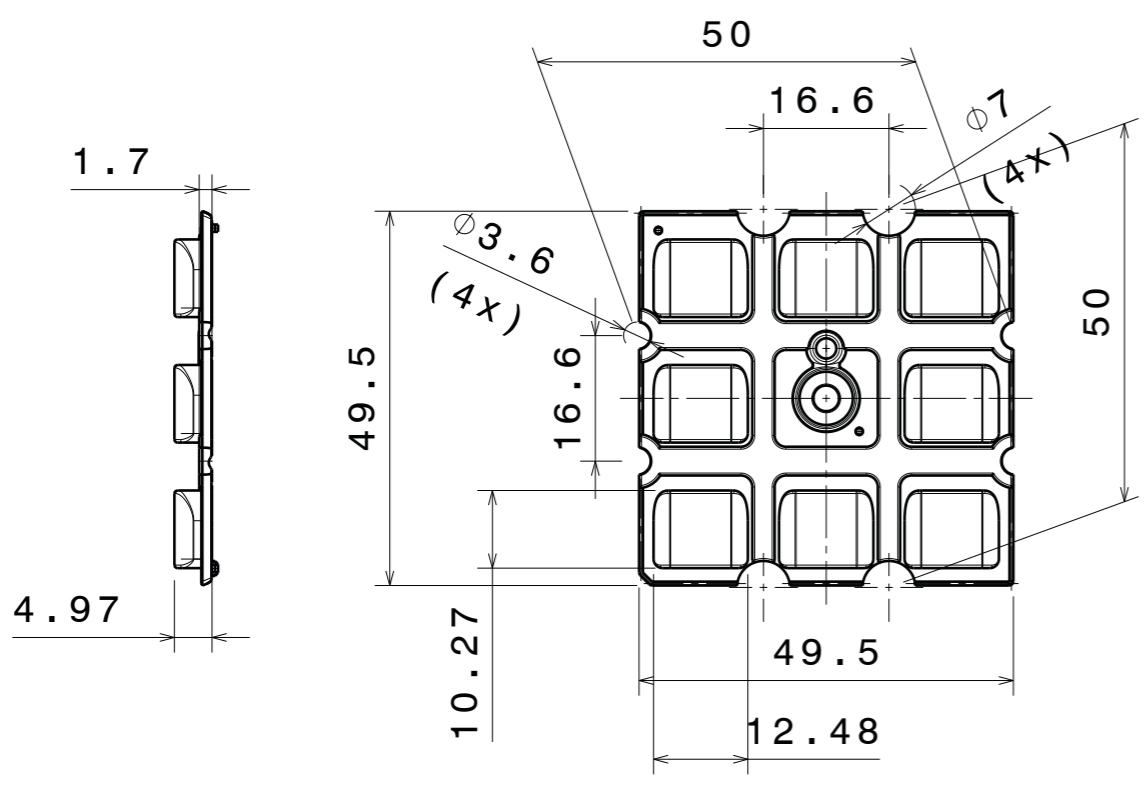

Recommended fixing screw torque 0,6Nm

INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1	C15035	STRADELLA-8-T3	PMMA	Clear

Tolerances if not otherwise shown
According to DIN ISO 2768-1
Linear measures:
up to 30mm class M, otherwise class C
According to DIN ISO 2768-2
Form and position: class L

LEDiL Ledil Oy
Salorankatu 10
FIN 24240 SALO
Finland

THIRD ANGLE PROJECTION:

DRAWING TITLE
C15035_STRADELLA-8-T3

This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.


SIZE **A3** PART NUMBER **C15035**

SCALE **1:1** WEIGHT **6,0** SHEET **1/1**


H G F E D C B A

Luminaire: Ledil C15035_STRADELLA-8-T3_(XT-E)


Lamps: 1 x Cree_XT-E_x8_(XTEAWT-0-2A0-R30-FB0001)_801.566lm@250mA_P=5.9775W_I=0.25A

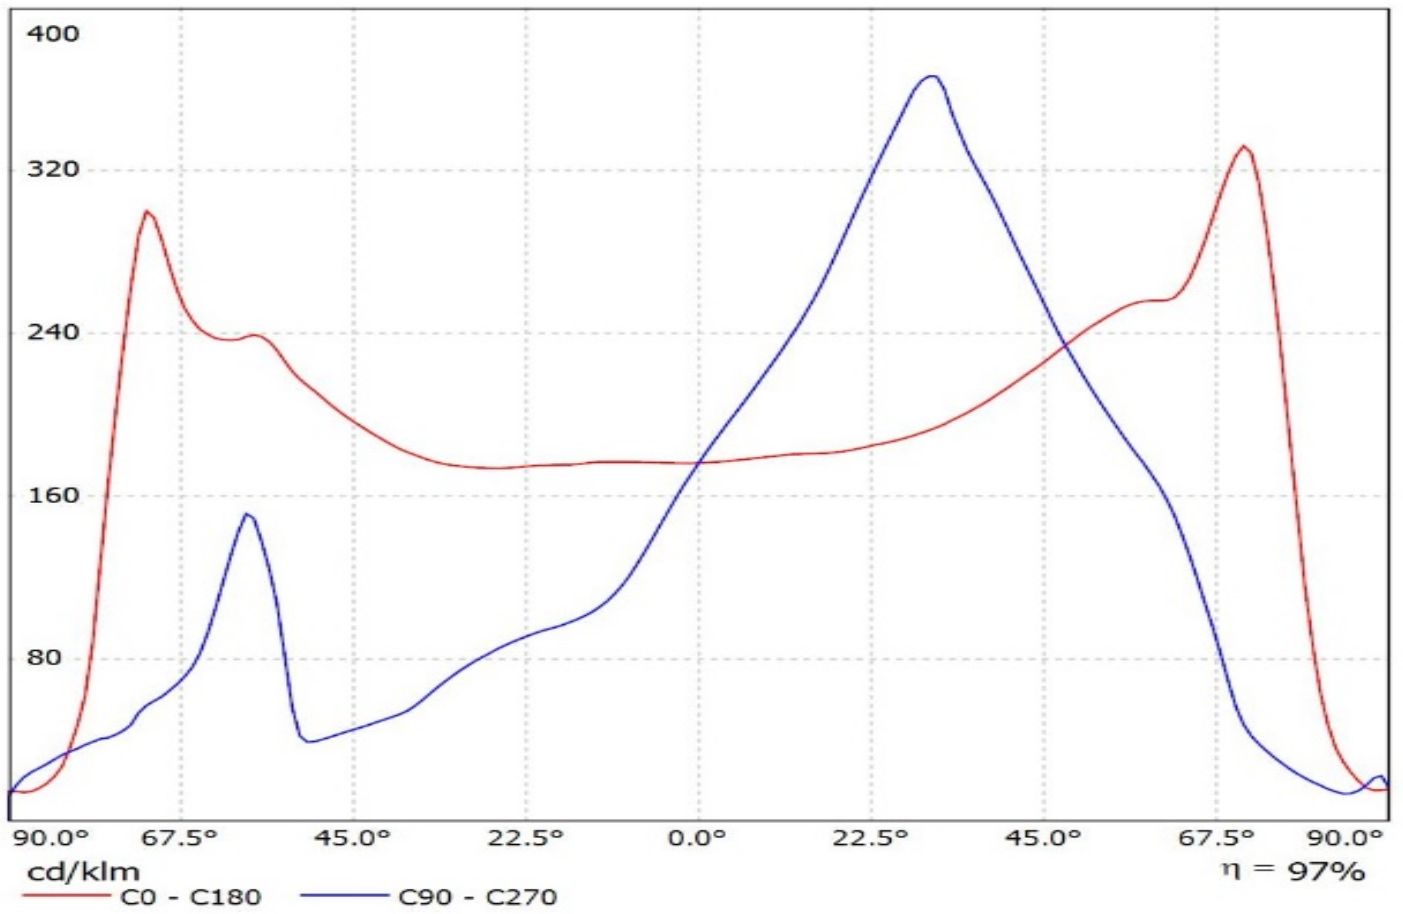


Luminaire: Ledil Oy C15035_STRADELLA-8-T3_(XP-G3)_SIMULATED
Lamps: 1 x Cree XP-G3

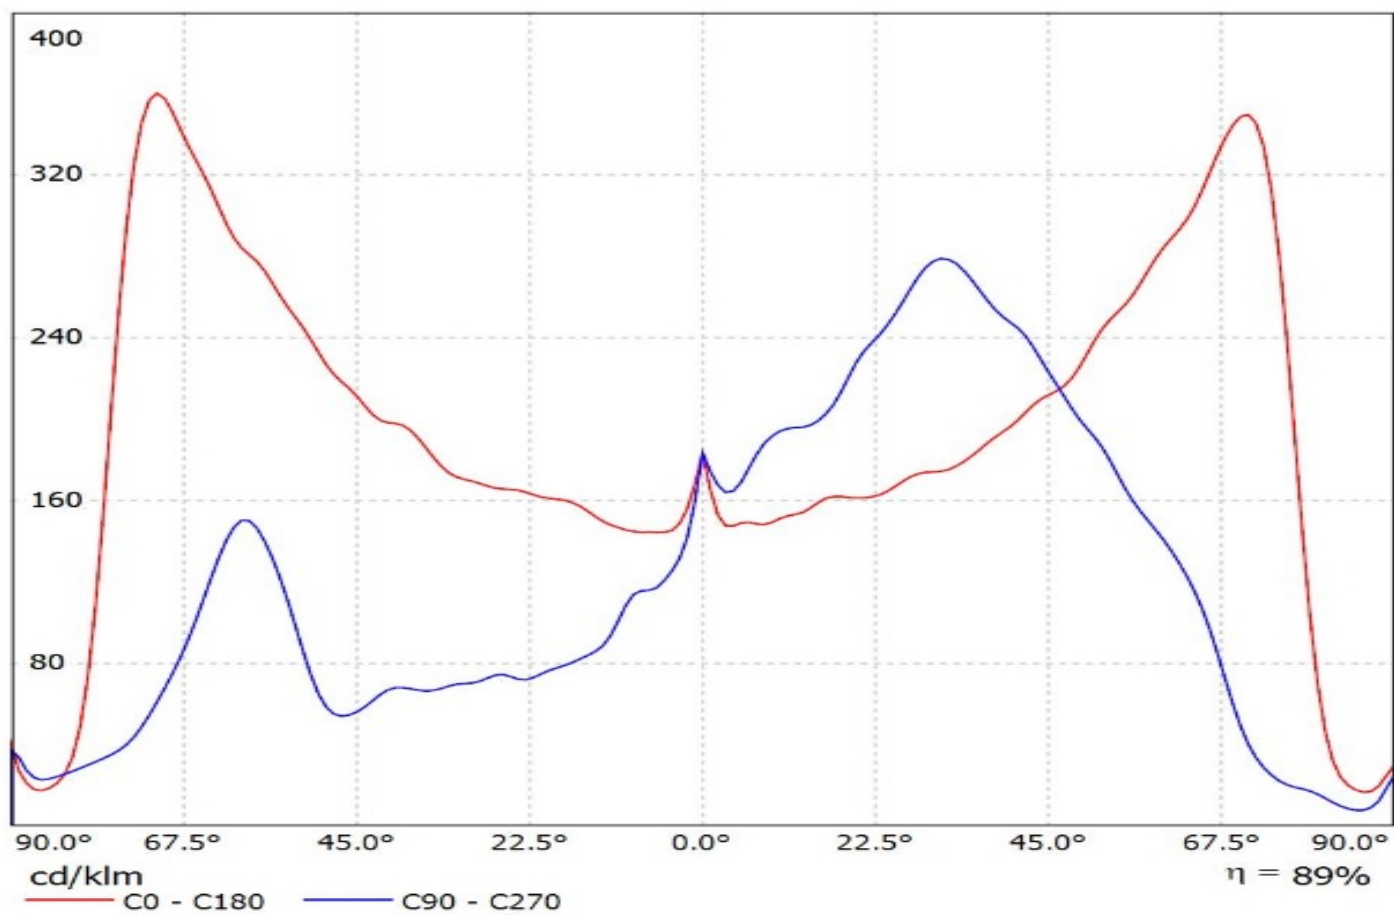


Luminaire: LEDiL Oy C15035_STRADELLA-8-T3_(Luxeon_TX)
Lamps: 1 x Luxeon_TX_693.838lm@250mA_P=5.64523W_I=0.250A

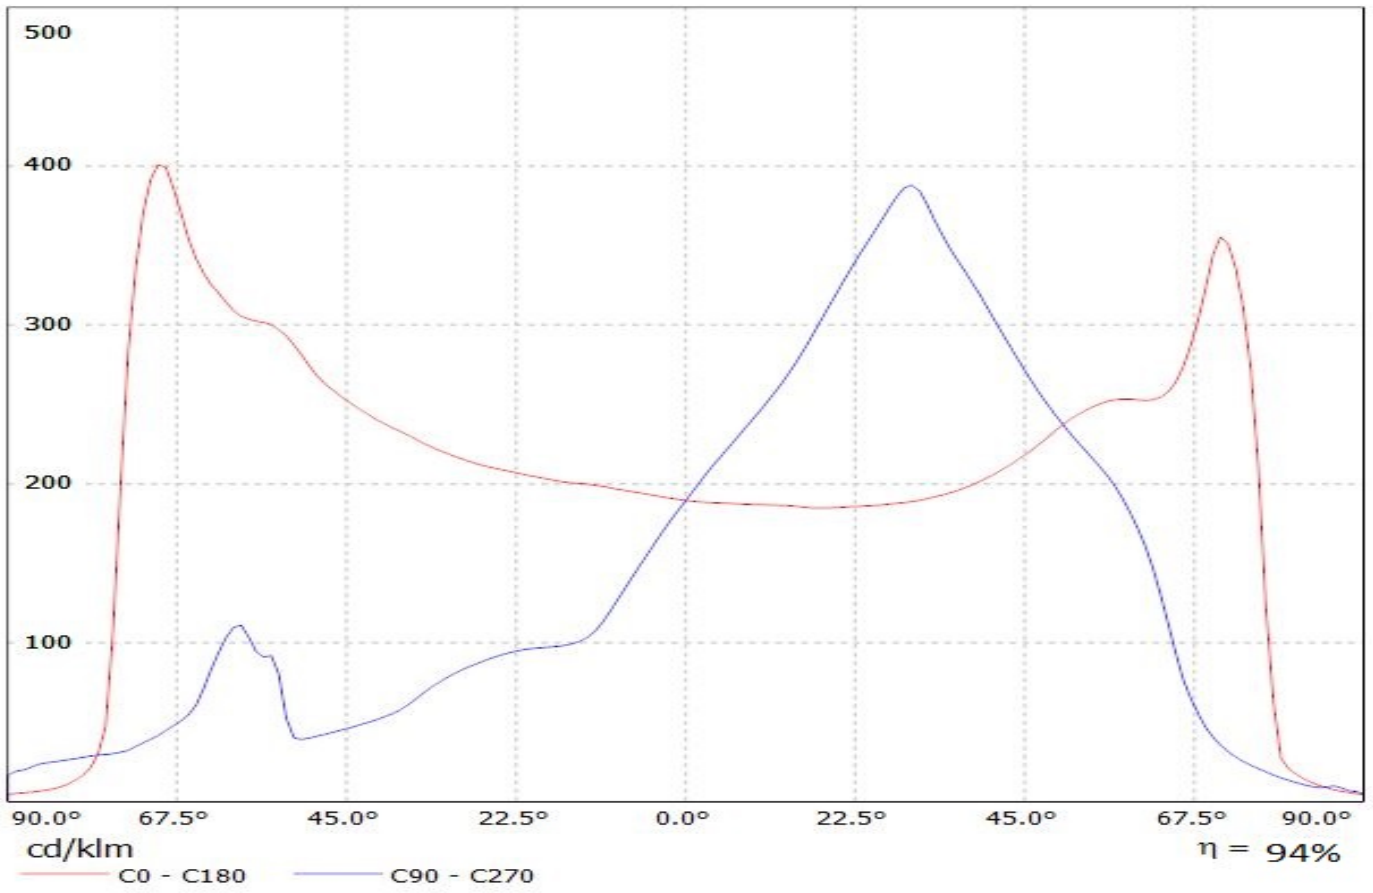


Luminaire: Ledil Oy C15035_STRADELLA-8-T3_NICHIA_NVSW219C_SIMULATED
Lamps: 1 x NICHIA NVSW219C

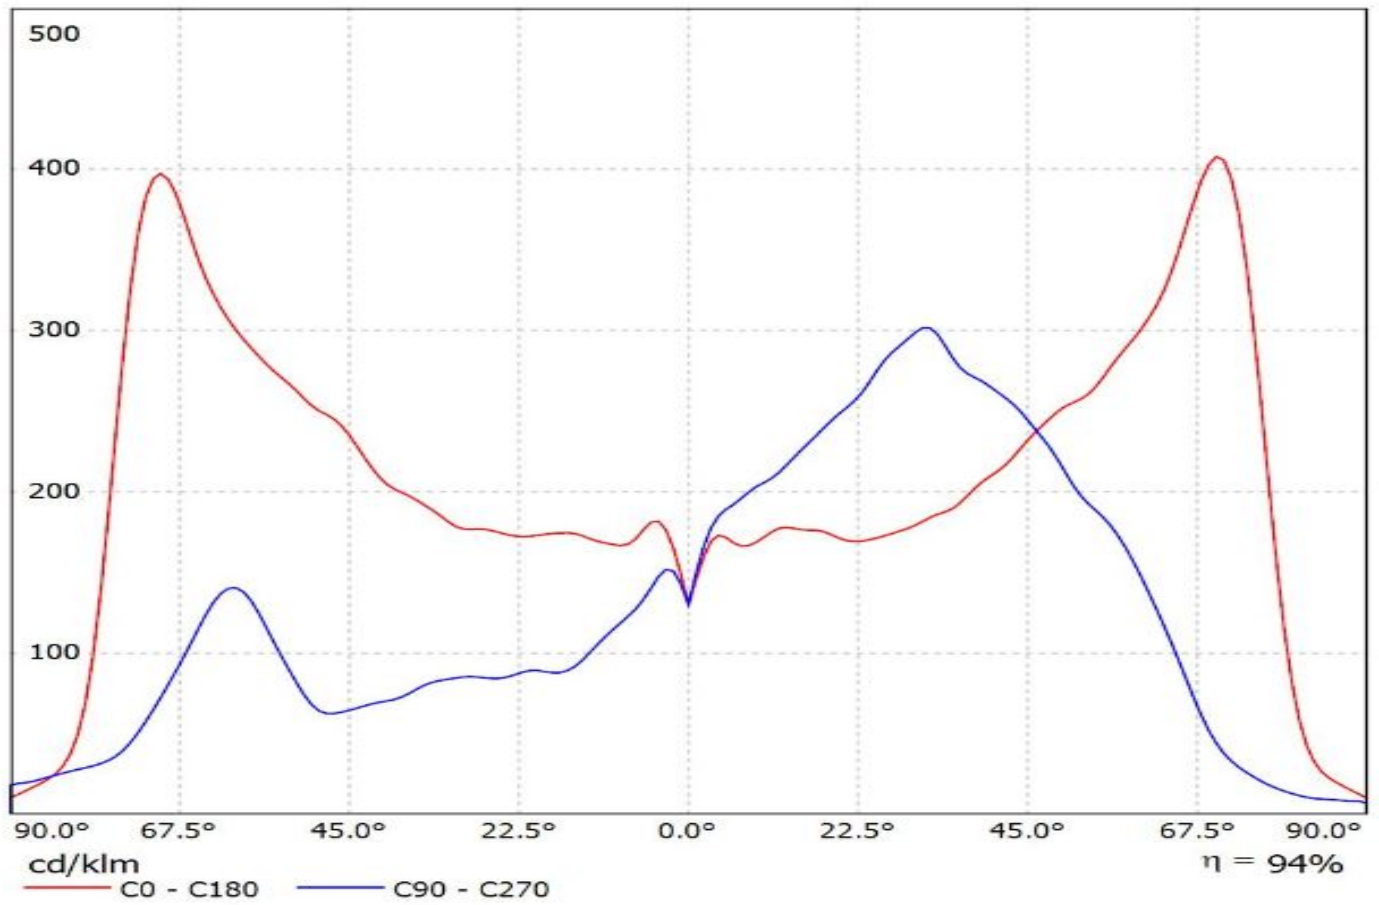

Luminaire: Ledil Oy C15035_STRADELLA-8-T3_(NCSxE17A)_SIMULATED
Lamps: 1 x NCSWE17A

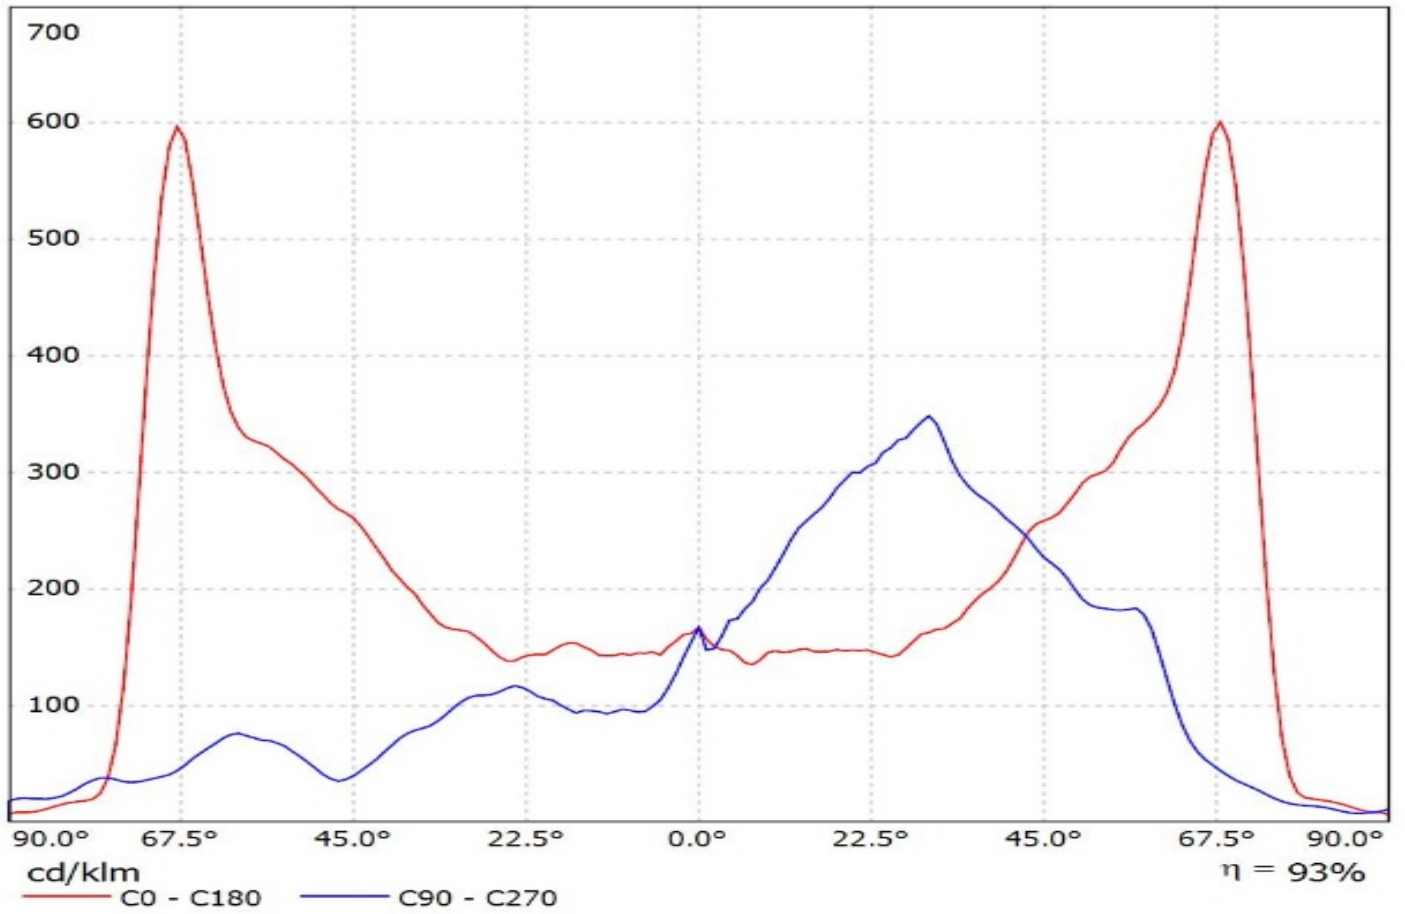


Luminaire: Ledil Oy C15035_STRADELLA-8-T3_NVSE21AT_SIMULATED
Lamps: 1 x NICHIA NVSE21AT

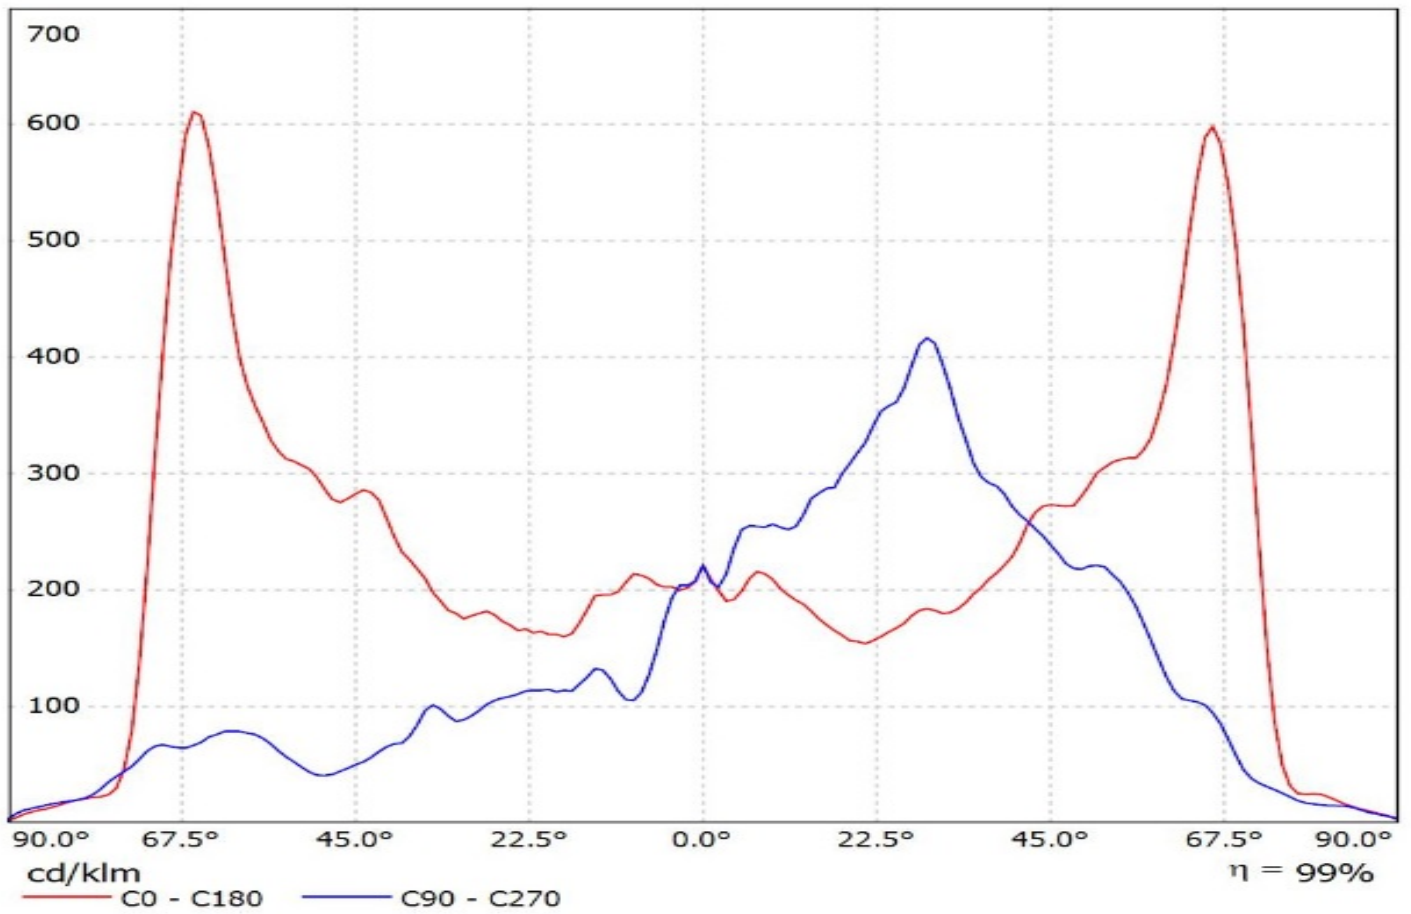


Luminaire: LEDiL Oy C15035_STRADELLA-8-T3_(SZ8-Y19)

Lamps: 1 x Seoul_SZ8-Y19_(SZ8-Y19-W0-C7)_940.325lm@250mA_P=5.59177W_I=0.250A

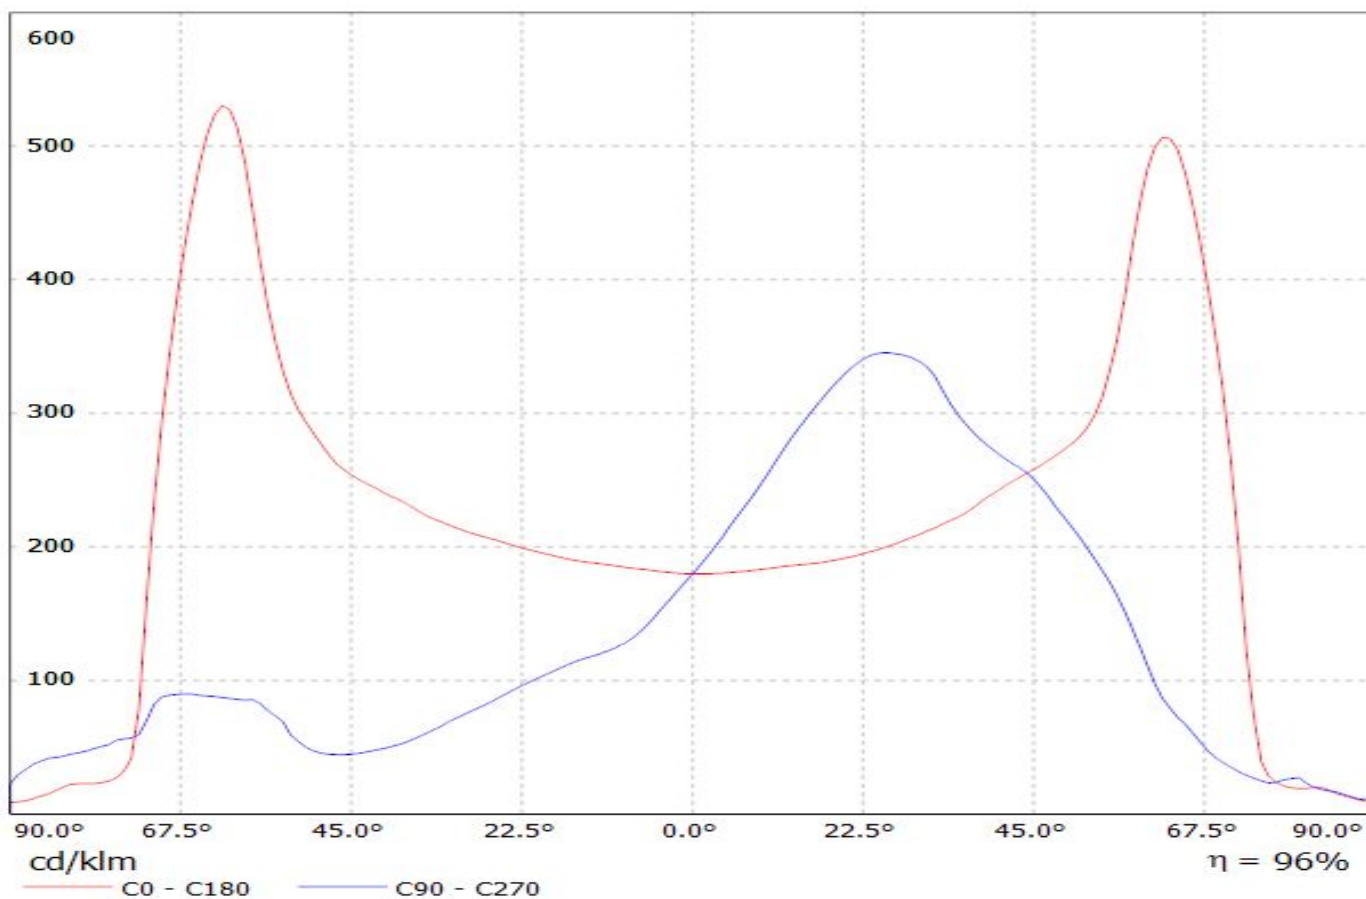


Luminaire: LEDiL Oy C15035_STRADELLA-8-T3_(SZ8_Y22)

Lamps: 1 x Seoul_SZ8_Y22_(SZ8-Y22-W0-C7)_1002.11lm@250mA_P=5.42341W_I=0.250A

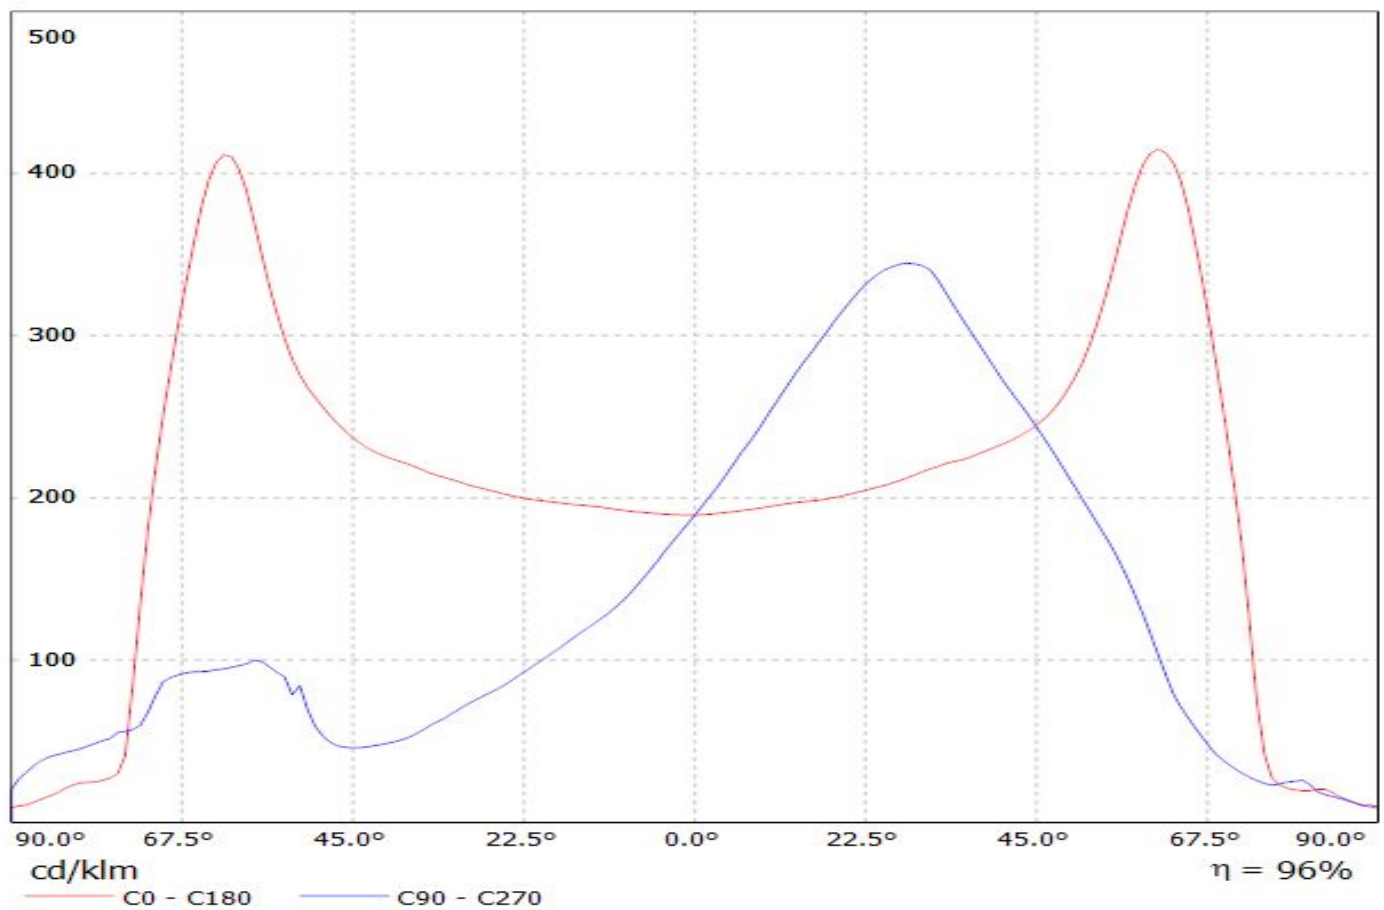


Luminaire: LEDiL Oy C15035_STRADELLA-8-T3 (Z8Y22P)

Lamps: 1 x Seoul_SZ8-Y22P_(SZ8-Y22-W0-C7-P)_957.081lm@250mA_P=5.49085W_I=0.25A

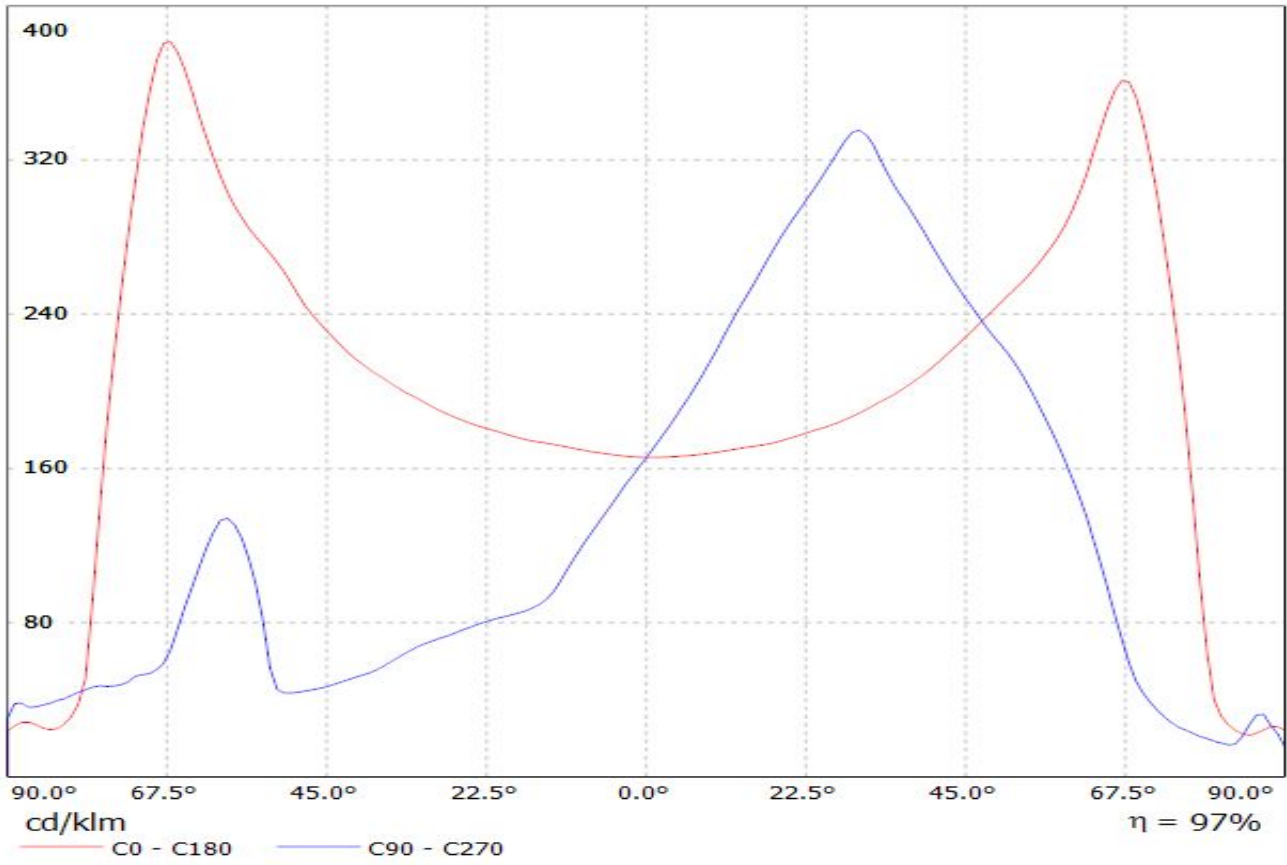

Luminaire: Ledil C15035_STRADELLA-8-T3_(XT-E)


Lamps: 1 x Cree_XT-E_x8_(XTEAWT-0-2A0-R30-FB0001)_801.566lm@250mA_P=5.9775W_I=0.25A

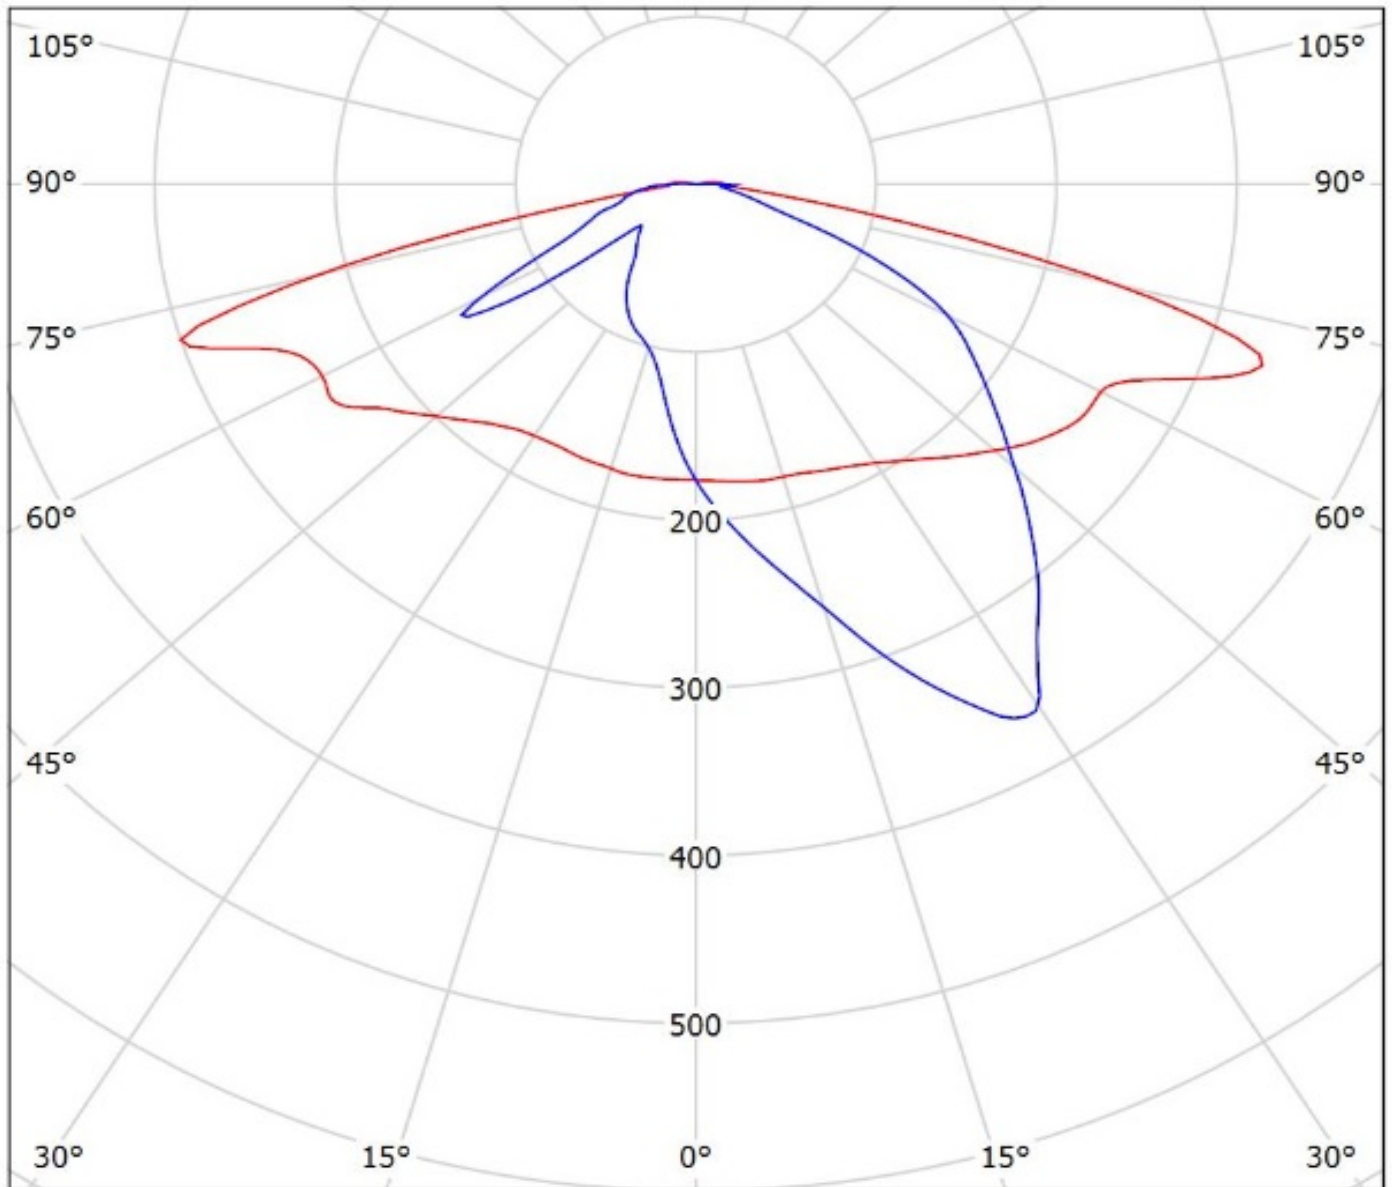

cd/klm

— C0 - C180 — C90 - C270


Luminaire: Ledil Oy C15035_STRADELLA-8-T3_(XP-G3)_SIMULATED
Lamps: 1 x Cree XP-G3

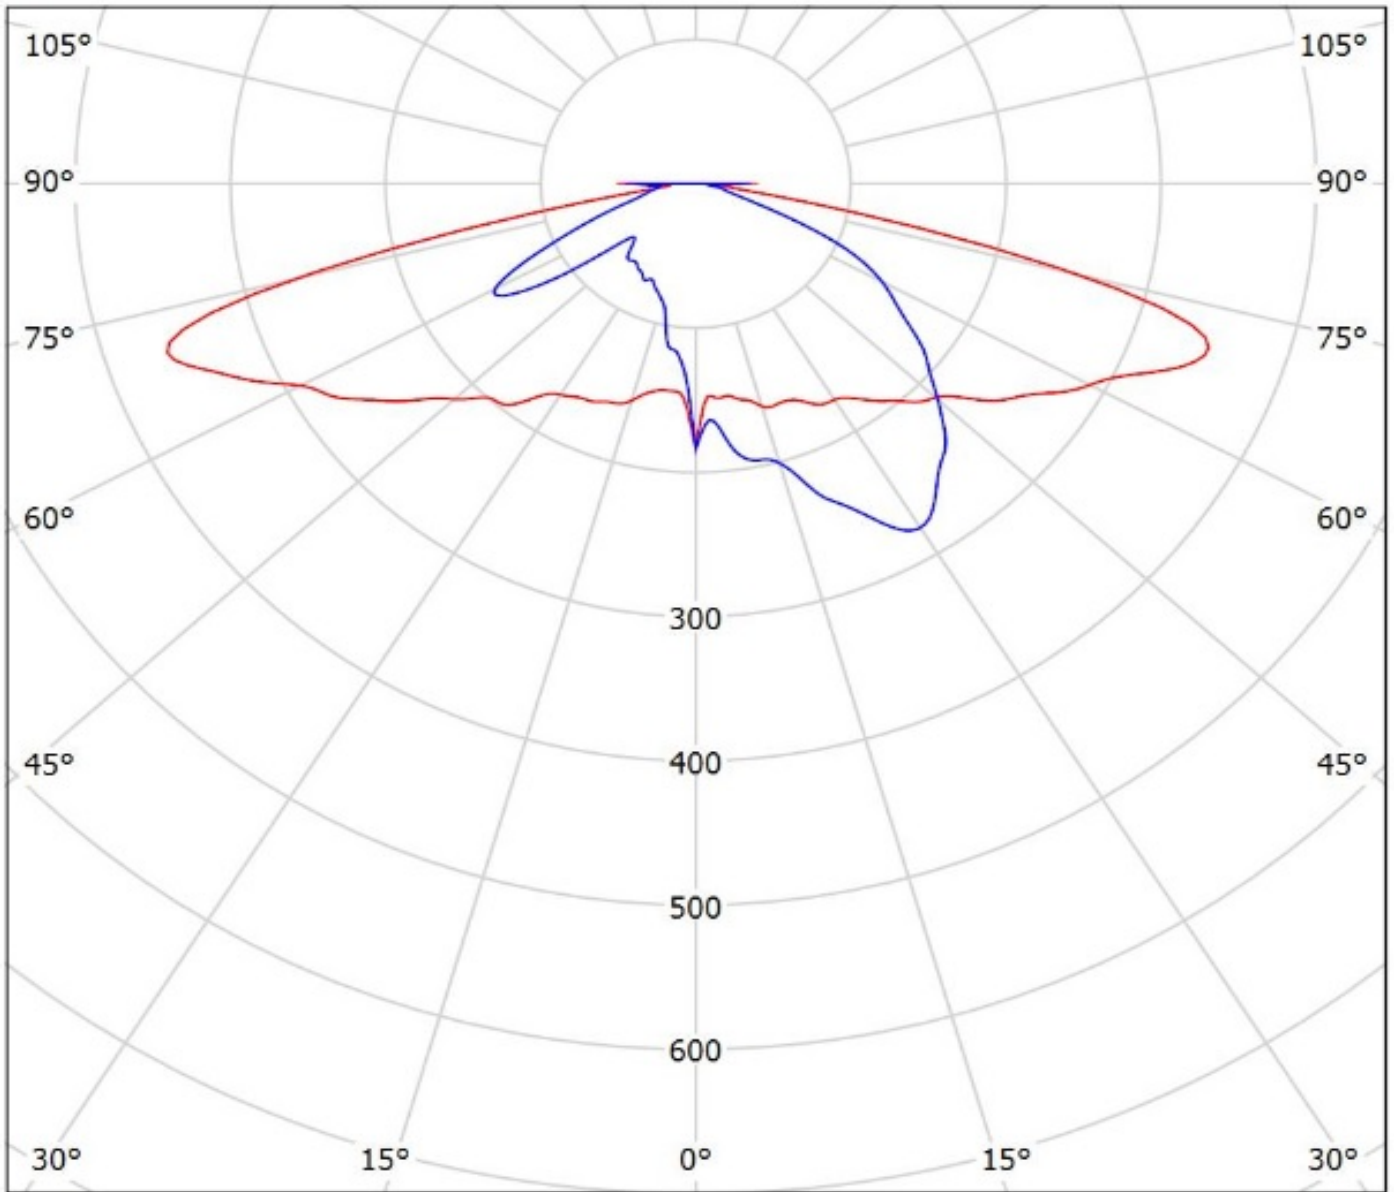

cd/klm
— C0 - C180 — C90 - C270

$\eta = 89\%$

Luminaire: LEDiL Oy C15035_STRADELLA-8-T3_(Luxeon_TX)
Lamps: 1 x Luxeon_TX_693.838lm@250mA_P=5.64523W_I=0.250A

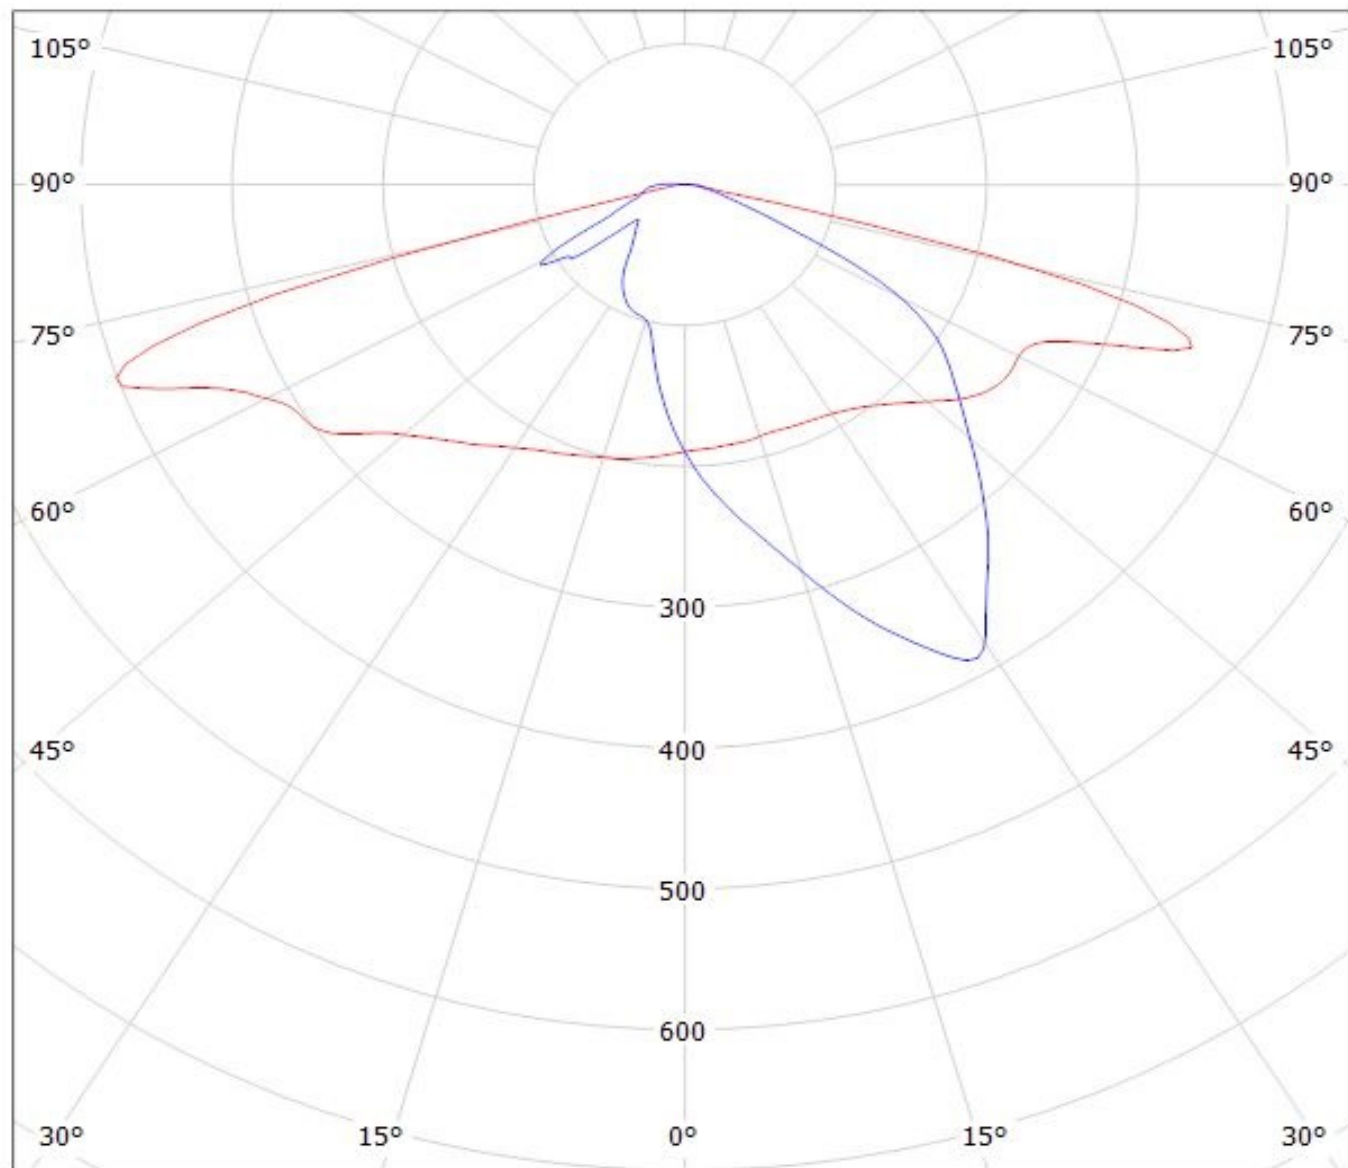


cd/klm

— C0 - C180 — C90 - C270

$\eta = 94\%$

Luminaire: Ledil Oy C15035_STRADELLA-8-T3_NICHIA_NVSW219C_SIMULATED
Lamps: 1 x NICHIA NVSW219C

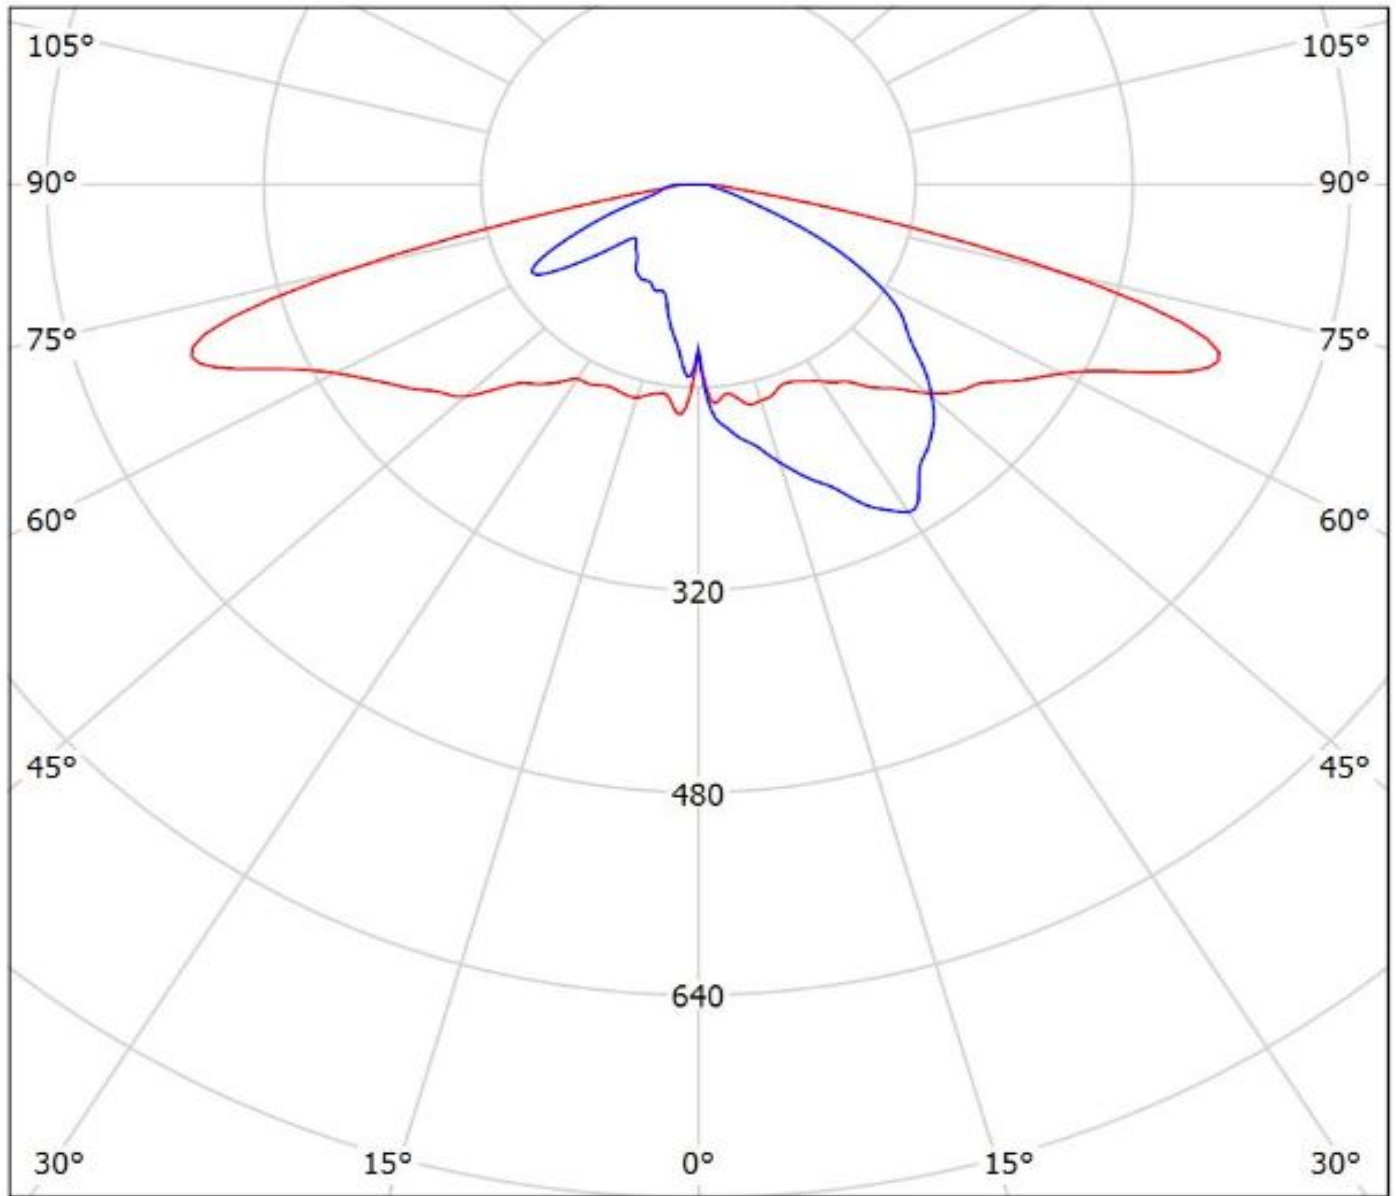


cd/klm

— C0 - C180 — C90 - C270

$\eta = 94\%$

Luminaire: Ledil Oy C15035_STRADELLA-8-T3_(NCSxE17A)_SIMULATED

Lamps: 1 x NCSWE17A

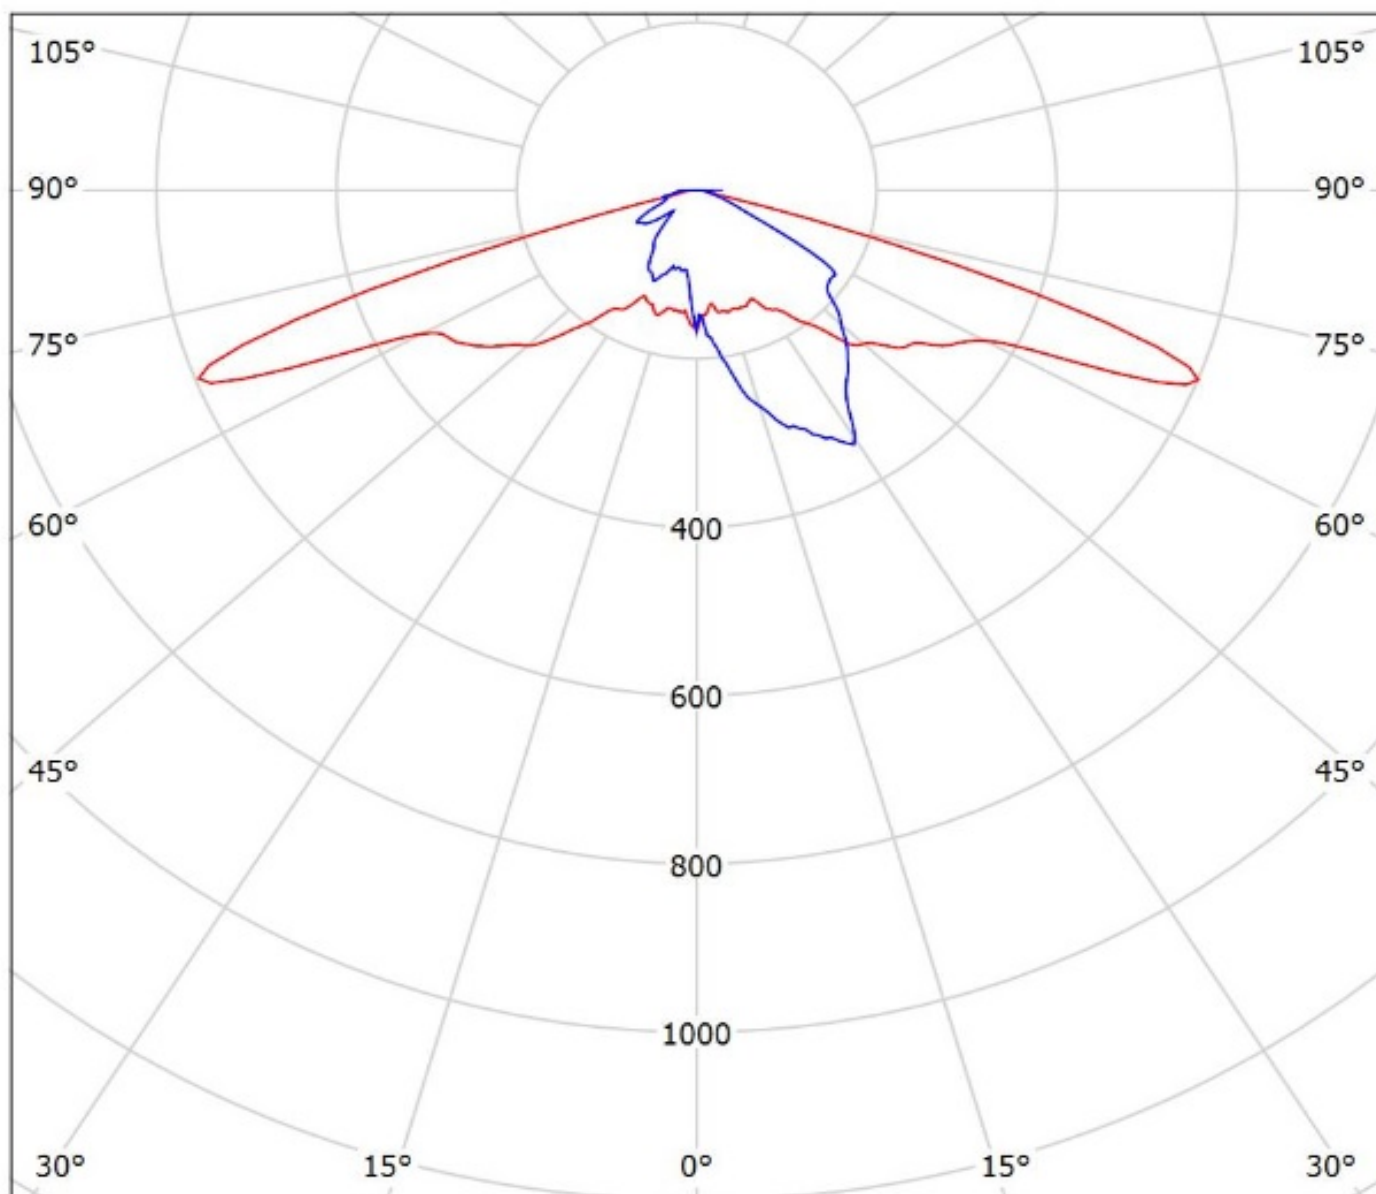


cd/klm

— C0 - C180 — C90 - C270

$\eta = 93\%$

Luminaire: Ledil Oy C15035_STRADELLA-8-T3_NVSE21AT_SIMULATED

Lamps: 1 x NICHIA NVSE21AT

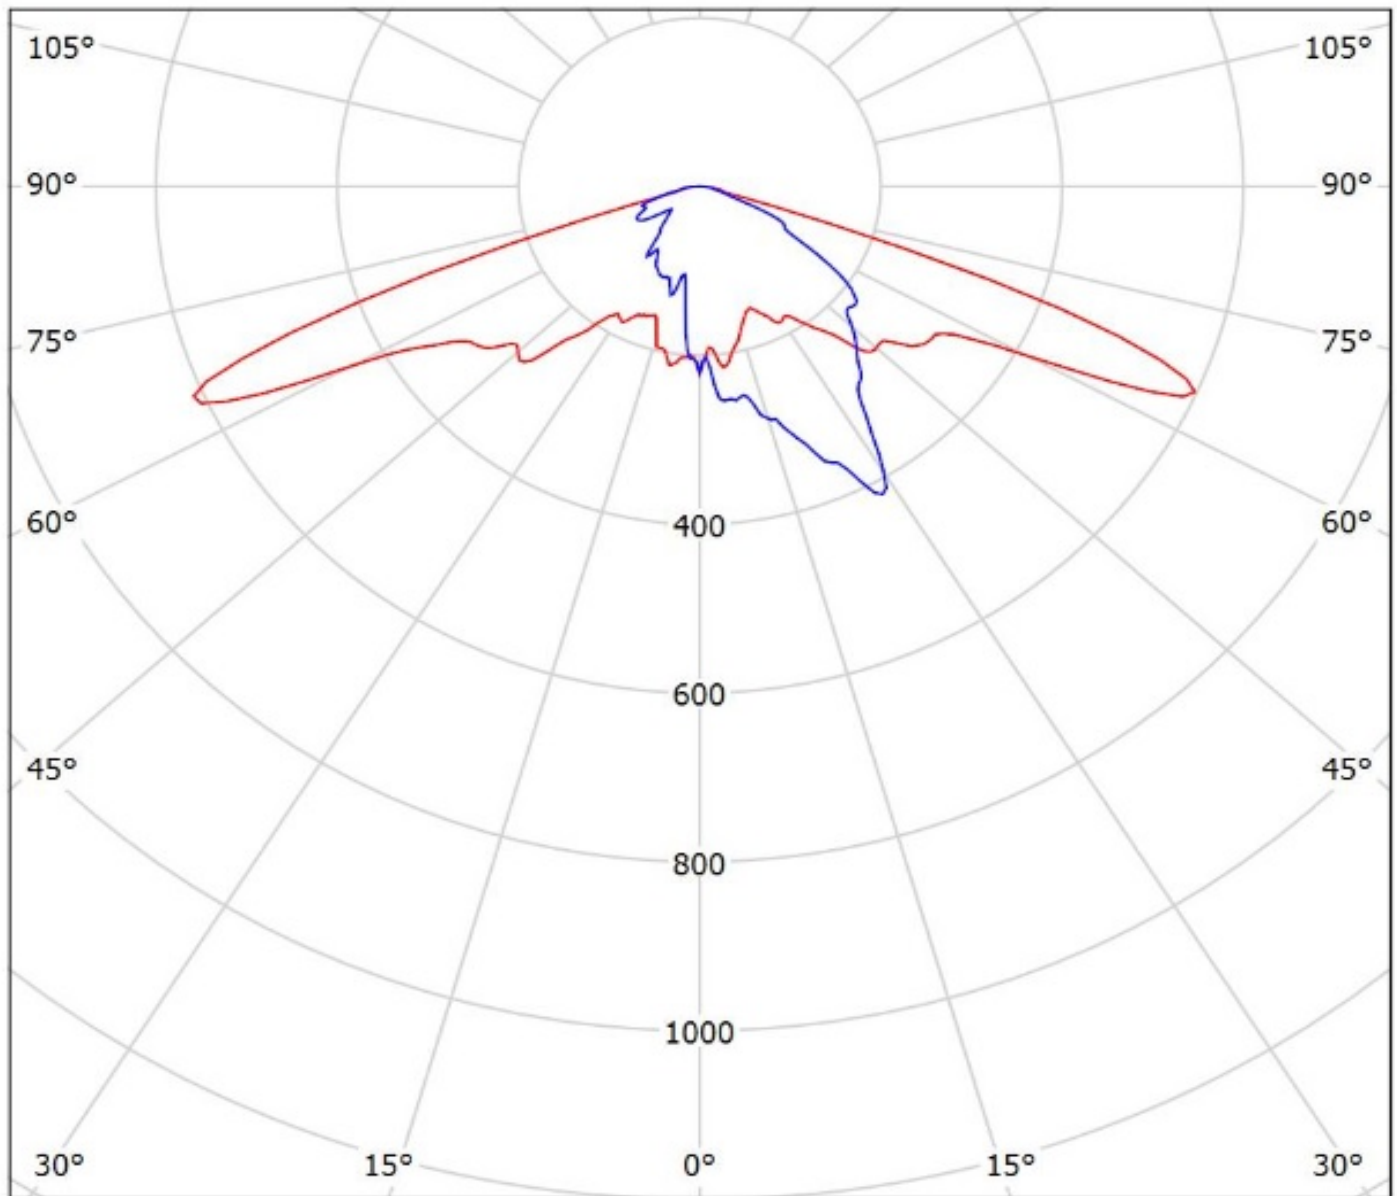


cd/klm

— C0 - C180 — C90 - C270

$\eta = 99\%$

Luminaire: LEDiL Oy C15035_STRADELLA-8-T3_(SZ8-Y19)

Lamps: 1 x Seoul_SZ8-Y19_(SZ8-Y19-W0-C7)_940.325lm@250mA_P=5.59177W_I=0.250A

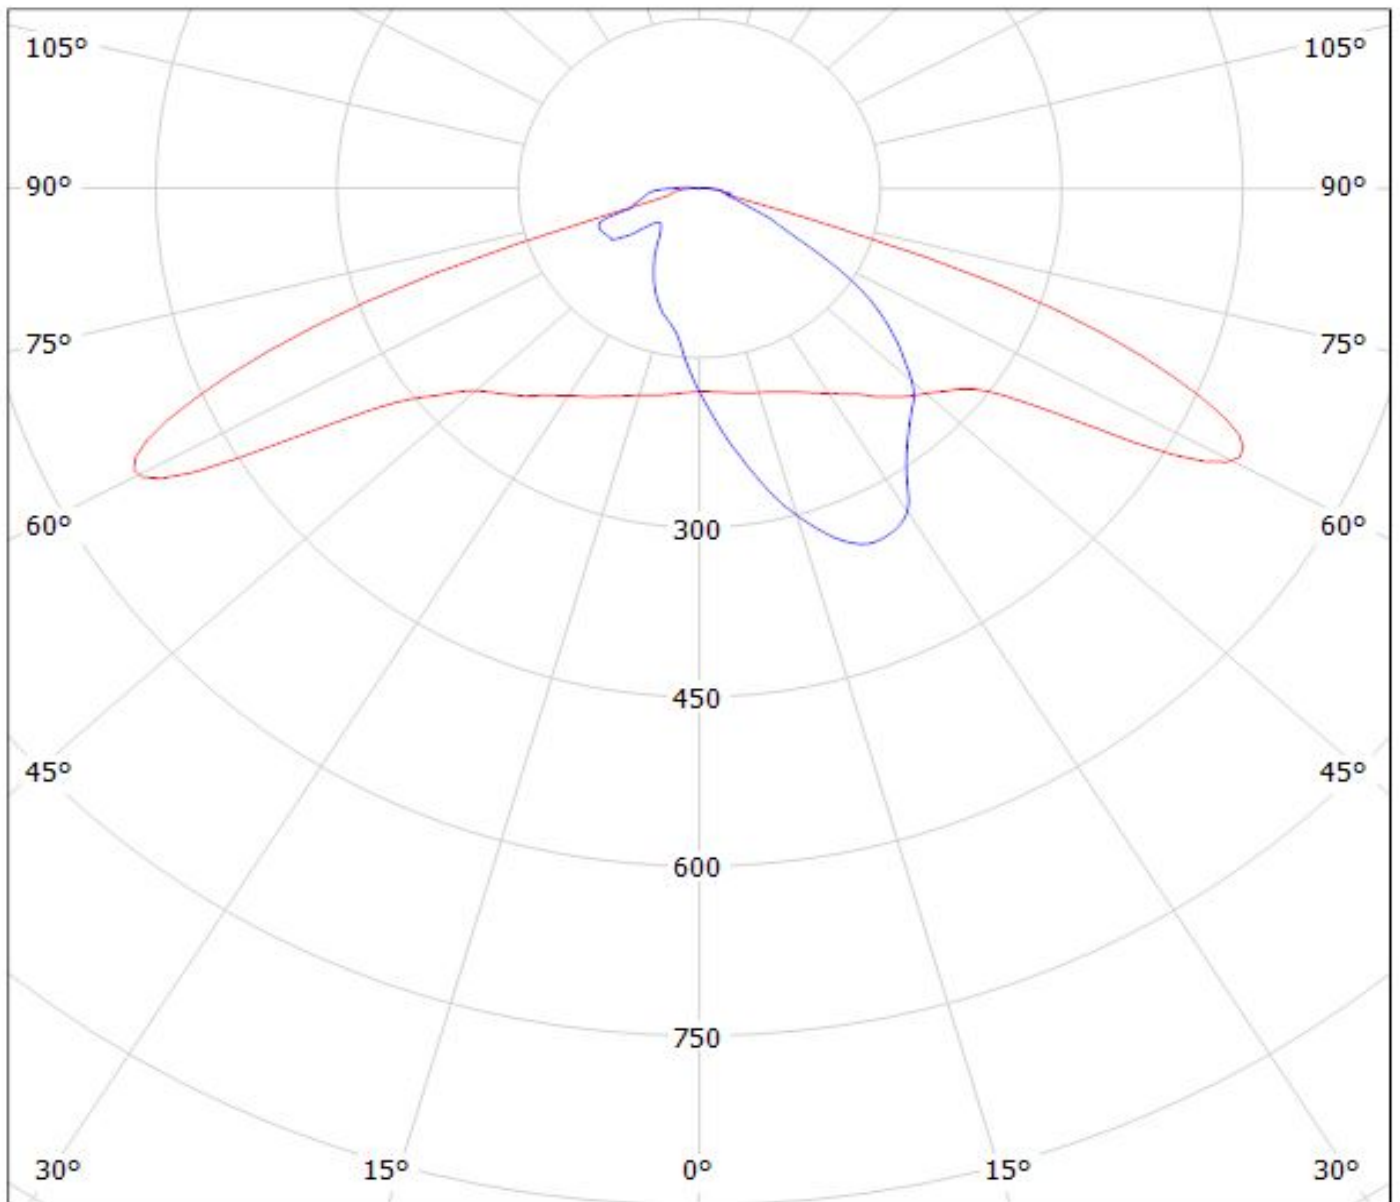


cd/klm

$\eta = 96\%$

— C0 - C180 — C90 - C270


Luminaire: LEDiL Oy C15035_STRADELLA-8-T3_(SZ8_Y22)

Lamps: 1 x Seoul_SZ8_Y22_(SZ8-Y22-W0-C7)_1002.11lm@250mA_P=5.42341W_I=0.250A

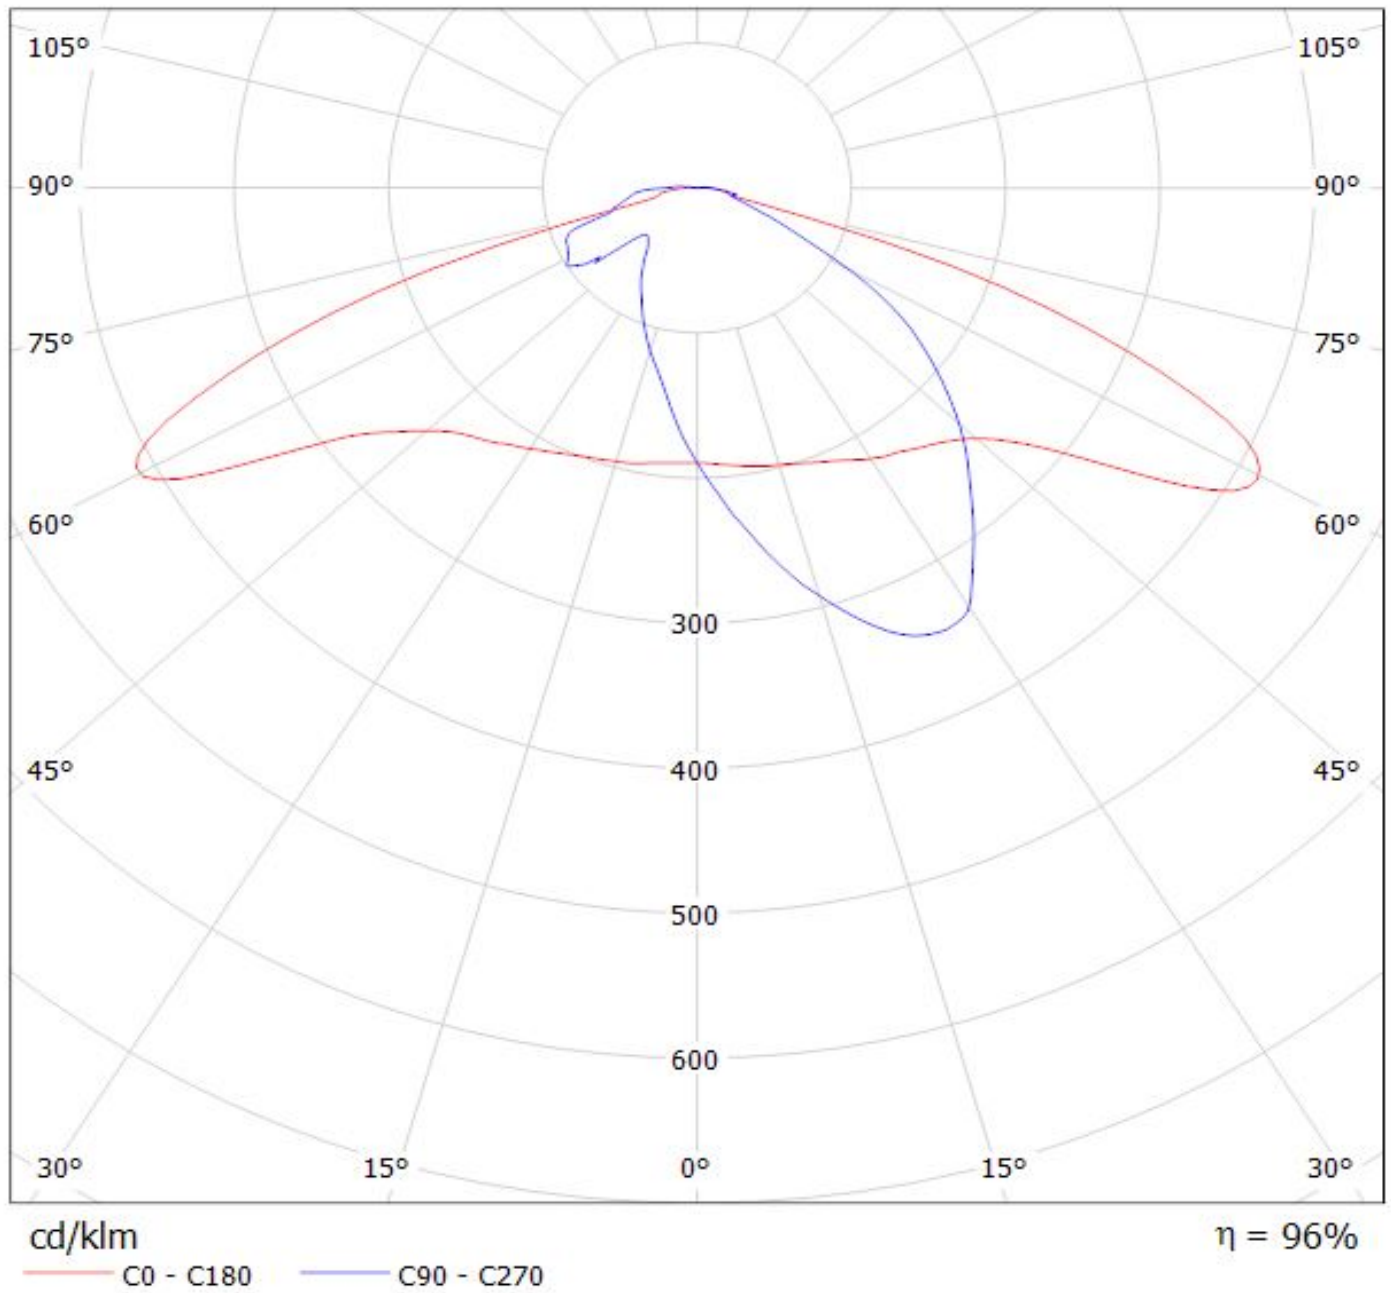

Luminaire: LEDiL Oy C15035_STRADELLA-8-T3_(Z8Y22P)

Lamps: 1 x Seoul_SZ8-Y22P_(SZ8-Y22-W0-C7-P)_957.081lm@250mA_P=5.49085W_I=0.25A

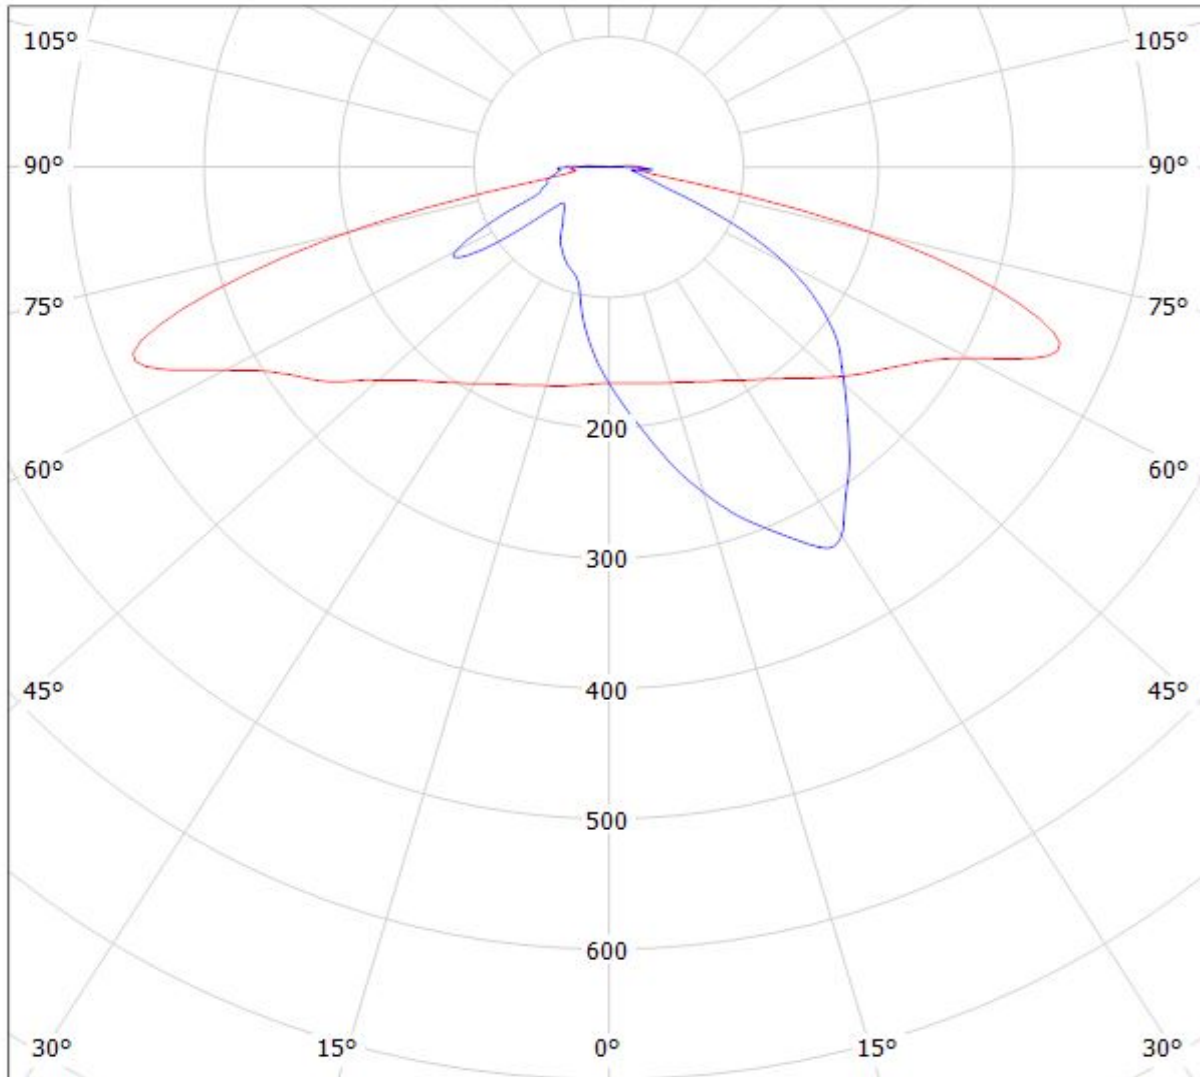

cd/klm

— C0 - C180

— C90 - C270

$\eta = 97\%$

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.