


FEMALE END VIEW




- 1=WH
- 2=BN
- 3=GN
- 4=YE
- 5=GY
- 6=BU
- PE=GN/PE

| HARTING P/N | Type of cable | Cable length(mm) |
|----------------|---------------|--------------------------------------|
| 21375200701050 | PUR | 5000 ⁺²⁰⁰ ₋₀ |
| 21375200701100 | PUR | 10000 ^{+4.00} ₋₀ |
| 21375200703050 | PVC | 5000 ⁺²⁰⁰ ₋₀ |
| 21375200703100 | PVC | 10000 ^{+4.00} ₋₀ |

SPECIFICATIONS

| | | |
|-----------------------------------|---------------|-----------|
| CONTACT CARRIER MATERIAL/COLOR | PA6/BLACK | |
| MOLDED HEAD MATERIAL/COLOR | TPU/BLACK | |
| CONTACTS | BRASS/GOLD | |
| COUPLING NUT MATERIAL/PLATING | BRASS/NICKEL | |
| O-RING MATERIAL | NBR | |
| RATED CURRENT | 8 A | |
| RATED VOLTAGE | 300 V | |
| OUTER CABLE JACKET MATERIAL/CLLOR | PUR/BLACK | PVC/BLACK |
| CONDUCTOR INSULATION MATERIAL | PP | |
| NUMBER OF CONDUCTORS (AWG) | 7X18AWG | |
| OPERATING TEMPERATURE | -20°C — +80°C | |
| PROTECTION CLASS | IEC IP67 | |

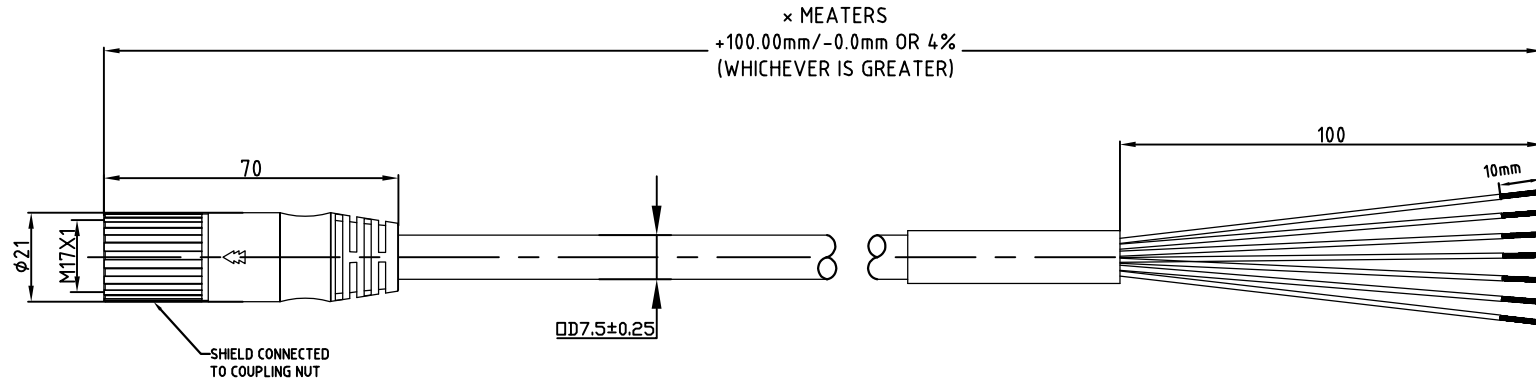

| | | | | | | | | |
|---|---|--|--------------------|-----------------------|-------------------------------|--------------------|---------------------------------|-------------|
| | All rights reserved Department HCS - CN | | Tech. Character. | | Free size tol. | | According to production drawing | |
| | HARTING Customised Solutions D-32339 Espelkamp | | Created by LINI | Inspected by LIANL | Standardisation LIANL | Date 2021-03-15 | State Final release | |
| Title M17 FE str molded 6+PE PUR/PVC open end, L=xxM | | | | | | | Doc-Key / ECM-Nr. / | |
| Rev. Description | | | Type TB | | Number 2137 52 00 7 0X XXX | | Rev. A | Page 1/1 |

| A | First issue. | Ivy Lin | 03/15/21 |
|------|--------------|---------|----------|
| Rev. | Description | Appr. | Date |
| | | | |