

ITEM	PART#	DESCRIPTION	QTY	UOM
A	50579403	SL Crp Hsg G SR Pos Ltch 3Ckt Opt G	1	PC
B	16020086	SL Fem Crimp Term 22-24 Tin Reel x	3	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X22AWG DISC MPPE BK UL11028	BLACK
A2	--	1X22AWG DISC MPPE BK UL11028	BLACK
A3	--	1X22AWG DISC MPPE BK UL11028	BLACK

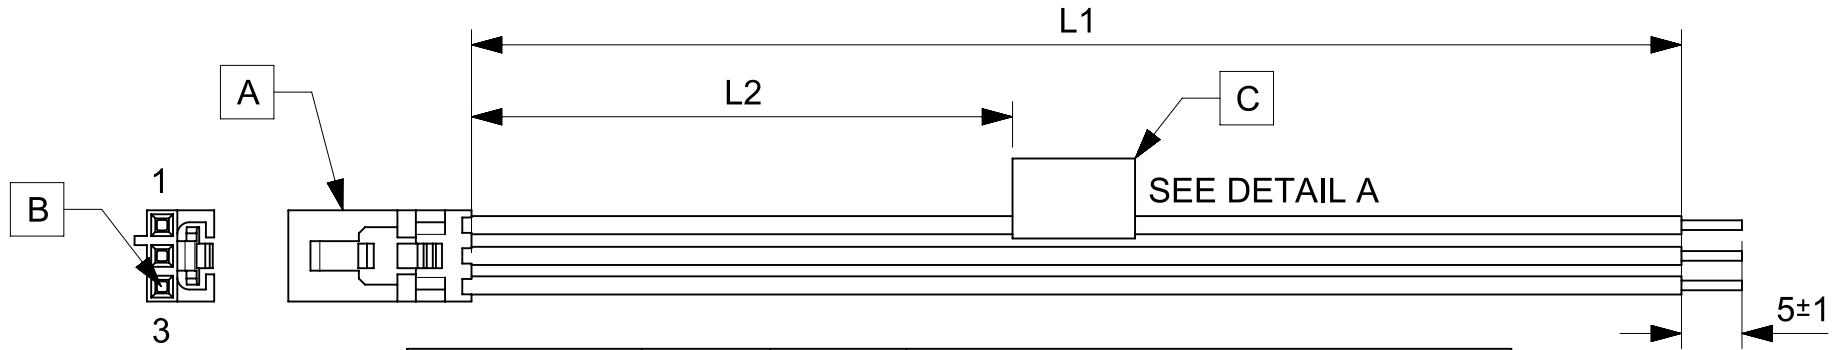


TABLE			
PART NUMBER	L1	L2	TITLE
2162711030	50±3	13 REF	SL POSITIVE LOCK R-S 3CKT 50MM Sn
2162711031	100±5	38 REF	SL POSITIVE LOCK R-S 3CKT 100MM Sn
2162711032	150±8	63 REF	SL POSITIVE LOCK R-S 3CKT 150MM Sn
2162711033	300±10	138 REF	SL POSITIVE LOCK R-S 3CKT 300MM Sn
2162711034	600±10	288 REF	SL POSITIVE LOCK R-S 3CKT 600MM Sn

- NOTES**
1. Connector view shown is from mating side.
  2. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 0.9mm Max.
  3. Label text must be 2mm max. in height with Arial font.
  4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N  
MOLEX  
BATCH WK/YR  
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/05/05	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{E}{A} = 0$ $\frac{E}{E} = 0$ $\frac{E}{P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:			
	DIMENSION UNITS	SCALE	GENERAL TOLERANCES (UNLESS SPECIFIED)			
	mm	NTS	ANGULAR TOL ± °			
	4 PLACES ±		3 PLACES ±			
3 PLACES ±		2 PLACES ±		EC NO: 642836	PRODUCT CUSTOMER DRAWING DOCUMENT NUMBER: 2162711030 DOC TYPE: PSD DOC PART: 000 REVISION: A	
2 PLACES ±		1 PLACE ±		DRWN: ARAJU 2020/05/05		
1 PLACE ±		0 PLACES ±		CHK'D: RDESAI01 2020/08/05		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		APPR: RDESAI01 2020/08/05		
		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
		A4-SIZE	216271	SEE TABLE	GENERAL MARKET	1 OF 1