


MATERIALS AND FINISHES

2.92 PLUG:
SEE SD-73252-011

CABLE:
TEMP-FLEX AIR CORE 086-2201

LABEL:
BRADY PERMASLEEVE

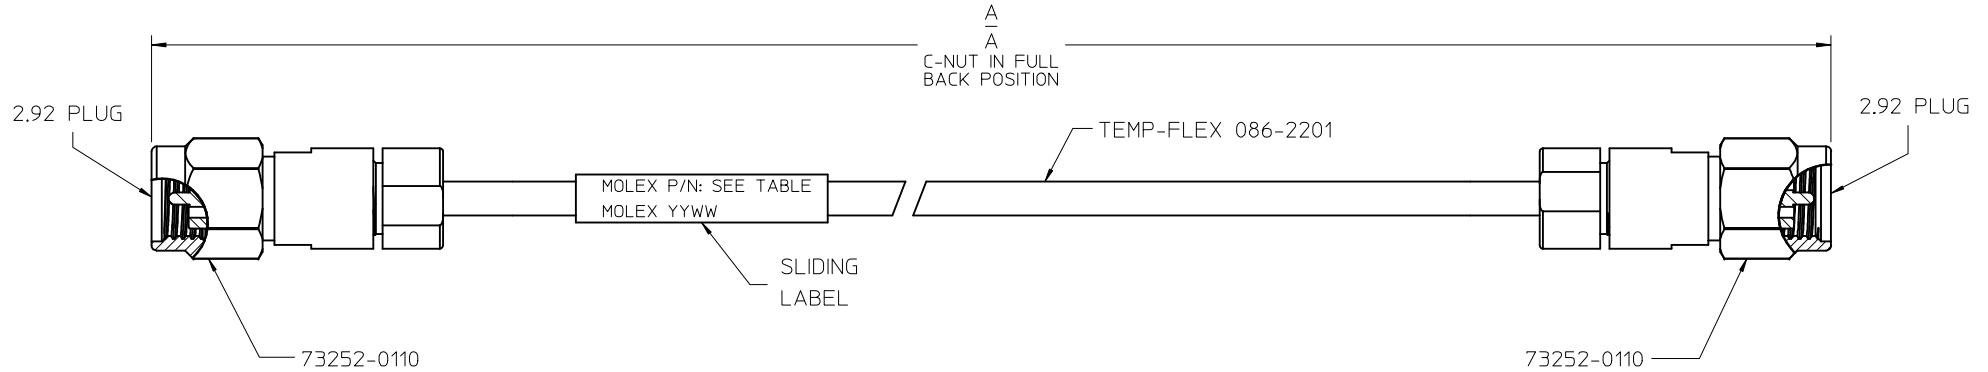

89762-1325	120.0	3048	16.0
89762-1324	18.00	457.2	2.40
89762-1323	15.00	381.0	2.00
89762-1322	12.00	304.8	1.60
89762-1321	9.00	228.6	1.20
89762-1320	6.00	152.4	0.90
PART NO.	IN	MM	INSERTION LOSS MAX TO 40 GHz (dB)
A			

VSWR 1.40 MAX TO 40 GHz

MIL-STD-348B, FIG. 323.1		INTERFACE	
SPECIFICATION		DESCRIPTION	
DIMENSION STYLE MM/IN		SCALE INCH	DESIGN UNITS INCH
DRAWN BY AROBERTSON		DATE 2013/03/20	TITLE 2.92 PLUG ST X2 ON TEMP-FLEX 086-2201 CABLE CA-292/292, EWR-4902
CHECKED BY SSS		DATE 2013/03/20	molex
APPROVED BY JWIENER		DATE 2013/03/27	
MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-89762-132	
SHEET NO. 1 OF 1			
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

CHG: UPDATE INSERTION LOSS AND MIL-STD SPECS	EC NO: URF2016-0037	2015/07/21
DRW: BOMALLEY	2015/07/21	
CHK: LLM	2015/07/21	
APP: AROBERTSON	2015/07/22	
REV	DESCRIPTION	
A2		

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)
▽=0	4 PLACES ± --- ± ---
▽=0	3 PLACES ± --- ± ---
▽=0	2 PLACES ± --- ± ---
	1 PLACE ± --- ± ---
	0 PLACE ± --- ± ---
	ANGULAR ± 2 °
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS