
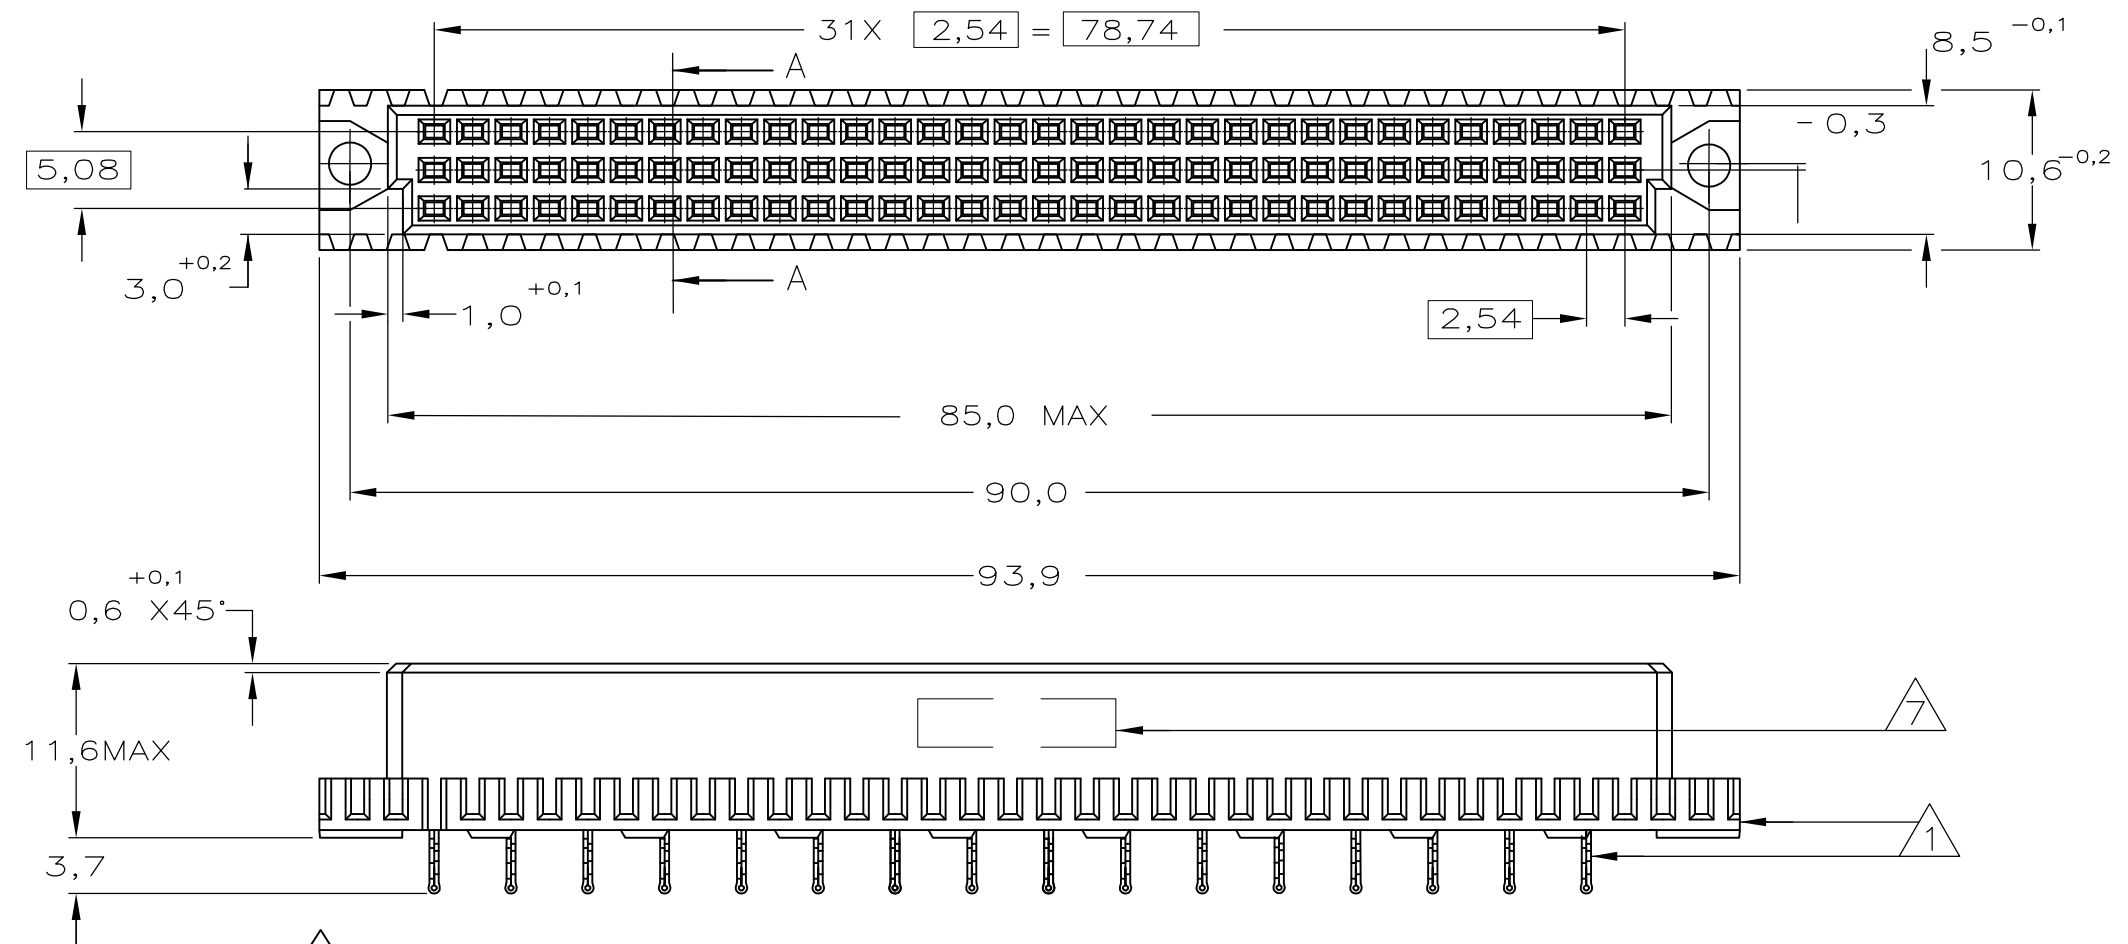


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
H	-	C	H-8071	1 JUN'91	LvdH RvL
		D	EH-1253-96	10 NOV'97	LvdH J.G.
		D1	ECR-10-021611	17NOV11	RK MKO

P.C.B. HOLE DIM.	ACTION PIN
DRILLED HOLE :1,15 ±0,025 mm	
FIN. HOLE :0,94 to 1,09 mm	
AFTER REFLOW :0,91 to 1,09 mm	
Cu-thks :0,025 to 0,075 mm	
SnPb-thks :0,004 to 0,010 mm	

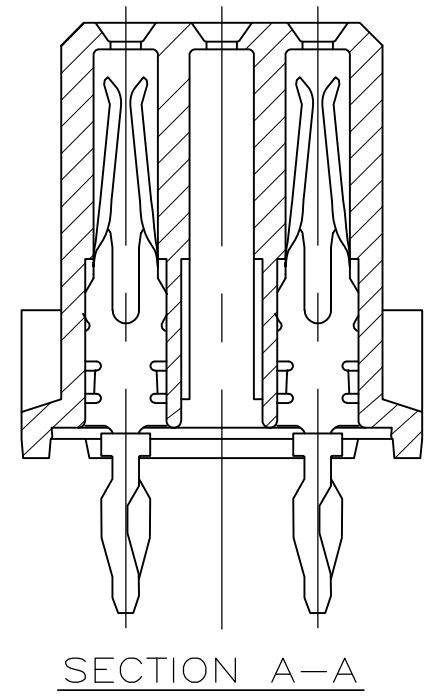

NOTES:

- 1 CONNECTOR MEETS THE REQUIREMENTS ACC. DIN 41612 ,PART 5.
- 2 MATERIAL CONTACT: PHOSPHORBRONZE. MATERIAL HOUSING: GLASSFILLED THERM. POLYESTER. COLOR:GREY
- 3 AT CONTACTAREA 1,25 μm GOLD OVER 1,25 μm NICKEL AT ACTION PIN AREA 1,25 μm TIN-LEAD (93/7).
- 4 AT CONTACTAREA 0,8 μm GOLD OVER 1,25 μm NICKEL . AT ACTION PIN AREA 1,25 μm TIN-LEAD (93/7).
- 5 CONTACT ARRANGEMENTS; AN ASTERISK "X" DENOTES A CONTACT.
- 6 AT CONTACTAREA 0,4 μm GOLD OVER 1,25 μm NICKEL . AT ACTION PIN AREA 1,25 μm TIN LEAD (93/7).
- 7 CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE ON OUTSIDE OF MATING AREA AT SIDE OF ROW c.
- 8 FOR P.C.BOARDS 1,6mm OR THICKER

c	b	a	5
0	0	0	1
X	0	X	2
0	0	0	3
X	0	X	4
0	0	0	5
X	0	X	6
0	0	0	7
X	0	X	8
0	0	0	9
X	0	X	10
0	0	0	11
X	0	X	12
0	0	0	13
X	0	X	14
0	0	0	15
X	0	X	16
0	0	0	17
X	0	X	18
0	0	0	19
X	0	X	20
0	0	0	21
X	0	X	22
0	0	0	23
X	0	X	24
0	0	0	25
X	0	X	26
0	0	0	27
X	0	X	28
0	0	0	29
X	0	X	30
0	0	0	31
X	0	X	32

OBSOLETE	6	2	216088-8
SUPERSEDED BY 1551870-1	4	2	216088-4
OBSOLETE	3	2	216088-1
	FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.MEEUWSEN 01 MAR'89	TE Connectivity	
DIMENSIONS: mm		CHK J.GIBBELS		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD -	NAME	
0 PLC ± -		PRODUCT SPEC -	32 POS. C FEMALE B.T.B. CONN. ACC. DIN 41612 WITH ACTION-PIN 8	
1 PLC ± -		APPLICATION SPEC -	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
2 PLC ± -		WEIGHT -	A3 00779 C-216088	
3 PLC ± -		CUSTOMER DRAWING	SCALE NTS SHEET 1 OF 1 REV D1	
4 PLC ± -				
ANGLES ± -				
FINISH -				