

TABLE 1						
STYLE	TAIL/OPTION	"A"	"B"	TERMINAL #1	TERMINAL #2	TERMINAL #3
-01	-RA	.103 [2.62]	.126 [3.20]	T-1S13-02-XX-2	T-1S13-03-XX-2	T-1S13-17-XX-2
-01	-FC	.139 [3.53]	.126 [3.20]	T-1S13-19-XX-2	T-1S13-22-XX-2	N/A
-01	RA W/END SHROUD	.139 [3.53]	.126 [3.20]	T-1S13-19-XX-2	T-1S13-22-XX-2	N/A
-01	*-FE	.287 [7.29]	.126 [3.20]	T-1S13-22-XX-2	T-1S13-28-XX-2	N/A
-04	-RA	.100 [2.54]	.075 [1.91]	T-1S13-20-XX-2	T-1S13-08-XX-2	N/A
-04	-FC	.150 [3.81]	.075 [1.91]	T-1S13-02-XX-2	T-1S13-03-XX-2	N/A
-04	RA W/END SHROUD	.150 [3.81]	.075 [1.91]	T-1S13-02-XX-2	T-1S13-03-XX-2	N/A
-05	-RA	.090 [2.29]	.065 [1.65]	T-1S13-07-XX-2	T-1S13-13-XX-2	N/A
-05	-FC	.160 [4.06]	.065 [1.65]	T-1S13-02-XX-2	T-1S13-03-XX-2	N/A
-05	RA W/END SHROUD	.160 [4.06]	.065 [1.65]	T-1S13-02-XX-2	T-1S13-03-XX-2	N/A

UNLESS OTHERWISE NOTED TOLERANCES ARE:

ONE PLACE DECIMALS ±.1[2.5] THREE PLACE DECIMALS ±.005[.13] ANGLES ±2°

TWO PLACE DECIMALS ±.01[.3] FOUR PLACE DECIMALS ±.0020[.051]

TITLE: 2mm x 2mm RA TERMINAL STRIP ASSEMBLY

DWG NO: TMMH-1XX-XX-XX-X-XX-XX-XXX

SHEET 1 OF 2

PLOT SCALE: 1 = .140/ DIMSCALE: 1 = .100

TMMH-1XX-XX-XX-X-XX-XX-XXX

No. OF POSITIONS  
-02 THRU -50  
(PER ROW)

LEAD STYLE  
-01: .126 [3.20]  
-04: .075 [1.91]  
-05: .065 [1.65] MIN  
(SEE TABLE 1)

POLARIZATION  
SPECIFY POS -XXX TO BE OMITTED

SHROUD OPTION: (AVAILABLE ON -D ROW OPTION ONLY)  
-ES: END SHROUDS (SEE FIG. 2- SHT 2, 9 POS MIN)  
(NOT AVAILABLE WITH -FC TAIL OPTION)  
-EP: GUIDE POST (SEE FIG. 4- SHT 2, 9 POS MIN)  
(NOT AVAILABLE WITH -FC TAIL OPTION)  
-EL: BOARD LOCK (SEE FIG. 3- SHT 2, 9 POS MIN)  
(NOT AVAILABLE WITH -FC TAIL OPTION)

TAIL OPTION  
-RA: RIGHT ANGLE  
-FC: FLEX CARD (RIGHT ANGLE; -D ROW OPTION ONLY)  
-FE: ELEVATED FLEX CARD (RIGHT ANGLE; -D ROW OPTION ONLY)

ROW OPTION  
-D: DOUBLE  
(USE TMMH-XX-D-X)  
-T: TRIPLE  
(USE TMMH-XX-T-X)  
(AVAILABLE WITH -01 LEAD STYLE ONLY)

\* = TAIL OPTION TO BE USED ON RIGHT ANGLE ONLY

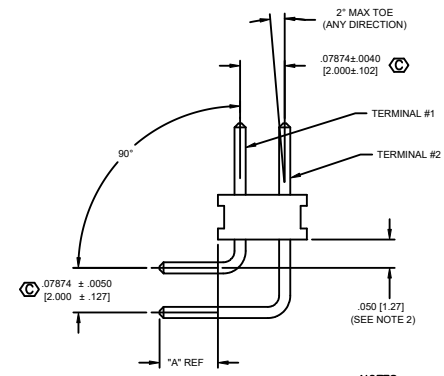
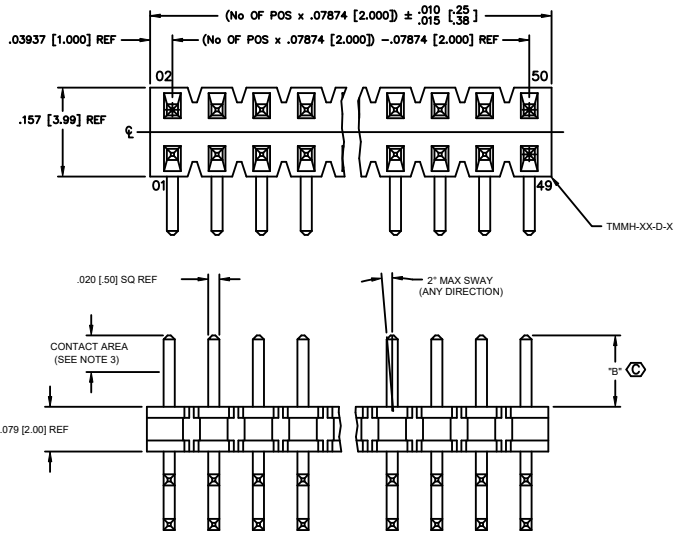



FIG 1

- NOTES:
- PARTS MAY BE CUT TO POSITION.
  - MEASURED AT BEND RADIUS; NOT AT END OF PIN.
  - GOLD PLATING TO BE ON POST; TIN PLATING ON TAIL.
  - ⊙ REPRESENTS A CRITICAL DIMENSION.
  - MINIMUM PUSHOUT FORCE: 1.0 LB.
  - NOTE DELETED.
  - MAX CUT FLASH TO BE .020.

PACKAGING VIEW

\* ONLY TUBE POSITIONS -05 THROUGH -50

SCALE: .5x

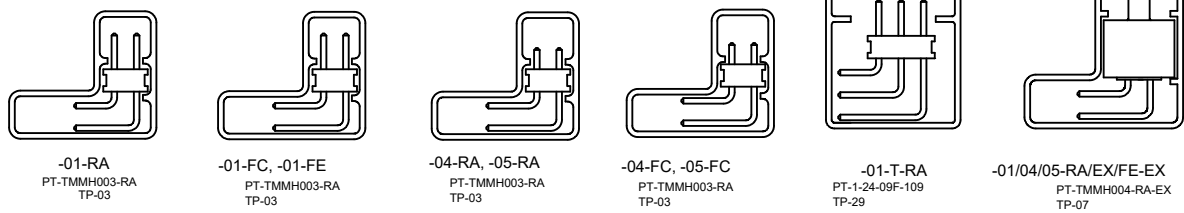

PROPRIETARY INFO  
THIS DOCUMENT CONTAINS INFORMATION OF SAMTEC, INC. AND IS THE PROPERTY OF SAMTEC, INC. IT IS TO BE KEPT CONFIDENTIAL AND NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. SAMTEC, INC. ACCEPTS NO LIABILITY FOR ANY DAMAGE TO PERSONS OR PROPERTY ARISING FROM THE USE OF THIS DOCUMENT.

samtec

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150  
PHONE (812) 944-6733 P.O. BOX 1147  
CODE 55322