

NOTES:

1.0 SPECIFICATIONS:


- 1.1 FREQUENCY RANGE: DC to 18 GHz
- 1.2 IMPEDANCE: 50 OHMS
- 1.3 VSWR: (MAX.) 1.30:1
- 1.4 INPUT POWER: 5 WATTS AVG.
5 KILOWATTS PEAK (5 MICROSECOND PULSE WIDTH) AT +25°C DERATED LINEARLY TO 1 WATT AT +125°C.
- 1.5 OPERATING TEMP. RANGE:
-55° to +125°C

2.0 MARKING:

2.1 MARK UNIT AS SHOWN
(REF.: INK-02611-27-30)

3.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

MODEL NUMBER
TRM-2142-MC-TNC-07
REV.
-1

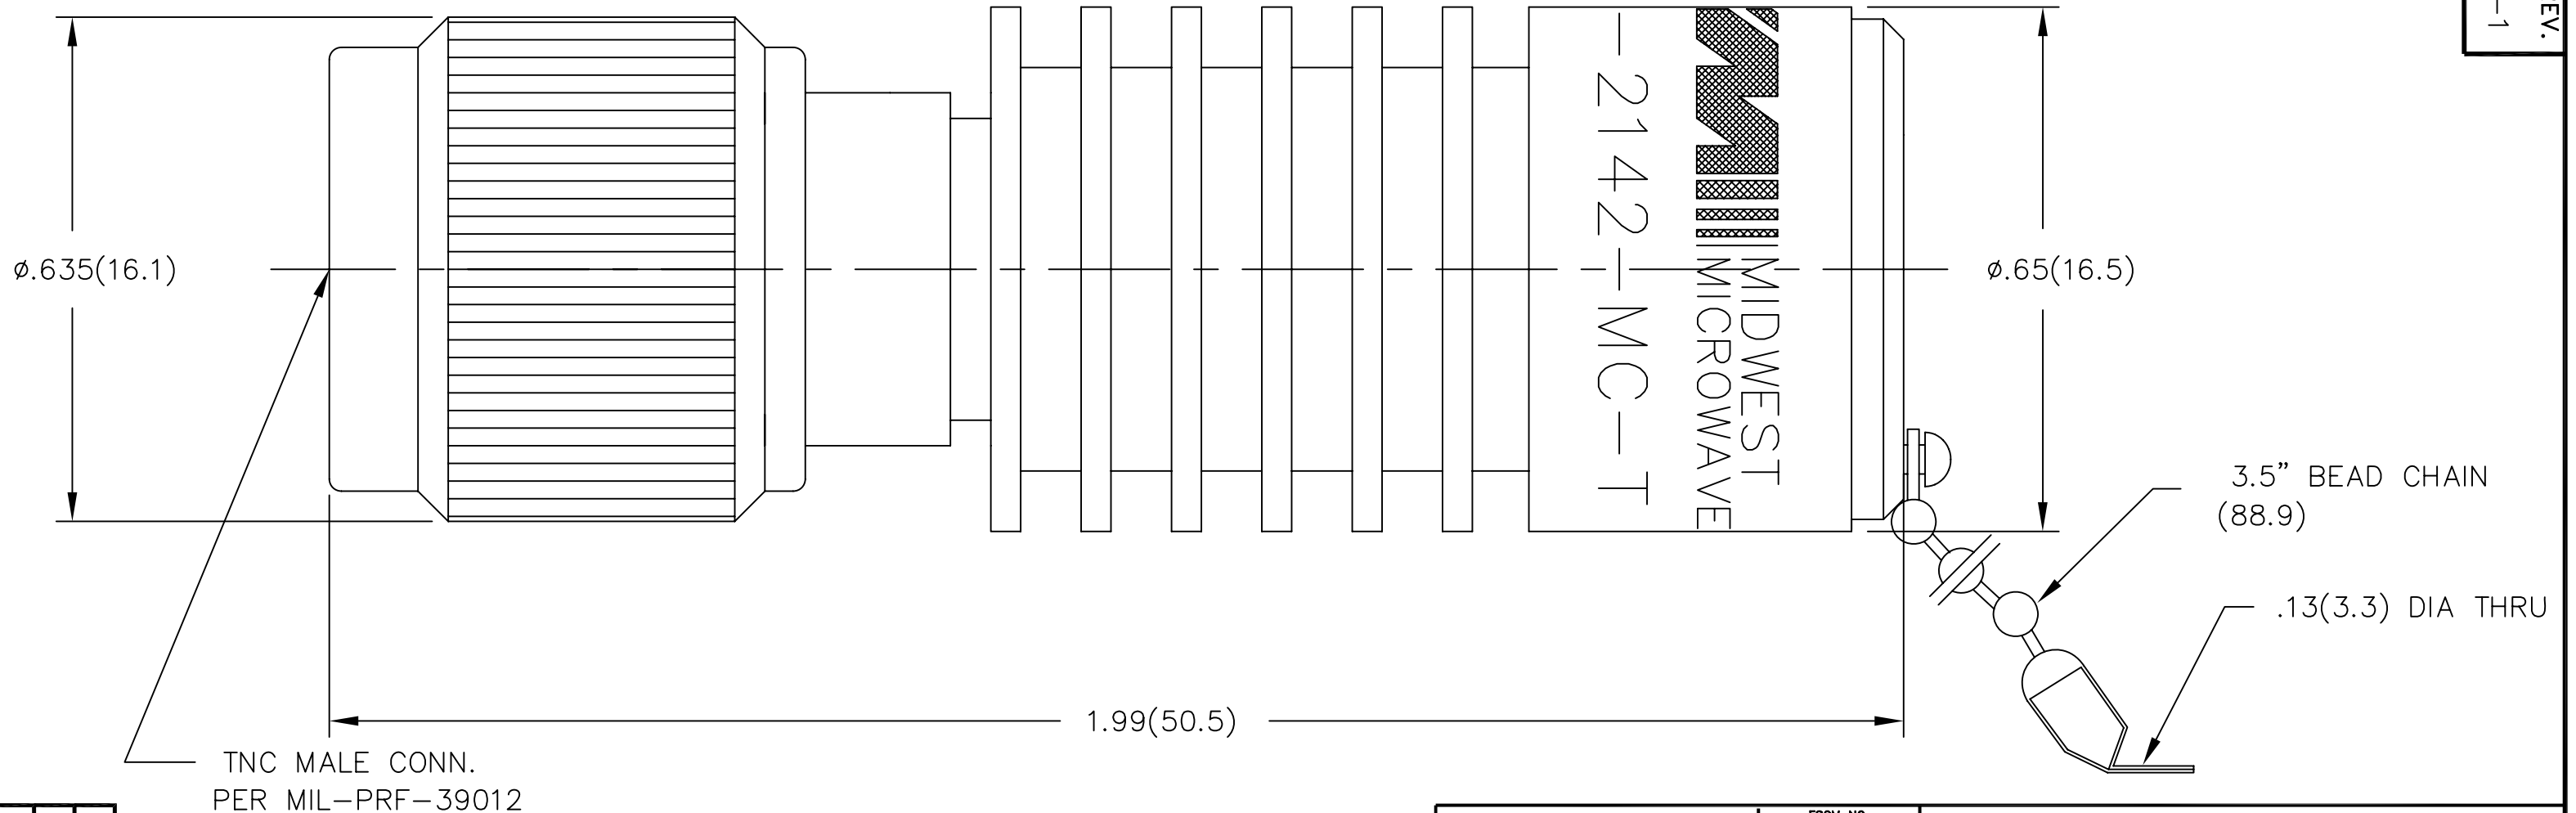

REV.	DESCRIPTION	DATE
-	RELEASED	3/12/99
-1	ADDED TITLEBLOCK	11/4/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°	FSCM NO. 34078		MIDWEST MICROWAVE		
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave			TITLE TERMINATION	
	DRAWN/DATE D.GORTON 3/12/99	ENG./DATE G.KOZAK 3/12/99	DRAWING NUMBER TRM-2142-MC-TNC-07		
	CHECKED/DATE	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1	