

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91 929

SWITCH - BASIC

CATALOG LISTING

V3L-2303

CQ-X1612

CATALOG LISTING
V3L-2303
PAGE 1 OF 1

ISSUE
2

REVISIONS
A CO 80192
DCS 17 OCT 95

REPLACES X96891-V3L

RELEASE NO. PR-20345

CHECK

CHECK

22 OCT 92



DCS

CHECK

20 OCT 92

DCS

DDM/CAD
DRAWN

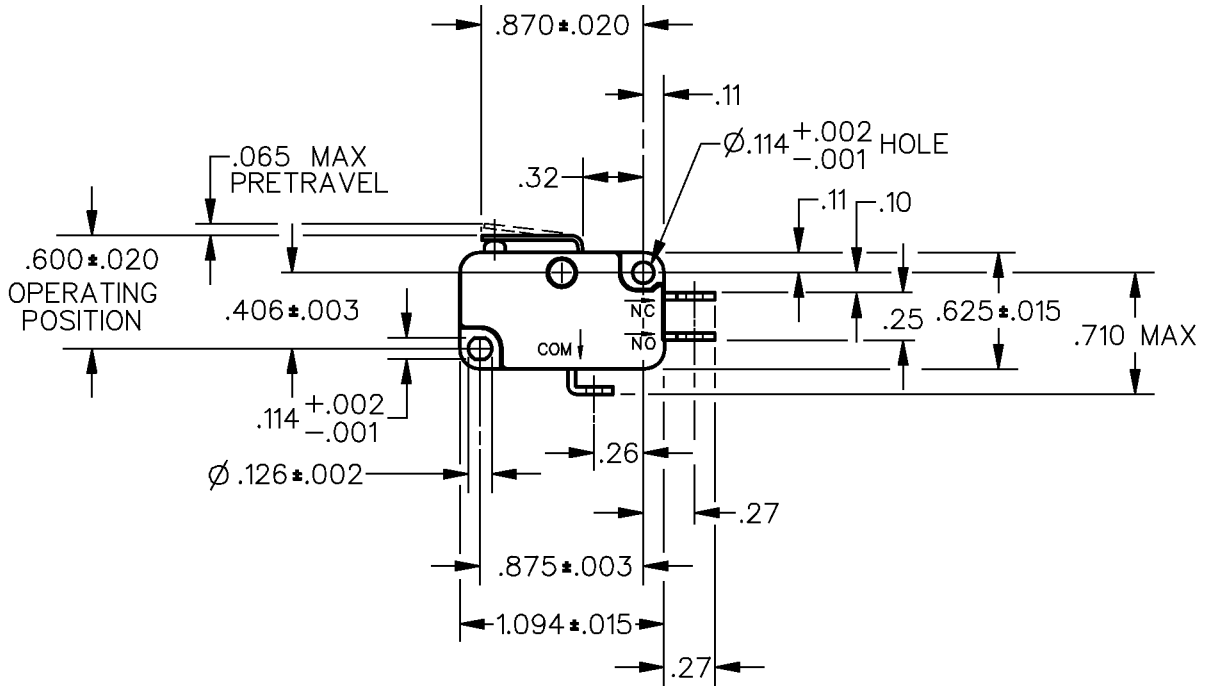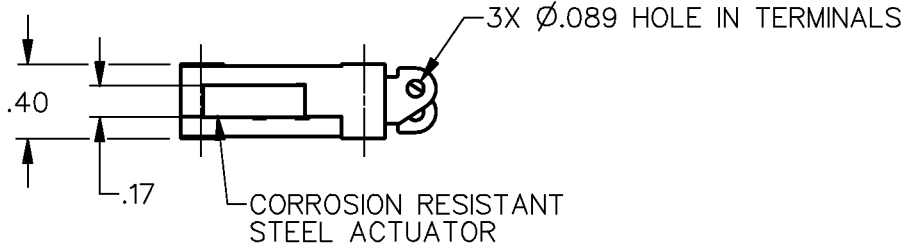


NOTE
1 - TERMINALS ARE PLATED FOR SOLDERING

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



| CHARACTERISTICS | ELECTRICAL DATA | SCALE FULL | DO NOT SCALE PRINT |
|------------------------------------|--------------------------------|--|--------------------|
| OPERATING FORCE — — — 55 GRAMS MAX | CONTACT ARRANGEMENT S P D T | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) ± .030 TWO PLACE (.00) ± .015 THREE PLACE (.000) ± .005 ANGLES ± WEIGHT | |
| RELEASE FORCE — — — 2 GRAMS MIN | L131 | | |
| DIFFERENTIAL TRAVEL — — — .015 MAX | 10A 1/4HP 125 OR 250 VAC | | |
| OVERTRAVEL — — — .030 MIN | 1/2A 125 VDC, 1/4A 250 VDC | | |
| RELEASE TRAVEL — — — .009 MIN | 3A 125 VAC "L" | | |

