


JCA Series

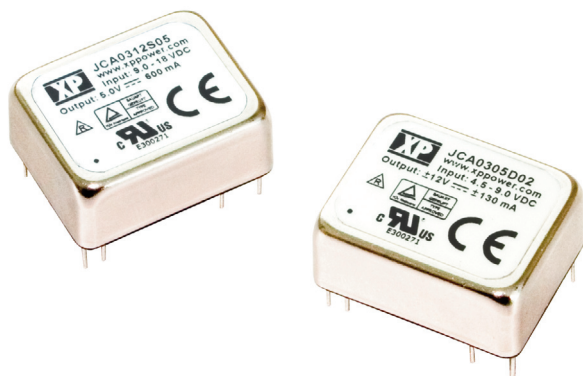

- Compact 1.0" x 0.8" Metal Package
- Industry Standard Pin Out
- 2:1 Input Range
- Single & Dual Outputs
- Operating Temperature $-40\text{ }^{\circ}\text{C}$ to $+100\text{ }^{\circ}\text{C}$
- UL & TUV Approved
- 3 Year Warranty

Specification

Input

| | |
|--------------------------------|---|
| Input Voltage Range | <ul style="list-style-type: none"> • 5 V (4.5-9.0 VDC) • 12 V (9-18 VDC) • 24 V (18-36 VDC) • 48 V (36-75 VDC) |
| Input Current | <ul style="list-style-type: none"> • See table |
| Input Filter | <ul style="list-style-type: none"> • Pi network |
| Input Reflected Ripple Current | <ul style="list-style-type: none"> • 80 mA, 5 V input models, 30 mA all others • 12 μH inductor, 5 Hz to 20 MHz |
| Input Surge | <ul style="list-style-type: none"> • 5 V models 10 V for 1 s max, • 12 V models 25 V for 1 s max, • 24 V models 50 V for 1 s max, • 48 V models 100 V for 1 s max |

Output

| | |
|--------------------------|---|
| Output Voltage | <ul style="list-style-type: none"> • See table |
| Initial Set Accuracy | <ul style="list-style-type: none"> • $\pm 1\%$ max |
| Start Up Delay | <ul style="list-style-type: none"> • 30 ms max |
| Start Up Rise Time | <ul style="list-style-type: none"> • 3.5 ms typical |
| Minimum Load | <ul style="list-style-type: none"> • No minimum load required |
| Line Regulation | <ul style="list-style-type: none"> • $\pm 0.3\%$ |
| Load Regulation | <ul style="list-style-type: none"> • $\pm 1\%$ |
| Cross Regulation | <ul style="list-style-type: none"> • $\pm 5\%$ on dual output models |
| Transient Response | <ul style="list-style-type: none"> • 4% max deviation, recovery to within 1% in $< 500\text{ }\mu\text{s}$ for a 25% load change at 1 A/μs |
| Ripple & Noise | <ul style="list-style-type: none"> • 50 mV pk-pk, 20 MHz bandwidth |
| Overcurrent Protection | <ul style="list-style-type: none"> • 150% typical, trip and restart (hiccup mode) |
| Short Circuit Protection | <ul style="list-style-type: none"> • Continuous with auto recovery |
| Overvoltage Protection | <ul style="list-style-type: none"> • 150% typical, Recycle input to reset |
| Temperature Coefficient | <ul style="list-style-type: none"> • $\pm 0.05\%/^{\circ}\text{C}$ |

General

| | |
|---------------------|---|
| Efficiency | <ul style="list-style-type: none"> • See table |
| Isolation | <ul style="list-style-type: none"> • 1500 VDC Input to Output, basic insulation • 500 VDC Input to Case • 500 VDC Output to Case |
| Switching Frequency | <ul style="list-style-type: none"> • 300 kHz typical |
| Power Density | <ul style="list-style-type: none"> • JCA02: 6.25 W/in³, JCA03: 9.38 W/in³ |
| MTBF | <ul style="list-style-type: none"> • $> 2\text{ Mhrs}$ to MIL-HDBK-217F at $25\text{ }^{\circ}\text{C}$, GB |

Environmental

| | |
|-----------------------|--|
| Operating Temperature | <ul style="list-style-type: none"> • $-40\text{ }^{\circ}\text{C}$ to $+100\text{ }^{\circ}\text{C}$ output power derates from 100% load at $+75\text{ }^{\circ}\text{C}$ linearly to 0% load at $+100\text{ }^{\circ}\text{C}$ |
| Case Temperature | <ul style="list-style-type: none"> • $+100\text{ }^{\circ}\text{C}$ max |
| Storage Temperature | <ul style="list-style-type: none"> • $-55\text{ }^{\circ}\text{C}$ to $+125\text{ }^{\circ}\text{C}$ |
| Cooling | <ul style="list-style-type: none"> • Convection cooled |
| Operating Humidity | <ul style="list-style-type: none"> • Up to 95% RH, non-condensing |

EMC & Safety

| | |
|--------------------|---|
| Emissions | <ul style="list-style-type: none"> • EN55022, level A conducted (level B with external components, see application note), level B radiated |
| ESD Immunity | <ul style="list-style-type: none"> • EN61000-4-2, level 2 Perf Criteria A |
| Radiated Immunity | <ul style="list-style-type: none"> • EN61000-4-3, 3 V/m Perf Criteria A |
| Conducted Immunity | <ul style="list-style-type: none"> • EN61000-4-6, 3 V rms Perf Criteria A |
| Magnetic Fields | <ul style="list-style-type: none"> • EN61000-4-8, 10 A/m, Perf Criteria A |
| Safety Approvals | <ul style="list-style-type: none"> • EN62368-1, UL62368-1, IEC62368-1 CE Mark LVD |


| Input Voltage ⁽¹⁾ | Output Voltage | Output Current | Input Current ⁽²⁾ | | Efficiency | Model Number |
|------------------------------|----------------|----------------|------------------------------|-----------|------------|--------------|
| | | | No Load | Full Load | | |
| 4.5-9.0 VDC | 3.3 VDC | 0.600 A | 28 mA | 560 mA | 69% | JCA0205S03 |
| | 5.0 VDC | 0.400 A | 10 mA | 535 mA | 73% | JCA0205S05 |
| | 12.0 VDC | 0.170 A | 15 mA | 526 mA | 74% | JCA0205S12 |
| | 15.0 VDC | 0.140 A | 26 mA | 559 mA | 74% | JCA0205S15 |
| | ±5.0 VDC | ±0.200 A | 15 mA | 502 mA | 74% | JCA0205D01 |
| | ±12.0 VDC | ±0.085 A | 19 mA | 537 mA | 73% | JCA0205D02 |
| 9-18 VDC | 3.3 VDC | 0.600 A | 8 mA | 225 mA | 72% | JCA0212S03 |
| | 5.0 VDC | 0.400 A | 5 mA | 224 mA | 74% | JCA0212S05 |
| | 12.0 VDC | 0.170 A | 5 mA | 223 mA | 74% | JCA0212S12 |
| | 15.0 VDC | 0.140 A | 7 mA | 227 mA | 74% | JCA0212S15 |
| | ±5.0 VDC | ±0.200 A | 10 mA | 219 mA | 74% | JCA0212D01 |
| | ±12.0 VDC | ±0.085 A | 9 mA | 223 mA | 74% | JCA0212D02 |
| 18-36 VDC | 3.3 VDC | 0.600 A | 3 mA | 112 mA | 73% | JCA0224S03 |
| | 5.0 VDC | 0.400 A | 3 mA | 107 mA | 75% | JCA0224S05 |
| | 12.0 VDC | 0.170 A | 4 mA | 109 mA | 75% | JCA0224S12 |
| | 15.0 VDC | 0.140 A | 4 mA | 111 mA | 75% | JCA0224S15 |
| | ±5.0 VDC | ±0.200 A | 3 mA | 107 mA | 76% | JCA0224D01 |
| | ±12.0 VDC | ±0.085 A | 5 mA | 108 mA | 76% | JCA0224D02 |
| 36-75 VDC | 3.3 VDC | 0.600 A | 3 mA | 62 mA | 71% | JCA0248S03 |
| | 5.0 VDC | 0.400 A | 5 mA | 58 mA | 70% | JCA0248S05 |
| | 12.0 VDC | 0.170 A | 3 mA | 58 mA | 70% | JCA0248S12 |
| | 15.0 VDC | 0.140 A | 3 mA | 59 mA | 72% | JCA0248S15 |
| | ±5.0 VDC | ±0.200 A | 2 mA | 56 mA | 73% | JCA0248D01 |
| | ±12.0 VDC | ±0.085 A | 3 mA | 57 mA | 73% | JCA0248D02 |
| | ±15.0 VDC | ±0.070 A | 3 mA | 60 mA | 70% | JCA0248D03 |

| Input Voltage ⁽¹⁾ | Output Voltage | Output Current | Input Current ⁽²⁾ | | Efficiency | Model Number |
|------------------------------|----------------|----------------|------------------------------|-----------|------------|--------------|
| | | | No Load | Full Load | | |
| 4.5-9.0 VDC | 3.3 VDC | 0.910 A | 28 mA | 873 mA | 68% | JCA0305S03 |
| | 5.0 VDC | 0.600 A | 10 mA | 835 mA | 74% | JCA0305S05 |
| | 12.0 VDC | 0.260 A | 15 mA | 805 mA | 75% | JCA0305S12 |
| | 15.0 VDC | 0.200 A | 26 mA | 804 mA | 74% | JCA0305S15 |
| | ±5.0 VDC | ±0.300 A | 15 mA | 778 mA | 74% | JCA0305D01 |
| | ±12.0 VDC | ±0.130 A | 19 mA | 793 mA | 74% | JCA0305D02 |
| 9-18 VDC | 3.3 VDC | 0.910 A | 8 mA | 333 mA | 74% | JCA0312S03 |
| | 5.0 VDC | 0.600 A | 5 mA | 324 mA | 75% | JCA0312S05 |
| | 12.0 VDC | 0.260 A | 5 mA | 315 mA | 78% | JCA0312S12 |
| | 15.0 VDC | 0.200 A | 7 mA | 322 mA | 77% | JCA0312S15 |
| | ±5.0 VDC | ±0.300 A | 10 mA | 325 mA | 75% | JCA0312D01 |
| | ±12.0 VDC | ±0.130 A | 9 mA | 313 mA | 75% | JCA0312D02 |
| 18-36 VDC | 3.3 VDC | 0.910 A | 3 mA | 165 mA | 74% | JCA0324S03 |
| | 5.0 VDC | 0.600 A | 3 mA | 157 mA | 77% | JCA0324S05 |
| | 12.0 VDC | 0.260 A | 4 mA | 154 mA | 77% | JCA0324S12 |
| | 15.0 VDC | 0.200 A | 4 mA | 157 mA | 77% | JCA0324S15 |
| | ±5.0 VDC | ±0.300 A | 3 mA | 156 mA | 77% | JCA0324D01 |
| | ±12.0 VDC | ±0.130 A | 5 mA | 154 mA | 77% | JCA0324D02 |
| 36-75 VDC | 3.3 VDC | 0.910 A | 3 mA | 82 mA | 73% | JCA0348S03 |
| | 5.0 VDC | 0.600 A | 5 mA | 82 mA | 74% | JCA0348S05 |
| | 12.0 VDC | 0.260 A | 6 mA | 79 mA | 75% | JCA0348S12 |
| | 15.0 VDC | 0.200 A | 6 mA | 81 mA | 75% | JCA0348S15 |
| | ±5.0 VDC | ±0.300 A | 2 mA | 79 mA | 76% | JCA0348D01 |
| | ±12.0 VDC | ±0.130 A | 3 mA | 78 mA | 76% | JCA0348D02 |
| | ±15.0 VDC | ±0.100 A | 3 mA | 82 mA | 74% | JCA0348D03 |

Notes

1. Nominal input voltage 5, 12, 24 or 48 VDC.
2. Input current is at nominal input voltage.
3. Efficiency is measured at nominal input and full load at 25 °C.

Mechanical Details and Application Note

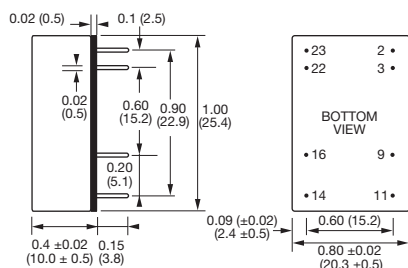

| PIN CONNECTIONS | | |
|-----------------|---------------|-------------|
| Pin | Single Output | Dual Output |
| 2 | -Vin | -Vin |
| 3 | -Vin | -Vin |
| 9 | No pin | Common |
| 11 | N/C | -Vout |
| 14 | +Vout | +Vout |
| 16 | -Vout | Common |
| 22 | +Vin | +Vin |
| 23 | +Vin | +Vin |

1. All dimensions in inches (mm)
2. Weight: 0.03 lbs (12 g)
3. Pin diameter tolerance: ±0.00079 (±0.02)
4. Pin pitch tolerance: ±0.01 (±0.25)
5. Case tolerance: ±0.02 (±0.5)

Input Filter

To meet level B conducted emissions.

