


LOC	DIST	REVISIONS			
P	LR	DESCRIPTION	DATE	OWN	APPD
R2		REVISED PER ECO-12-021923	18DEC2012	GG	MS

- ① DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- ② MATERIAL: POLYESTER FILM 0.025 [.010] THICK.
2 LAYERS EACH SIDE.
COPPER WIRE- 0.23 [.009] THICK x 15.24 [.600] WIDE.
SHIELD- PVC, 0.025 [.010] THICK.
- ③ CABLE MARKED WITH "AMP INC PN 553079
TYPE FCC UL CSA 12 AWG, CU 300V, 20 AMP 60° C"
IN COLOR SPECIFIED FOR CONTINUOUS LENGTH OF ROLL AS SHOWN.
- ④ CAUTION: THE UNDERCARPET CABLE MAY NOT BE USED OUTDOORS OR IN WET LOCATIONS; WHERE THE CABLE WOULD BE SUBJECT TO CORROSIVE VAPORS; IN ANY HAZARDOUS (CLASSIFIED) LOCATION; OR IN RESIDENTIAL, SCHOOL, AND HOSPITAL BUILDINGS.

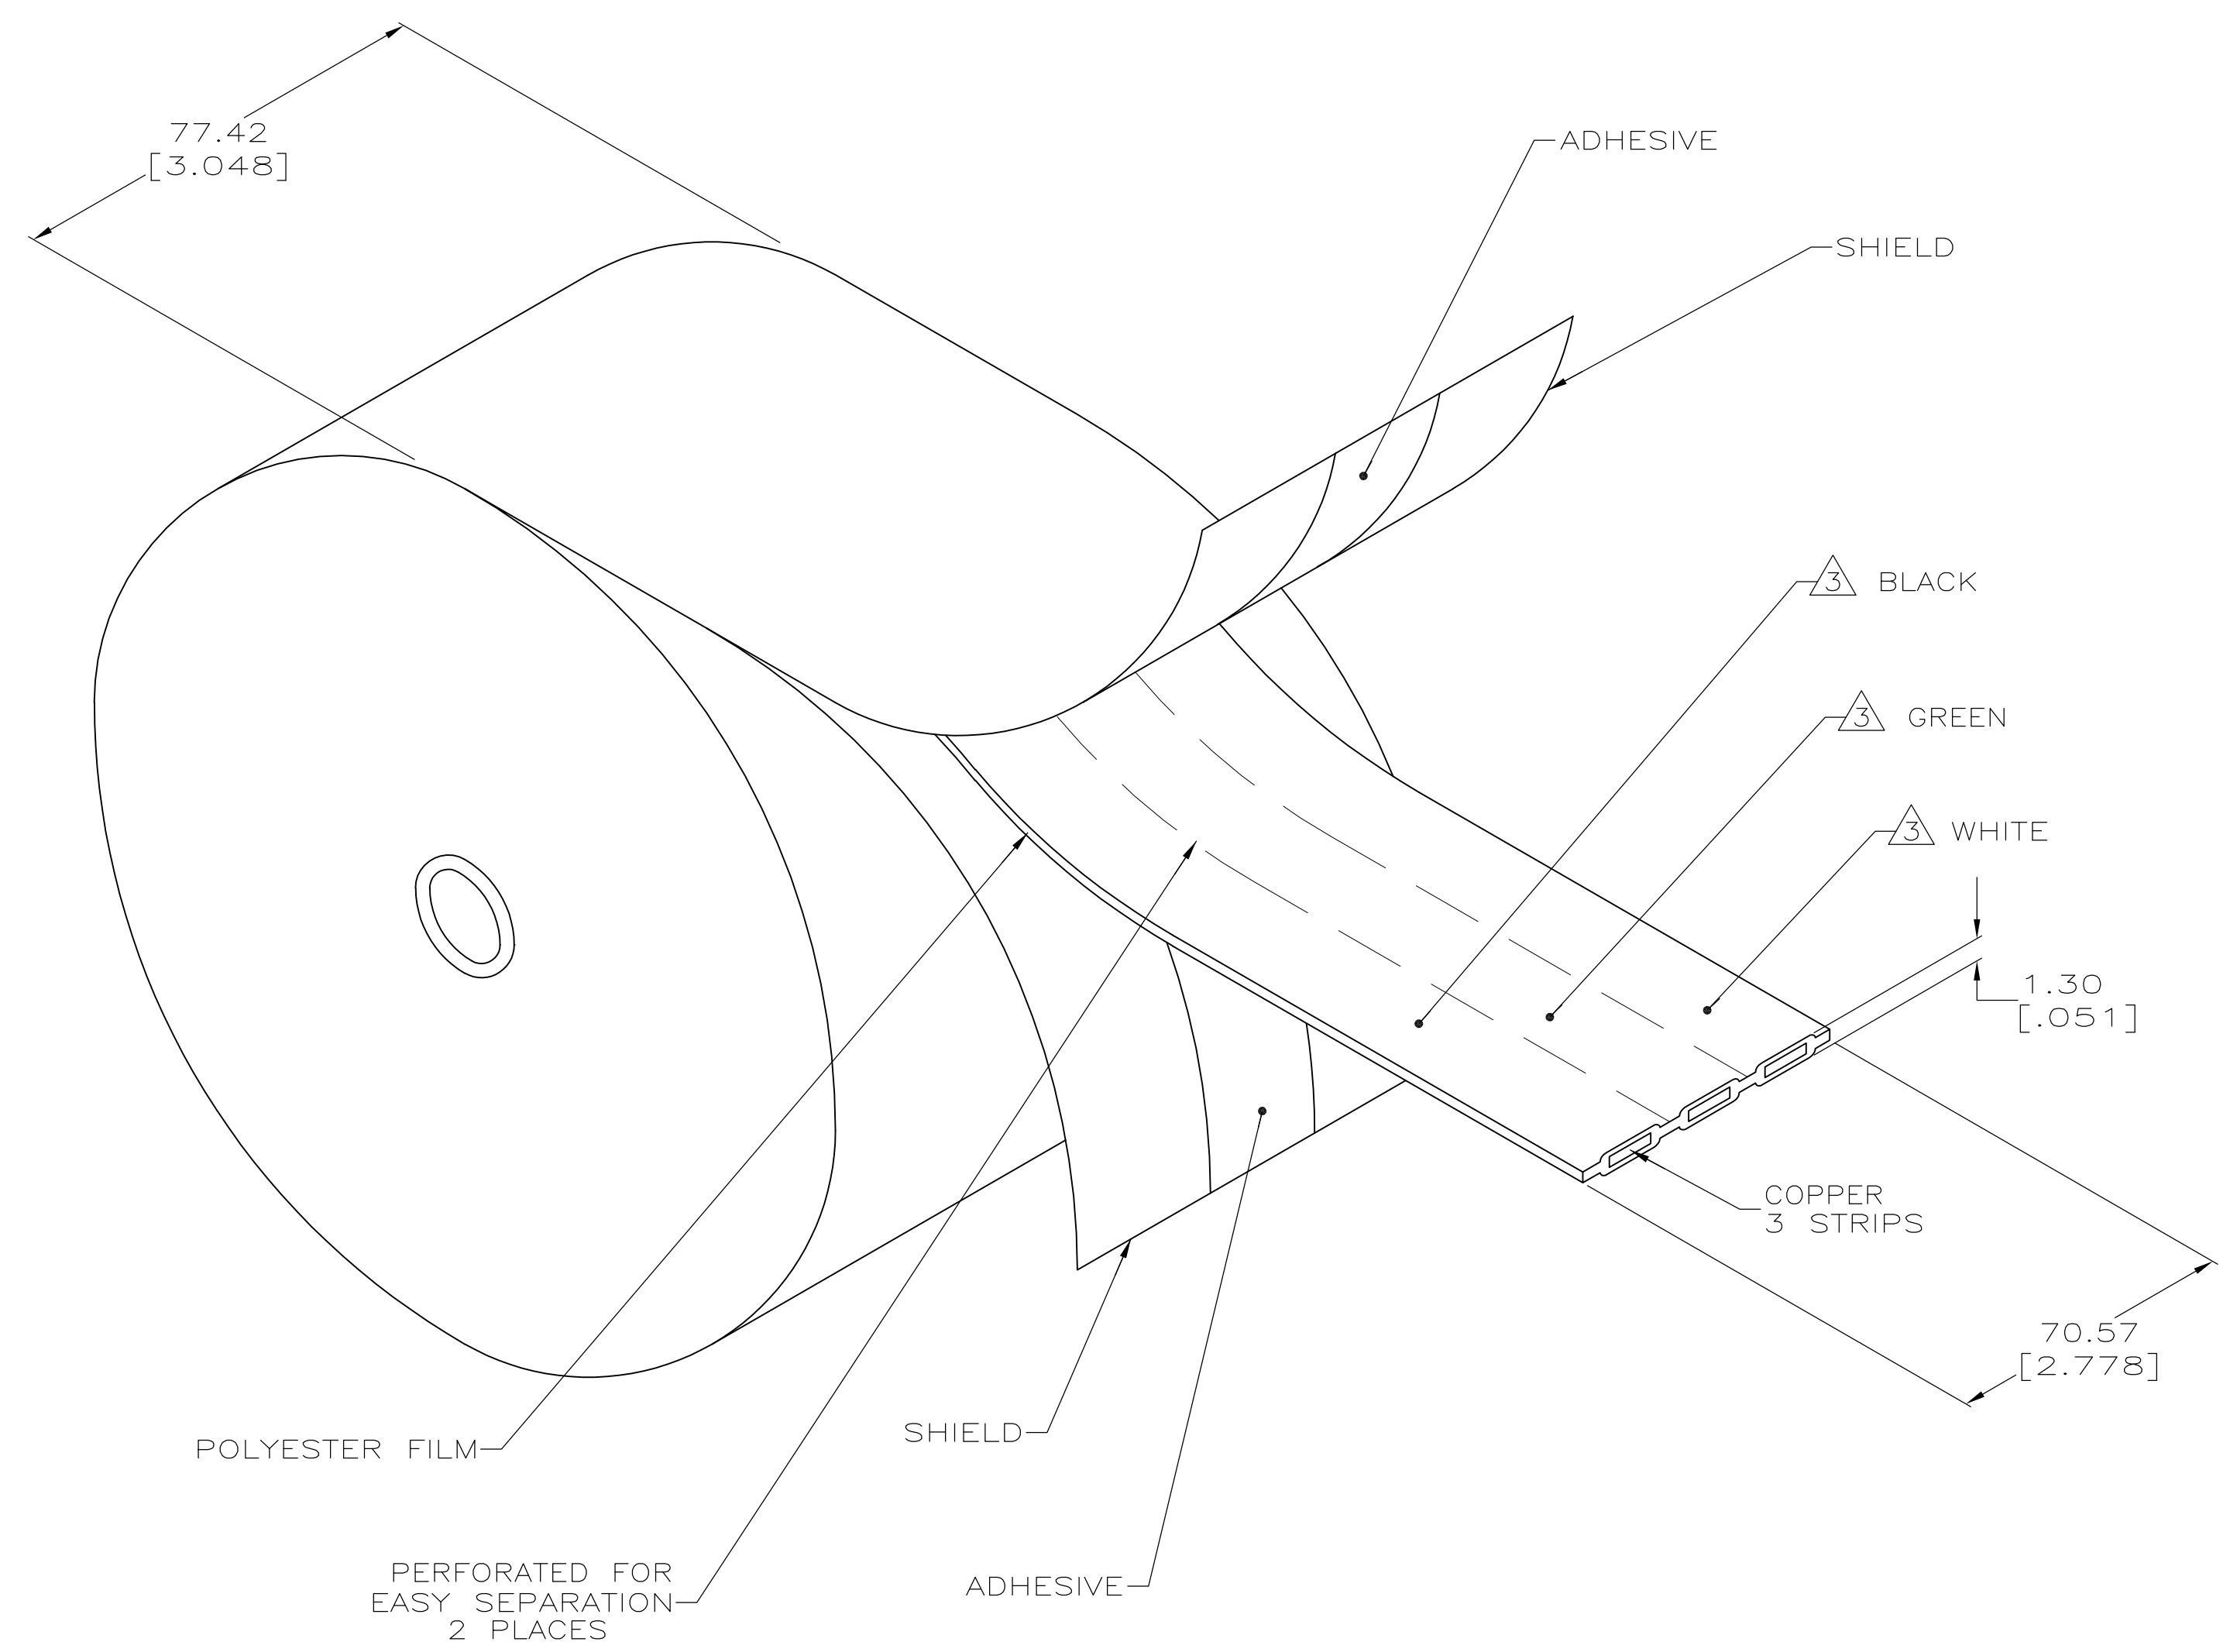

30.7 [100]	3-553079-4
15.5 [50]	3-553079-3
76.5 [250]	3-553079-1
9.14 [30]	1-553079-7
LENGTH PER REEL - M [FEET]	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN L. HALL 31AUG2005	NAME
DIMENSIONS: mm(INCHES)		CHK R. SPEER 31AUG2005	TE Connectivity
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. SPEER 31AUG2005	CABLE, FLAT, 3 CONDUCTOR, 12 AWG, POWER, UNDERCARPET
0 PLC ± -	①	PRODUCT SPEC	108-6038
1 PLC ± -		APPLICATION SPEC	114-6008
2 PLC ± -		WEIGHT	-
3 PLC ± -		SIZE	A1
4 PLC ± -		CAGE CODE	00779
ANGLES ± -		DRAWING NO	C=553079
FINISH		RESTRICTED TO	-
MATERIAL - ②		CUSTOMER DRAWING	
		SCALE	NTS
		SHEET	1 OF 1
		REV	R2