

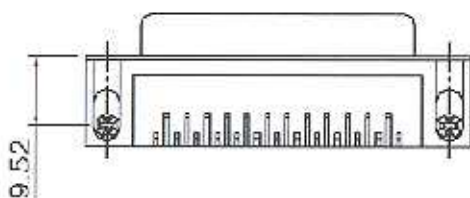



FEMALE

Specifications

- Contact Resistance: 30m ohms max. at DC 100mA
- Insulator Resistance: 1000M ohms min. at DC 500V
- Current Rating: 5 AMP
- Dielectric Withstanding Voltage: AC 1000V For 1 minute
- Operating Temperature: -55°C ~ +150°C
- resist to short term (30s) at 260°C
- Shell : steel, tin plated
- Contact: Copper alloy, 30" selective gold plated
- Housing: Glass-filled thermoplastic (UL 94V-0)

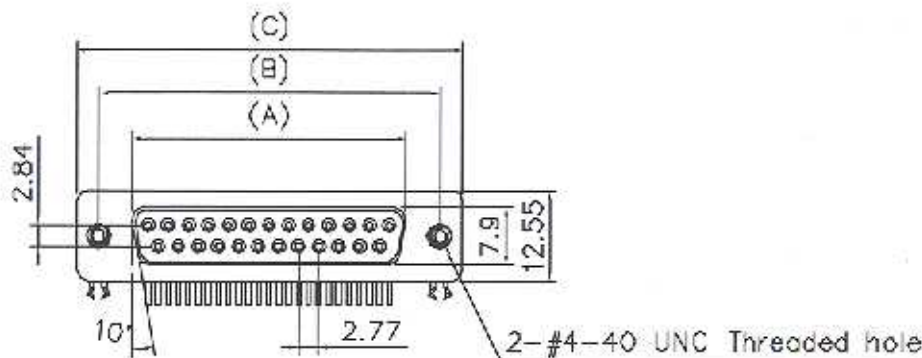

RECOMMENDED PCB LAYOUT

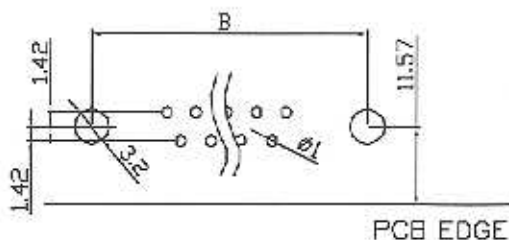

Size	part number	A	B	C
09	L17HTNES4R4C	16.92	24.99	30.81
15	L17HTNAS4R4C	25.25	33.32	39.14
25	L17HTNBS4R4C	38.96	47.04	53.0.4
37	L17HTNCS4R4C	55.42	63.50	69.32

TOLERANCE (mm)	APPROVALS	DATE	TITLE	AMPHENOL	
X -0.3	OR	10/11/01	17HT SERIES D-SUB CONNECTORS PCB RIGHT ANGLE FOOTPRINT: 8.08mm SOCKET	AMPHENOL SOCAPEX	
XX +0.1	JFL	10/11/01		Dole Plant	
XXX -0.05	JFL	10/11/01		Scale N.A.	Sheet 1 of 1
			MM	A4	L17HT N-S 4R4C