



S21 TRANS LOG MAG.
▶ 0.000 dB 0.200 dB/DIV

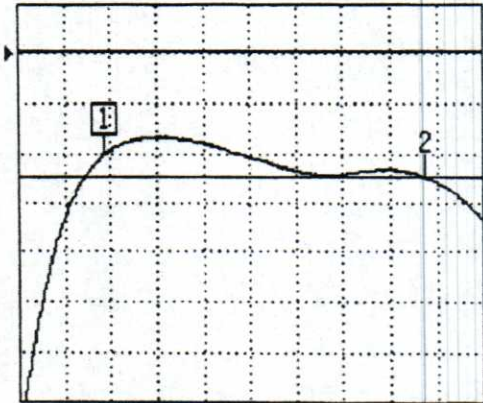


0.350000000 GHz 0.550000000

S11 REFL LOG MAG.
▶ 0.000 dB 5.000 dB/DIV

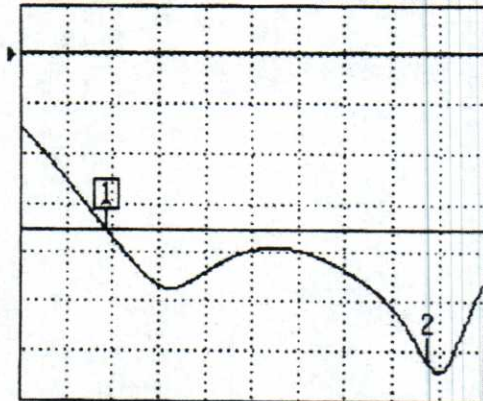


0.350000000 GHz 0.550000000

S22 REFL LOG MAG.
▶ 0.000 dB 5.000 dB/DIV

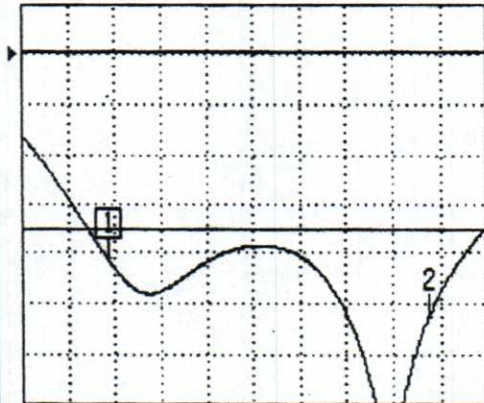

0.350000000 GHz 0.550000000

S12 TRANS LOG MAG.
▶ 0.000 dB 5.000 dB/DIV

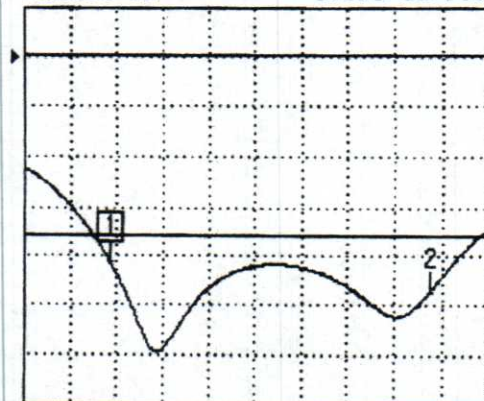

0.350000000 GHz 0.550000000

CH 1 - S21
0.0000 mm REF
0.000 dB OFFSET
0.00° OFFSET

▶ MARKER 1
0.387500000 GHz
-0.408 dB

MARKER TO MAX
MARKER TO MIN

2 0.525500000 GHz
-0.498 dB

MARKER READOUT
FUNCTIONS

D3C0405 Circulator
400 - 500 MHz

Isolation: 18 dB Min

Insertion Loss: 0.50 dB Max

VSWR: 1.30 dB Max

SMA-F Connectors