


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00580	Connector, USB A micro male	2	
2	30-00099	Wire, 4C, 1PR + 2C, 28 AWG, UL2725, 30V, 80C, 3.6mm, shielded, VW-1, PVC, 79A, USB 2.0, white	1	
3	24-00218	Overmold, plug, USB micro and mini, slim design for aluminum shell	2	PVC, white
4	55-00108	USB mini & micro aluminum shell, 13x9.6x5.8 mm, silver	2	

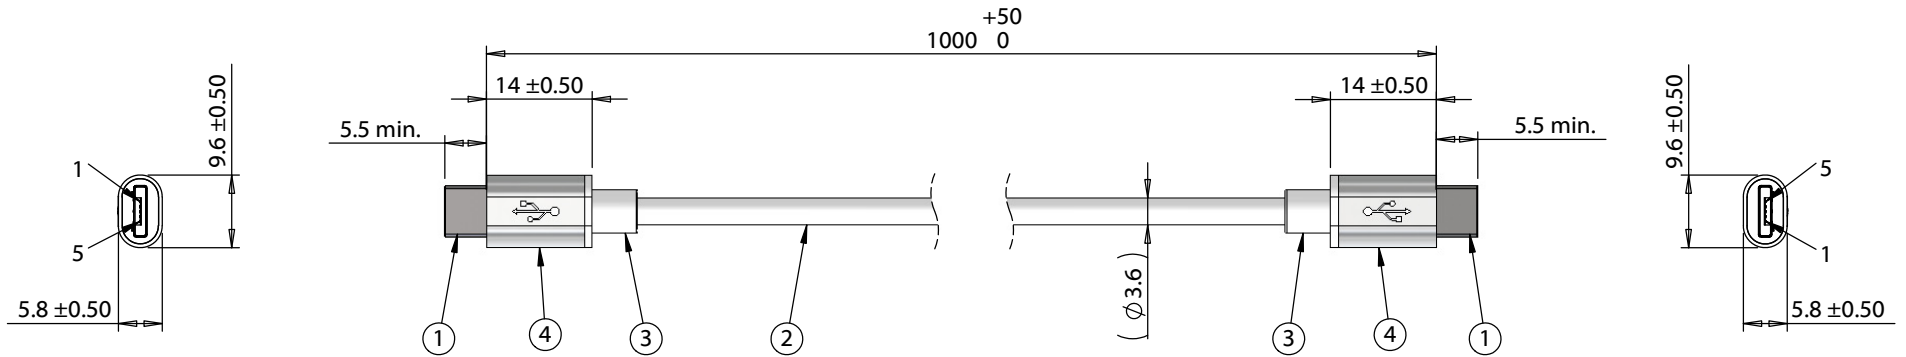

Wiring diagram		
50-00580	Wire Color	50-00580
1	Red	1
2	White	2
3	Green	3
4 & 5	Black	4 & 5
Shell	Drain & Shield	Shell

Notes:
Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared:	Notes: RoHS compliant	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	01/19/2018	Initial release	Verified:		
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:	Size: Part number:
				Cable, 1000 mm, 50-00580 USB A micro plug to same, 28 AWG, 30-00099 wire, white	A 10-02360
				Scale: 1:1	Sheet 1 of 1

5

4

3

2

1