
	Ξ	۵	п	т			0	Φ	A	
4		V Thread	ØS							4
ω				<b>~</b> ~~			LAYOUT SHOW	N AS EXAMPLE		3
-Standa	ACTERISTICS ard : Based on MIL-DTL-38		Keying Shov	vn as example Connector dimension Dim Nominal						
-Shell Pl -Insulat -Contac	Shell Material : Aluminium   -Shell Plating : Black Zinc Nickel   -Insulator : Thermoplastic   -Contacts : Copper Alloy   -Seals & Grommet : Silicon Elastomer					SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)				
-Durabi -Deliver	ility : 500 M red with Souriau contacts		num						Listed	2
-Salt Sp -Mass	-					A 19-10-2016 ISS DATE Designed By:	First Release Latest modification - by Date:	CUS	MOD STOMER DRAWING	<u>N°</u>
				1		TITLE	Alı General I	uminium Plug 8D se		
	YPE : Plug with RFI Shie		Z 97 S N			NA	Tolerani ±		IPRDS / PROJECT 859 This document is the property of	1
	CT TYPE : Standard Crir	np Contact		ORI CONTACT TYPE : SOCKET	ENTATION : N (500 Matings)	SOURIAU	WWW.SOURIA		SOURIAU it must not be reproduced or communicated without permission	
PLATINO	G : Z = Black Zinc	Nickel		CONTACT LA	AYOUT : 15-97	FORMAT A3		IAU DRG N° 15Z97SN-C	SHEE 1/2	
	H	G	F	E	$\bigvee$	D	С	В	A	

	I	۵	п	m	D	0
		Contact Layout				
4	د	$ \begin{array}{c} & & & & \\ & & & & \\ & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & $				
	B +.178 (4.52) C +.230 (5.84) D +.178 (4.52) E +.065 (1.65)	Contacts       (Insert arrangement 15-97)     Contact     Location       Y-axis     position     X-axis     Y-axis       (mm)     ID     (mm)     (mm)       +234 (5.94)     G     -207 (5.26)     -095 (2.41)       +178 (4.52)     H     -234 (5.94)     +065 (1.65)       -178 (4.52)     K     -065 (1.65)     +234 (5.94)       -178 (4.52)     K     -065 (1.65)     +234 (5.94)       -234 (5.94)     L     -047 (1.19)     +081 (2.06)       -235 (5.97)     M     +047 (1.19)     -081 (2.06)				
	size no. cor	Inter of tacts     Size contacts     Service rating     Contact location     Supersedes       4     16     I     C, G, L, M All others     MS20052-97	-			
ω						
	L					
						SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda
N						Count FR
						PN: 8D515
					A 19-10-2 ISS DAT Designed By:	016 First Release E Latest modification - by Date:
					TITLE	Alumir
<b>→</b>					SCALE NA	General linear Tolerances: ±
					SOURIA	
				_	FORMAT A3	SOURIAU 8D515Z
L	Н	G	F	E	D	C

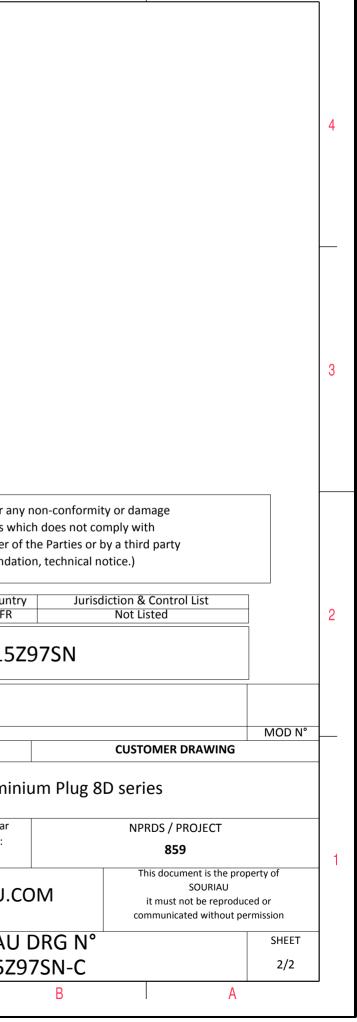

 $\triangleright$ 

σ