

NTC ACCURATE THERMISTORS

NP30 - NJ 28 – NI 24 – NK 20



High precision resistance and an outstanding ability to reproduce the sensibility index B, make these ranges of products the types of thermistors ideal for temperature measurement applications.

Leaded or unleaded, these small size and rapid response time thermistors

are able to meet the most accurate requirements.

FEATURES

- High Accuracy
- Fast thermal response
- Commercial, Industrial and Automotive Applications
- AEC-Q200 based qualification

OPTIONS

Consult factory for availability of options

- other nominal resistance values
- other tolerances
- controlled dimensions (e.g. reduced head size for NP30)
- alternative lead materials (e.g. steel, nickel)
- customized lead lengths, spacing, forming (kink) etc.
- epoxy coating on leads (NP30)

APPLICATIONS

- Temperature measurement
- Liquid level or flow detection
- Alarms and fire detectors
- HVAC and Refrigeration
- Fans
- Air intake temperature
- Electric pump module
- Water Temperature
- Evaporator probe
- and more

| Types | NP 30 | NJ 28 | NI 24 | NK 20 |
|--|---|---|---|---|
| Finish | Coated chip with epoxy+ tinned copper wires | Coated chip with phenolic resin + varnish + tinned copper wires | Coated chip with epoxy AWG30 insulated leads + Silver plated nickel wires | Chip for Wire bonding |
| DIMENSIONS: millimeters (inches) | | | | <p>Typical dimensions could differ for some modules</p> |
| Marking | On packaging only | | | |
| Operating temperature | -55°C to +150°C | | | |
| Tolerance on Rn (25°C) | ±1%, ±2%, ±3%, ±5% | | | |
| Maximum dissipation at 25°C | 0.16 W | | | |
| Thermal dissipation factor | 4 mW/°C | 3 mW/°C | 1.5 mW/°C | 2 mW/°C |
| Thermal time constant | 9 s | 8 s | 16 s | 6 s |
| Response time | < 2 s | | | |

NTC ACCURATE THERMISTORS



NP30 - NJ 28 – NI 24 – NK 20

HOW TO ORDER

NP30

Type
NP30
NJ28
NI24
NK20

MA

Material Code
MA
(See table above)

0502

Resistance
5 kΩ
(See table above)

H

Tolerance
F (±1%)
G (±2%)
H (±3%)
J (±5%)

--

Packaging
--: Bulk
CA: Ammopack, H=16mm*
CB: Tape & Reel, H=16mm*
CC: Tape & Reel, H=19mm*
CD: Tape & Reel, H=19mm*

*Available for NP30 and NJ28 only
(See table page 25)

TABLE OF VALUES-NP30-NJ28-NI24-NK20

| AVX PN | Rn at 25°C (Ω) | Available Rn Tol at 25°C | Material Code | B25/85 (K) | at 25°C (%/°C) |
|---------------|----------------|--------------------------|---------------|------------|----------------|
| N__JA0501 --- | 500 | F, G, H, J | JA | 3564±1% | -3.91 |
| N__JA0102 --- | 1,000 | F, G, H, J | JA | 3564±1% | -3.91 |
| N__JA0202 --- | 2,000 | F, G, H, J | JA | 3564±1% | -3.91 |
| N__KA0202 --- | 2,000 | F, G, H, J | KA | 3625±1% | -4.38 |
| N__JA0212 --- | 2,100 | F, G, H, J | JA | 3564±1% | -3.91 |
| N__MA0222 --- | 2,200 | F, G, H, J | MA | 3965±0.5% | -4.38 |
| N__ME0222 --- | 2,200 | F, G, H, J | ME | 3975±0.5% | -4.40 |
| N__MA0272 --- | 2,700 | F, G, H, J | MA | 3965±0.5% | -4.38 |
| N__ME0272 --- | 2,700 | F, G, H, J | ME | 3975±0.5% | -4.40 |
| N__MN0272 --- | 2,700 | F, G, H, J | MN | 4077±0.5% | -4.47 |
| N__MA0282 --- | 2,800 | F, G, H, J | MA | 3965±0.5% | -4.38 |
| N__ME0282 --- | 2,800 | F, G, H, J | ME | 3975±0.5% | -4.40 |
| N__MN0282 --- | 2,800 | F, G, H, J | MN | 4077±0.5% | -4.47 |
| N__MA0302 --- | 3,000 | F, G, H, J | MA | 3965±0.5% | -4.38 |
| N__ME0302 --- | 3,000 | F, G, H, J | ME | 3975±0.5% | -4.40 |
| N__MN0302 --- | 3,000 | F, G, H, J | MN | 4077±0.5% | -4.47 |
| N__MA0392 --- | 3,900 | F, G, H, J | MA | 3965±0.5% | -4.38 |
| N__MN0392 --- | 3,900 | F, G, H, J | ME | 3975±0.5% | -4.40 |
| N__ME0392 --- | 3,900 | F, G, H, J | MN | 4077±0.5% | -4.47 |
| N__MA0472 --- | 4,700 | F, G, H, J | MA | 3965±0.5% | -4.38 |
| N__ME0472 --- | 4,700 | F, G, H, J | ME | 3975±0.5% | -4.40 |
| N__MN0472 --- | 4,700 | F, G, H, J | MN | 4077±0.5% | -4.47 |
| N__MA0502 --- | 5,000 | F, G, H, J | MA | 3965±0.5% | -4.38 |
| N__ME0502 --- | 5,000 | F, G, H, J | ME | 3975±0.5% | -4.40 |
| N__MN0502 --- | 5,000 | F, G, H, J | MN | 4077±0.5% | -4.47 |
| N__MA0512 --- | 5,100 | F, G, H, J | MA | 3965±0.5% | -4.38 |
| N__ME0512 --- | 5,100 | F, G, H, J | ME | 3975±0.5% | -4.40 |
| N__MN0512 --- | 5,100 | F, G, H, J | MN | 4077±0.5% | -4.47 |
| N__MA0602 --- | 6,000 | F, G, H, J | MA | 3965±0.5% | -4.38 |
| N__ME0602 --- | 6,000 | F, G, H, J | ME | 3975±0.5% | -4.4 |
| N__MN0602 --- | 6,000 | F, G, H, J | MN | 4077±0.5% | -4.47 |

___ = Insert Product type (NP30, NJ28, NI24, NK20)

--- = Insert Tolerance and packaging code



The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

NTC ACCURATE THERMISTORS

NP30 - NJ 28 – NI 24 – NK 20



TABLE OF VALUES–NP30–NJ28–NI24–NK20

| AVX PN | Rn at 25°C (Ω) | Available Rn Tol at 25°C | Material Code | B25/85 (K) | at 25°C (%/°C) |
|---------------|----------------|--------------------------|---------------|------------|----------------|
| N__MA0702 --- | 7,000 | F, G, H, J | MA | 3965±0.5% | -4.38 |
| N__ME0702 --- | 7,000 | F, G, H, J | ME | 3975±0.5% | -4.4 |
| N__MN0702 --- | 7,000 | F, G, H, J | MN | 4077±0.5% | -4.47 |
| N__MA0802 --- | 8,000 | F, G, H, J | MA | 3965±0.5% | -4.38 |
| N__ME0802 --- | 8,000 | F, G, H, J | ME | 3975±0.5% | -4.4 |
| N__MN0802 --- | 8,000 | F, G, H, J | MN | 4077±0.5% | -4.47 |
| N__MA0103 --- | 10,000 | F, G, H, J | MA | 3965±0.5% | -4.38 |
| N__NA0103 --- | 10,000 | F, G, H, J | NA | 4100±1% | -4.6 |
| N__NA0123 --- | 12,000 | F, G, H, J | NA | 4100±1% | -4.6 |
| N__NA0153 --- | 15,000 | F, G, H, J | NA | 4100±1% | -4.6 |
| N__PA0203 --- | 20,000 | F, G, H, J | PA | 4235±1% | -4.8 |
| N__PA0253 --- | 25,000 | F, G, H, J | PA | 4235±1% | -4.8 |
| N__PA0303 --- | 30,000 | F, G, H, J | PA | 4235±1% | -4.8 |
| N__QA0473 --- | 47,000 | F, G, H, J | QA | 4250±1% | -4.8 |
| N__QA0503 --- | 50,000 | F, G, H, J | QA | 4250±1% | -4.8 |
| N__RA0104 --- | 100,000 | F, G, H, J | RA | 4380±1% | -4.9 |
| N__RA0154 --- | 150,000 | F, G, H, J | RA | 4380±1% | -4.9 |
| N__RA0204 --- | 200,000 | F, G, H, J | RA | 4380±1% | -4.9 |







--- = Insert Product type (NP30, NJ28, NI24, NK20)

--- = Insert Tolerance and packaging code



NTC THERMISTORS MANUFACTURING PROCESS


NP30 - NJ 28 - NI 24 - NK 20

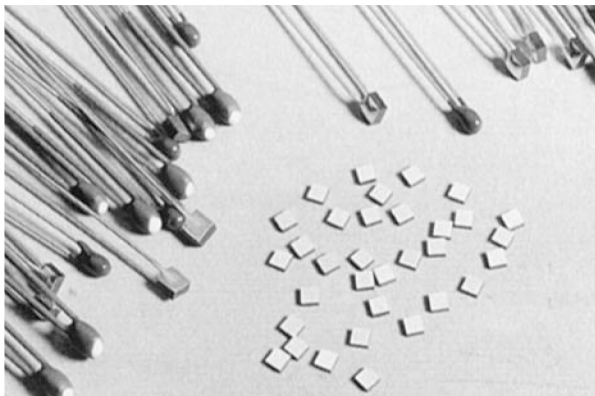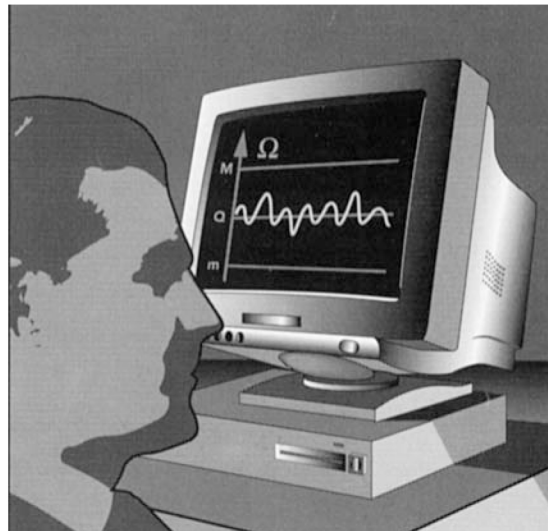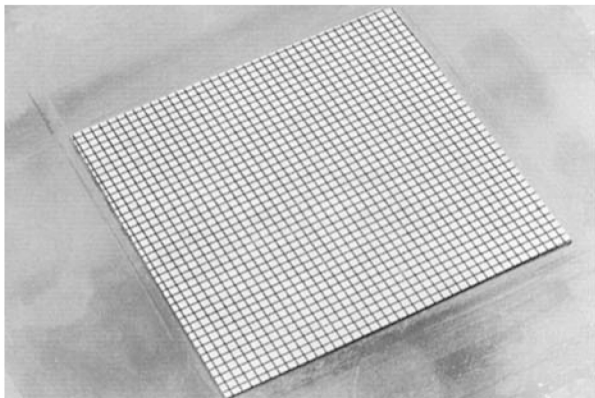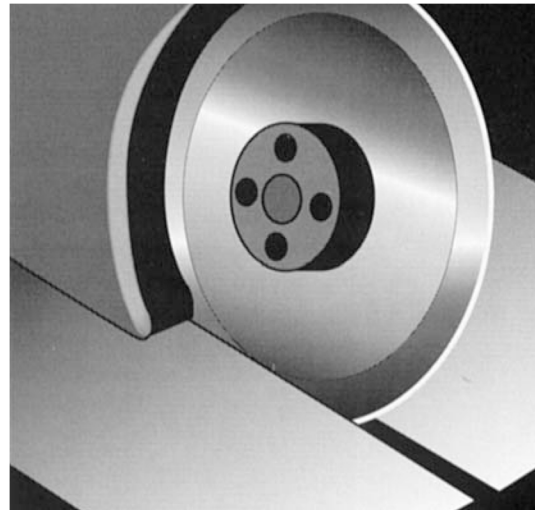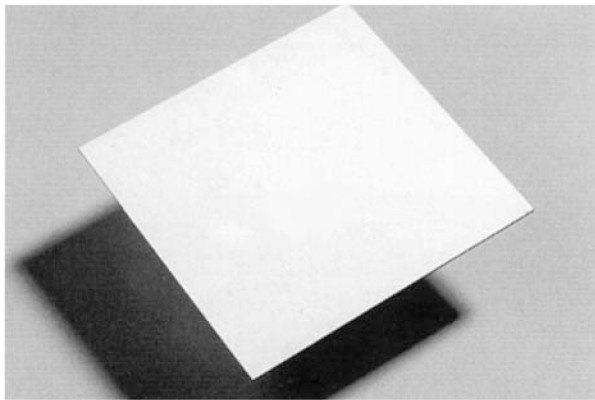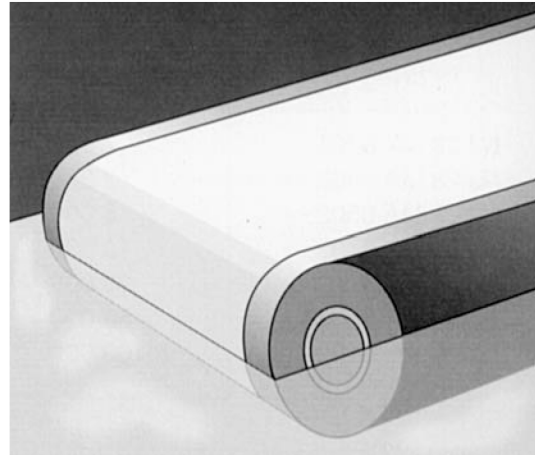

The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

NTC DISC THERMISTORS

ND 03/06/09 – NE 03/06/09 – NV 06/09



APPLICATIONS

- ND or NE: Commercial, Industrial and Automotive Applications AEC-Q200 based Qual
NV: Professional Applications
- Alarm and temperature measurement application
- Temperature regulation application
- Level detection application
- Compensation application and more

TECHNOLOGY

- ND: epoxy-phenolic resin coating
NE: epoxy resin coating (recommended for severe mounting conditions)
NV: epoxy varnish coating
- Leads: Radial copper wire tinned
- Marking: on package only for ND03 & NE03
ND/NE 06/09: Nominal resistance and tolerance for $\pm 5\%$, $\pm 10\%$
NV06/09: Nominal resistance and tolerance
- Delivery Mode: Bulk, reeled or ammopacked

PERFORMANCE CHARACTERISTICS

| Types | General purpose | | | Professional | |
|-----------------------------|---|-------------------------------|-------------------------------|-------------------------|-------------------------|
| | ND03 or NE03 | ND06 or NE06 | ND09 or NE09 | NV06 | NV09 |
| Climatic category | | | | 55/125/56-434 | 55/125/56-434 |
| Operating Temperature | -55 to +150°C | -55 to +150°C | -55 to +150°C | -55 to +150°C | -55 to +150°C |
| Tolerance on Rn (25°C) | 330Ω to 1MΩ : $\pm 3^*$, 5, 10, 20% 1500Ω to 150 kΩ : $\pm 3\%$ | $\pm 3^*$, 5, 10, $\pm 20\%$ | $\pm 3^*$, 5, 10, $\pm 20\%$ | $\pm 2, 3, 5, \pm 10\%$ | $\pm 2, 3, 5, \pm 10\%$ |
| Maximum dissipation at 25°C | 0.25 W | 0.71 W | 0.9 W | 0.69 W | 0.85 W |
| Thermal dissipation factor | 5 mW/°C | 7.1 mW/°C | 9 mW/°C | 6.9 mW/°C | 8.5 mW/°C |
| Thermal time constant | 10 s | 22 s | 30 s | 18 s | 30 s |
| Response time | < 3s | | | | |

STANDARDIZATION

NV range : approved by NFC 93271
Type: TN115 A for NV06
TN116 for NV09
List: GAM-T1
List: LNZ

OPTIONS

Consult factory for availability of options:

- other nominal resistance values
- other tolerances
- alternative lead materials or lengths
- controlled dimensions

* Optional tolerance, please contact factory

NTC DISC THERMISTORS

ND/NE 03



HOW TO ORDER

ND06

Type

ND03
NE03
ND06
NE06
NV06

ND09
NE09
NV09

P0

Material Code

P
(See tables
page 23-25)

0103

Resistance

10 kΩ
(See tables
page 22-24)

K

Tolerance

G (±2%) for NV
H (±3%)*
J (±5%)
K (±10%)
M (±20%)

--

Packaging


--: Bulk
Ammopack
(See table page 26)
Tape and reel
(See table page 26)

* Optional tolerance, please contact factory

TABLE OF VALUES

ND03/NE03 TYPE

ND03/NE03



| Part Number | Rn at 25°C (Ω) | Material Code | B (K) (B/B (1) ± 5% (2) ± 3%) | α at 25°C (%/°C) |
|--------------------------|--------------------|---------------|-------------------------------------|------------------|
| N_03J00681 N_03J00102 | 680 1,000 | J | 3480 (2) | - 3.9 |
| N_03K00152 N_03K00222 | 1,500 2,200 | K | 3630 (2) | - 4.0 |
| N_03L00272 N_03L00332 | 2,700 3,300 | L | 3790 (2) | - 4.2 |
| N_03M00472 N_03M00682 | 4,700 6,800 | M | 3950 (2) | - 4.4 |
| N_03N00103 N_03N00153 | 10,000 15,000 | N | 4080 (2) | - 4.6 |
| N_03P00223 N_03P00333 | 22,000 33,000 | P | 4220 (2) | - 4.7 |
| N_03Q00473 N_03Q00683 | 47,000 68,000 | Q | 4300 (2) | - 4.7 |
| N_03R00104 N_03R00154 | 100,000 150,000 | R | 4400 (2) | - 4.8 |
| N_03S00224 | 220,000 | S | 4520 (2) | - 5.0 |
| N_03T00334 N_03T00474 | 330,000 470,000 | T | 4630 (2) | - 5.1 |
| N_03U00105 | 1,000,000 | U | 4840 (2) | - 5.3 |



The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.


NTC DISC THERMISTORS

ND/NE/NV 06



TABLE OF VALUES

ND06/NE06/NV06

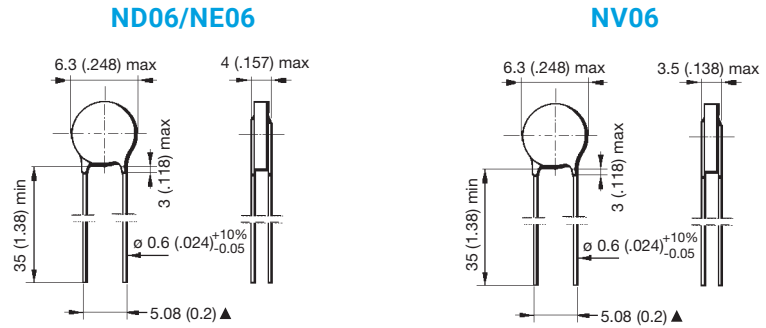

| Part Number | Rn at 25°C (Ω) | Material Code | B (K) (B/B (1) ± 5% (2) ± 3%) | α at 25°C (%/°C) |
|-------------|----------------|---------------|-------------------------------------|------------------|
| N_06J00151 | 150 | J | 3480 (2) | - 3.9 |
| N_06J00221 | 220 | | | |
| N_06K00331 | 330 | K | 3630 (2) | - 4.0 |
| N_06K00471 | 470 | | | |
| N_06L00681 | 680 | L | 3790 (2) | - 4.2 |
| N_06L00102 | 1,000 | | | |
| N_06M00152 | 1,500 | M | 3950 (2) | - 4.4 |
| N_06N00222 | 2,200 | N | 4080 (2) | - 4.6 |
| N_06N00332 | 3,300 | | | |
| N_06P00472 | 4,700 | P | 4220 (2) | - 4.7 |
| N_06P00682 | 6,800 | | | |
| N_06P00103 | 10,000 | | | |
| N_06Q00153 | 15,000 | Q | 4300 (2) | - 4.7 |
| N_06Q00223 | 22,000 | | | |
| N_06R00333 | 33,000 | R | 4400 (2) | - 4.8 |
| N_06S00473 | 47,000 | S | 4520 (2) | - 5.0 |
| N_06S00683 | 68,000 | | | |
| N_06T00104 | 100,000 | T | 4630 (2) | - 5.1 |
| N_06U00154 | 150,000 | U | 4840 (2) | - 5.3 |
| N_06U00224 | 220,000 | | | |
| N_06U00334 | 330,000 | | | |

For other resistance values, please consult us.


NTC DISC THERMISTORS

ND/NE/NV 09



TABLE OF VALUES

ND09/NE09/NV09

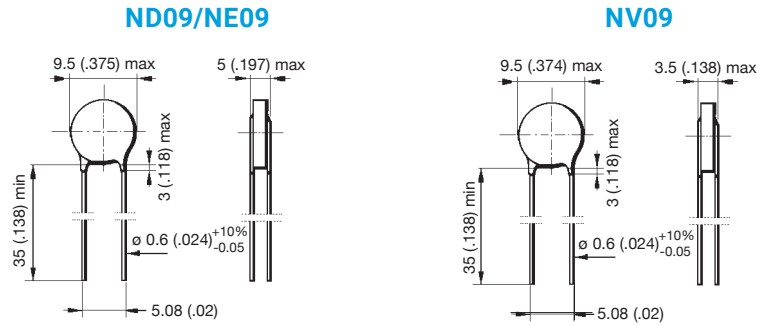

| Part Number | Rn at 25°C (Ω) | Material Code | B (K) (⁽¹⁾ ± 5% ⁽²⁾ ± 3%) | α at 25°C (%/°C) |
|--|------------------------------|---------------|--|------------------|
| N_09J00680 N_09J00101 | 68 100 | J | 3480 (2) | - 3.9 |
| N_09K00151 N_09K00221 | 150 220 | K | 3630 (2) | - 4.0 |
| N_09L00331 | 330 | L | 3790 (2) | - 4.2 |
| N_09M00471 N_09M00681 | 470 680 | M | 3950 (2) | - 4.4 |
| N_09N00102 N_09N00152 | 1,000 1,500 | N | 4080 (2) | - 4.6 |
| N_09P00222 N_09P00332 | 2,200 3,300 | P | 4220 (2) | - 4.7 |
| N_09Q00472 N_09Q00682 | 4,700 6,800 | Q | 4300 (2) | - 4.7 |
| N_09R00103 N_09R00153 | 10,000 15,000 | R | 4400 (2) | - 4.8 |
| N_09S00223 | 22,000 | S | 4520 (2) | - 5.0 |
| N_09T00333 N_09T00473 | 33,000 47,000 | T | 4630 (2) | - 5.1 |
| N_09U00683 N_09U00104 N_09U00154 | 68,000 100,000 150,000 | U | 4840 (2) | - 5.3 |



NTC DISC THERMISTORS

Packaging for Automatic Insertion



PACKAGING AND KINK SUFFIXES

Tables below indicate the suffixes to specify when ordering to get the required kink and packaging. For devices on tape, it is necessary to specify the height (H or Ho) which is the distance between the tape axis (sprocket holes axis) and the seating plane on the printed circuit board. The following types can be ordered on tape either in AMMOPACK (fan folder) or on REEL in accordance with IEC 286-2.

– **Straight leads:**

H represents the distance between the sprocket holes axis and the bottom plane of component body (base of resin or base of stand off).

– **Kinked leads and flat leads:**

Ho represents the distance between the sprocket holes axis and the base on the knee (kinked leads) or the bottom of the flat part (flat leads).


• Reel & Ammopack

millimeters (inches)

| Types | Suffix | H or Ho | Leads | Quantity/Size | Packaging |
|-----------------|--------|-------------------------------|----------|---------------|-----------|
| ND/NE 03 & NJ28 | CA | 16 ± 0.5 (0.630 ± 0.020) | Straight | 3000 | AMMOPACK |
| | CB | 16 ± 0.5 (0.630 ± 0.020) | Straight | 3000 | REEL |
| | CC | 19.5 ± 0.5 (0.768 ± 0.020) | Straight | 3000 | AMMOPACK |
| | CD | 19.5 ± 0.5 (0.768 ± 0.020) | Straight | 3000 | REEL |
| NP30 | CA | 16 ± 0.5 (0.630 ± 0.020) | Straight | 2000 | AMMOPACK |
| | CB | 16 ± 0.5 (0.630 ± 0.020) | Straight | 2000 | REEL |
| | CC | 19.5 ± 0.5 (0.768 ± 0.020) | Straight | 2000 | AMMOPACK |
| | CD | 19.5 ± 0.5 (0.768 ± 0.020) | Straight | 2000 | REEL |
| ND/NE/NV 06/09 | DA | 16 ± 0.5 (0.630 ± 0.020) | Straight | 1500 | AMMOPACK |
| | DB | 16 ± 0.5 (0.630 ± 0.020) | Straight | 1500 | REEL |
| | DC | 19.5 ± 0.5 (0.768 ± 0.020) | Straight | 1500 | AMMOPACK |
| | DD | 19.5 ± 0.5 (0.768 ± 0.020) | Straight | 1500 | REEL |
| | DL | 16 ± 0.5 (0.630 ± 0.020) | Kinked | 1500 | AMMOPACK |
| | DM | 16 ± 0.5 (0.630 ± 0.020) | Kinked | 1500 | REEL |
| | DN | 19.5 ± 0.5 (0.768 ± 0.020) | Kinked | 1500 | AMMOPACK |
| | DP | 19.5 ± 0.5 (0.768 ± 0.020) | Kinked | 1500 | REEL |


NTC

Type
ND03
NE03
NJ28
NP30



NTC

Types
ND/NE/NV
06/09





• Bulk

| Type | Quantity/box |
|------------------------------|--------------|
| ND/NE03 | 3000 |
| ND/NE06 | 1500 |
| ND/NE09 | 1500 |
| NV06 | 100 |
| NV09 | 100 |
| NI24 NJ28 NK20 NP30 | 1000 |

ND03 / NE03
NJ28 / NP30

ND/NE/NV
06/09



AUTOMATIC INSERTION

NTC Disc Thermistors





TAPING CHARACTERISTICS

Missing components

A maximum of 3 consecutive components may be missing from the bandolier, surrounded by at least 6 filled positions. The number of missing components may not exceed 0.5% of the total per packing module.

The beginning and the end of tape exhibit 8 or 9 blank positions.

DIMENSIONS: millimeters (inches)

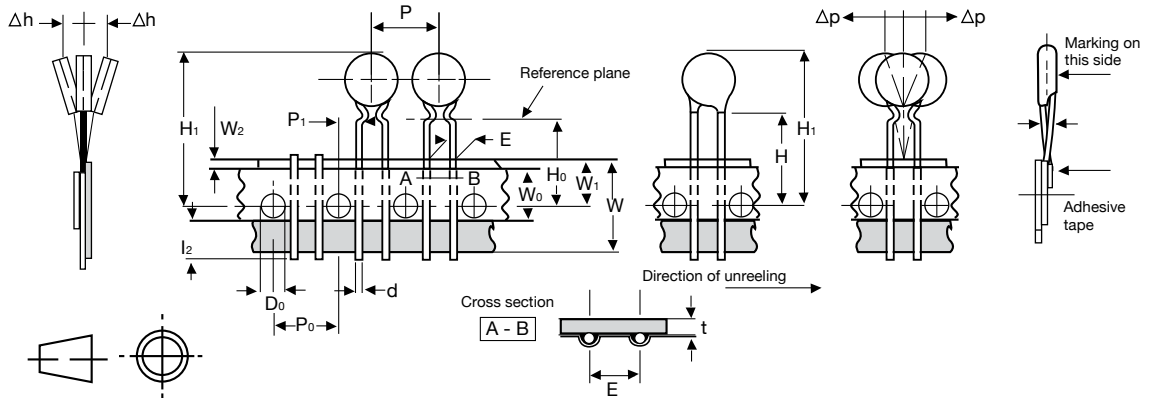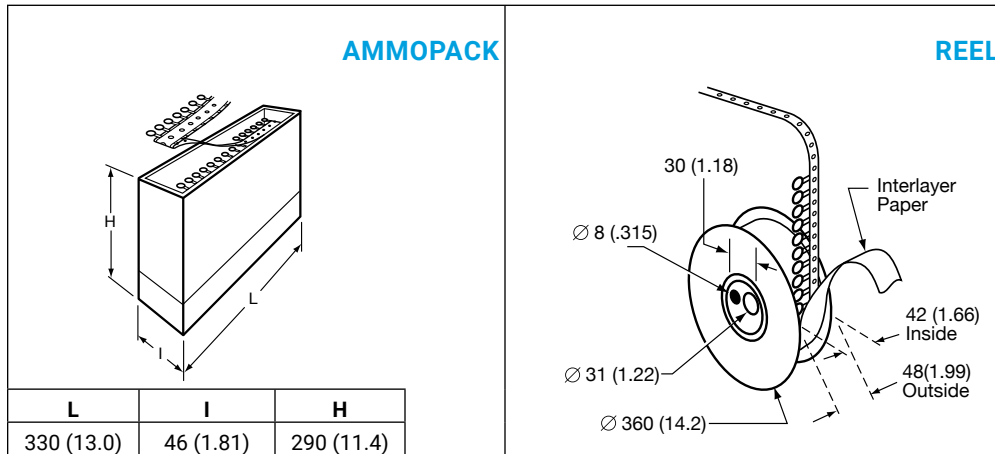

| Value | Tolerance | Dimensions Characteristics |
|---------|--------------|--|
| 18 | +1 / -0.5 | W Leading tape width |
| 6 | ±0.3 | W ₀ Adhesive tape width |
| 9 | +0.75 / -0.5 | W ₁ Sprocket hole position |
| 3 max. | | W ₂ Distance between the top of the tape and the adhesive |
| 4 | ±0.2 | D ₀ Diameter of sprocket hole |
| 16/19.5 | ±0.5 | H ₀ Distance between the tape axis and the seating plane of the component |
| | | H ₁ Distance between the tape axis and the top of component body |

| Value | Tolerance | Dimensions Characteristics |
|-------------|--------------|--|
| 12.7 | ±0.2 | P ₀ Sprocket holes pitch |
| 254 | ±1 | - Distance between 21 consecutive holes 20 pitches |
| 0.7 | ±0.2 | t Total thickness of tape |
| 2.54 5.08 | +0.6 -0.1 | E Lead spacing |
| 5.08 3.85 | ± 0.7 | P ₁ Distance between the sprocket hole axis and the lead axis |
| 12.7 | ±1.0 | P Spacing of components |
| 0.5 0.6 | ±5% | d Lead diameter |
| 0 | ±1.3 | ³ P Verticality of components |
| 0 | ±2 | ³ h Alignment of components |



The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

This type of product is widely used in automotive and consumer applications. They are assembled in custom-probes for sensing the temperature of liquids (water, oil, ...), gases or surface of any other component. The metallization covers completely the surfaces of the thermistor. The particularly flat and smooth surfaces ensure an excellent electrical and thermal contact under pressure.

| Types | NR |
|----------------------------|---|
| Physical data (dim. in mm) | |
| Marking | On package only / On parts upon request |
| Operating temperature | -40°C to +200°C |
| Values and tolerances | Custom - designed products defined with: $D \pm D \quad R_1 \pm R_1/R_1 \text{ at } T_1$ $E \pm E \quad R_2 \pm R_2/R_2 \text{ at } T_2, \dots$ |

DESIGN OF THE THERMISTOR

Choice of the resistances

If the application is to measure the temperature around a defined point, a unique nominal resistance can be chosen (for example, among standard values of the ND range products presented on pages 20 to 24).

When it is required to measure the temperature over selected ranges $T_1 - T_2$, $T_2 - T_3$, ..., the corresponding resistance R_1 , R_2 , R_3 , ..., must be such that they can be located on the R (T) characteristic of an existing NTC material (for example among standard materials whose R (T) are displayed on pages 29 to 33).

The resistances must also be compatible with the resistivity of the material and the dimensions of the thermistor.

Choice of the tolerances

The precision of the temperature measurement determines the calculation of the tolerance on the resistance:

$$\Delta R/R = \alpha (\%/^{\circ}\text{C}) \cdot \Delta T (^{\circ}\text{C})$$

For example, the NTC NR55-3049-99, using "N5" material (R (T) characteristic displayed on page 31), requires a precision of 1°C over the temperature range 110°C - 120°C.

The tolerances can be calculated:

$$\Delta R_{110^{\circ}\text{C}} / R_{110^{\circ}\text{C}} = 1^{\circ}\text{C} \cdot 2.91\%/^{\circ}\text{C} = 2.91\%$$

$$\Delta R_{120^{\circ}\text{C}} / R_{120^{\circ}\text{C}} = 1^{\circ}\text{C} \cdot 2.76\%/^{\circ}\text{C} = 2.76\%$$

*For your specific requirements, please consult us.

HOW TO ORDER

NR55 - - **3002** - 99

| |

| |

| |

Type P/N Code

NTC LEADLESS DISC THERMISTORS



We present below some examples of our custom - designed products as an illustration of the different ways to define products.

DIMENSIONS: millimeters (inches)

| Types | D | E | Material Code | B (k) | $R_1 \pm \Delta R_1$ at T_1 | T_1 (°C) | $R_2 \pm \Delta R_2$ at T_2 | T_2 (°C) | $R_3 \pm \Delta R_3$ at T_3 | T_3 (°C) |
|-------------------|-------------------------|-------------------------|---------------|-------|-------------------------------|------------|-------------------------------|------------|-------------------------------|------------|
| NR 55 - 3002 - 99 | 5.5 (.217) ± 0.5 (.020) | 1.1 (.043) ± 0.4 (.016) | N5 | 4160 | 1230 Ω ± 7.5% | 40 | 160 Ω ± 5% | 96.5 | - | - |
| NR 67 - 3068 - 99 | 6.7 (.264) ± 0.5 (.020) | 1.7 (.067) ± 0.3 (.012) | N | 4080 | 150 Ω ± 3.3% | 100 | 51 Ω ± 5.3% | 140 | - | - |
| NR 55 - 3049 - 99 | 5.5 (.217) ± 0.5 (.020) | 1.0 (.040) ± 0.2 (.008) | N5 | 4160 | 107 Ω ± 2.9% | 110 | 80.6 Ω ± 2.8% | 120 | - | - |
| NR 55 - 3046 - 99 | 5.5 (.217) ± 0.5 (.020) | 1.3 (.051) ± 0.4 (.016) | S | 4520 | 48600 Ω ± 7.5% | 25 | 3210 Ω ± 5% | 90 | - | - |
| NR 49 - 3119 - 99 | 4.9 (.193) ± 0.3 (.012) | 1.5 (.060) ± 0.4 (.016) | M | 3950 | 840 Ω ± 10% | 37.8 | 84 Ω ± 5% | 104.4 | - | - |
| NR 55 - 3114 - 99 | 5.5 (.217) ± 0.4 (.016) | 1.0 (.040) ± 0.2 (.008) | P | 4220 | 5000 Ω ± 10% | 25 | - | - | - | - |
| NR 70 - 3121 - 99 | 7.0 (.275) ± 0.3 (.012) | 1.2 (.047) ± 0.2 (.008) | L | 3790 | 210 Ω ± 10% | 40 | 40 Ω ± 7.5% | 90 | 30 Ω ± 6.7% | 100 |
| NR 29 - 3107 - 99 | 2.9 (.014) ± 0.3 (.012) | 1.7 (.067) ± 0.3 (.012) | K | 3630 | 2050 Ω ± 6% | 25 | 193 Ω ± 5.4% | 96.5 | - | - |
| NR 55 - 3122 - 99 | 5.5 (.217) ± 0.5 (.020) | 1.5 (.060) ± 0.4 (.016) | J | 3480 | 210 Ω ± 5% | 25 | - | - | - | - |
| NR 55 - 3126 - 99 | 5.5 (.217) ± 0.5 (.020) | 1.0 (.040) ± 0.2 (.008) | P | 4220 | 3340 Ω ± 10% | 25 | 264 Ω ± 7% | 90 | 107 Ω ± 7% | 120 |
| NR 47 - 3116 - 99 | 4.7 (.185) ± 0.4 (.016) | 1.2 (.047) ± 0.2 (.008) | R | 4400 | 33000 Ω ± 2% | 25 | - | - | - | - |
| NR 49 - 3113 - 99 | 4.9 (.193) ± 0.3 (.012) | 1.2 (.047) ± 0.2 (.008) | N | 4080 | 1680 Ω ± 10% | 40 | 382 Ω ± 6.7% | 80 | 176 Ω ± 5% | 105 |
| NR 47 - 3101 - 99 | 4.6 (.181) ± 0.3 (.012) | 1.4 (.055) ± 0.3 (.012) | J | 3480 | 146 Ω ± 13% | 40 | 22 Ω ± 10% | 100 | - | - |
| NR 55 - 3071 - 99 | 5.8 (.228) ± 0.3 (.012) | 1.0 (.040) ± 0.2 (.008) | L | 3790 | 262 Ω ± 8.7% | 40 | 120 Ω ± 10% | 60 | 35.5 Ω ± 7.8% | 100 |
| NR 61 - 3063 - 99 | 6.1 (.240) ± 0.3 (.012) | 1.5 (.060) ± 0.3 (.012) | N | 4080 | 760 Ω ± 9.2% | 50 | 130 Ω ± 8.5% | 100 | 56.6 Ω ± 8.5% | 130 |
| NR 67 - 3053 - 99 | 6.7 (.264) ± 0.4 (.016) | 1.7 (.067) ± 0.3 (.012) | N | 4080 | 540 Ω ± 11% | 60 | 144 Ω ± 7% | 100 | - | - |
| NR 50 - 3048 - 99 | 5.0 (.197) ± 0.5 (.020) | 1.5 (.060) ± 0.5 (.020) | J | 3480 | 233 Ω ± 10% | 25 | 13.3 Ω ± 7% | 121 | - | - |
| NR 60 - 3021 - 99 | 6.0 (.236) ± 0.5 (.020) | 3.2 (.125) ± 0.3 (.012) | P | 4220 | 3640 Ω ± 3% | 40 | 457 Ω ± 3% | 96.5 | - | - |
| NR 55 - 3016 - 99 | 5.5 (.217) ± 0.5 (.020) | 1.1 (.043) ± 0.4 (.016) | Q | 4300 | 5500 Ω ± 9% | 40 | 650 Ω ± 7.7% | 96.5 | - | - |

Resistance - Temperature characteristics: pages 29 to 33.



TABLES OF RESISTANCE VS TEMPERATURE



| T (°C) | Material B(K) | | |
|-----------|---------------|--------|----------|
| | I 3250 | | |
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 42.35 | 21.9 | -5.98 |
| -50 | 31.48 | 20.0 | -5.78 |
| -45 | 23.63 | 18.1 | -5.59 |
| -40 | 17.91 | 16.3 | -5.41 |
| -35 | 13.70 | 14.6 | -5.23 |
| -30 | 10.58 | 13.1 | -5.06 |
| -25 | 8.232 | 11.6 | -4.90 |
| -20 | 6.460 | 10.1 | -4.74 |
| -15 | 5.110 | 8.8 | -4.59 |
| -10 | 4.072 | 7.5 | -4.45 |
| -5 | 3.268 | 6.3 | -4.31 |
| 0 | 2.641 | 5.1 | -4.18 |
| 5 | 2.148 | 4.0 | -4.05 |
| 10 | 1.759 | 2.9 | -3.92 |
| 15 | 1.449 | 1.9 | -3.81 |
| 20 | 1.200 | 0.9 | -3.69 |
| 25 | 1.000 | 0.0 | -3.58 |
| 30 | 0.8377 | 0.9 | -3.48 |
| 35 | 0.7054 | 1.8 | -3.38 |
| 40 | 0.5969 | 2.6 | -3.28 |
| 45 | 0.5076 | 3.5 | -3.19 |
| 50 | 0.4336 | 4.3 | -3.10 |
| 55 | 0.3720 | 5.1 | -3.01 |
| 60 | 0.3206 | 5.9 | -2.93 |
| 65 | 0.2774 | 6.6 | -2.85 |
| 70 | 0.2410 | 7.4 | -2.77 |
| 75 | 0.2102 | 8.1 | -2.70 |
| 80 | 0.1839 | 8.8 | -2.63 |
| 85 | 0.1616 | 9.5 | -2.56 |
| 90 | 0.1424 | 10.2 | -2.49 |
| 95 | 0.1259 | 10.9 | -2.43 |
| 100 | 0.1117 | 11.5 | -2.36 |
| 105 | 0.09938 | 12.2 | -2.30 |
| 110 | 0.08869 | 12.8 | -2.25 |
| 115 | 0.07938 | 13.4 | -2.19 |
| 120 | 0.07124 | 14.0 | -2.14 |
| 125 | 0.06410 | 14.6 | -2.08 |
| 130 | 0.05783 | 15.2 | -2.03 |
| 135 | 0.05230 | 15.7 | -1.98 |
| 140 | 0.04741 | 16.3 | -1.94 |
| 145 | 0.04308 | 16.8 | -1.89 |
| 150 | 0.03924 | 17.4 | -1.85 |

| T (°C) | Material B(K) | | |
|-----------|---------------|--------|----------|
| | J-J5 3480 | | |
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 51.75 | 20.5 | -6.23 |
| -50 | 37.98 | 17.7 | -6.03 |
| -45 | 28.15 | 15.2 | -5.84 |
| -40 | 21.07 | 13.0 | -5.65 |
| -35 | 15.91 | 11.0 | -5.48 |
| -30 | 12.13 | 9.3 | -5.31 |
| -25 | 9.321 | 7.8 | -5.15 |
| -20 | 7.222 | 6.4 | -4.99 |
| -15 | 5.640 | 5.2 | -4.84 |
| -10 | 4.438 | 4.2 | -4.69 |
| -5 | 3.517 | 3.3 | -4.55 |
| 0 | 2.807 | 2.5 | -4.42 |
| 5 | 2.255 | 1.8 | -4.29 |
| 10 | 1.824 | 1.2 | -4.17 |
| 15 | 1.484 | 0.7 | -4.05 |
| 20 | 1.215 | 0.3 | -3.93 |
| 25 | 1.0000 | 0.0 | -3.82 |
| 30 | 0.8278 | 0.3 | -3.71 |
| 35 | 0.6889 | 0.7 | -3.61 |
| 40 | 0.5763 | 1.1 | -3.51 |
| 45 | 0.4845 | 1.5 | -3.41 |
| 50 | 0.4092 | 2.0 | -3.32 |
| 55 | 0.3472 | 2.5 | -3.23 |
| 60 | 0.2960 | 3.0 | -3.15 |
| 65 | 0.2533 | 3.5 | -3.06 |
| 70 | 0.2177 | 4.1 | -2.98 |
| 75 | 0.1879 | 4.7 | -2.90 |
| 80 | 0.1628 | 5.3 | -2.83 |
| 85 | 0.1415 | 5.9 | -2.76 |
| 90 | 0.12349 | 6.5 | -2.69 |
| 95 | 0.10813 | 7.1 | -2.62 |
| 100 | 0.09499 | 7.7 | -2.55 |
| 105 | 0.08372 | 8.4 | -2.49 |
| 110 | 0.07402 | 9.0 | -2.43 |
| 115 | 0.06564 | 9.7 | -2.37 |
| 120 | 0.05837 | 10.3 | -2.31 |
| 125 | 0.05206 | 11.0 | -2.26 |
| 130 | 0.04656 | 11.6 | -2.21 |
| 135 | 0.04175 | 12.3 | -2.15 |
| 140 | 0.03753 | 13.0 | -2.10 |
| 145 | 0.03382 | 13.6 | -2.06 |
| 150 | 0.03055 | 14.3 | -2.01 |

| T (°C) | Material B(K) | | |
|-----------|---------------|--------|----------|
| | K 3630 | | |
| | R(T) / R25 | TF (%) | α (%/°C) |
| 1.4 pt | 56.27 | 21.4 | -6.25 |
| -50 | 41.22 | 18.5 | -6.06 |
| -45 | 30.48 | 15.9 | -5.89 |
| -40 | 22.74 | 13.6 | -5.71 |
| -35 | 17.11 | 11.5 | -5.55 |
| -30 | 12.98 | 9.7 | -5.39 |
| -25 | 9.931 | 8.1 | -5.24 |
| -20 | 7.655 | 6.7 | -5.09 |
| -15 | 5.945 | 5.4 | -4.95 |
| -10 | 4.651 | 4.4 | -4.81 |
| -5 | 3.663 | 3.4 | -4.67 |
| 0 | 2.905 | 2.6 | -4.54 |
| 5 | 2.319 | 1.9 | -4.42 |
| 10 | 1.862 | 1.3 | -4.30 |
| 15 | 1.505 | 0.8 | -4.18 |
| 20 | 1.223 | 0.3 | -4.07 |
| 25 | 1.0000 | 0.0 | -3.96 |
| 30 | 0.8219 | 0.3 | -3.85 |
| 35 | 0.6792 | 0.7 | -3.75 |
| 40 | 0.5641 | 1.1 | -3.65 |
| 45 | 0.4708 | 1.6 | -3.55 |
| 50 | 0.3949 | 2.1 | -3.46 |
| 55 | 0.3327 | 2.6 | -3.37 |
| 60 | 0.2816 | 3.1 | -3.28 |
| 65 | 0.2393 | 3.7 | -3.20 |
| 70 | 0.2043 | 4.3 | -3.12 |
| 75 | 0.1751 | 4.9 | -3.04 |
| 80 | 0.1506 | 5.5 | -2.96 |
| 85 | 0.1301 | 6.1 | -2.89 |
| 90 | 0.1128 | 6.8 | -2.82 |
| 95 | 0.09811 | 7.4 | -2.75 |
| 100 | 0.08564 | 8.1 | -2.68 |
| 105 | 0.07501 | 8.7 | -2.61 |
| 110 | 0.06591 | 9.4 | -2.55 |
| 115 | 0.05809 | 10.1 | -2.49 |
| 120 | 0.05136 | 10.8 | -2.43 |
| 125 | 0.04554 | 11.5 | -2.37 |
| 130 | 0.04049 | 12.2 | -2.32 |
| 135 | 0.03611 | 12.8 | -2.26 |
| 140 | 0.03228 | 13.5 | -2.21 |
| 145 | 0.02893 | 14.2 | -2.16 |
| 150 | 0.02600 | 14.9 | -2.11 |

| T (°C) | Material B(K) | | |
|-----------|---------------|--------|----------|
| | KA 3625 | | |
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 61.22 | 7.1 | -6.55 |
| -50 | 44.25 | 6.1 | -6.33 |
| -45 | 32.34 | 5.3 | -6.12 |
| -40 | 23.88 | 4.5 | -5.92 |
| -35 | 17.81 | 3.8 | -5.73 |
| -30 | 13.41 | 3.2 | -5.54 |
| -25 | 10.19 | 2.7 | -5.37 |
| -20 | 7.815 | 2.2 | -5.20 |
| -15 | 6.041 | 1.8 | -5.04 |
| -10 | 4.707 | 1.5 | -4.89 |
| -5 | 3.696 | 1.1 | -4.74 |
| 0 | 2.923 | 0.9 | -4.60 |
| 5 | 2.329 | 0.6 | -4.46 |
| 10 | 1.867 | 0.4 | -4.33 |
| 15 | 1.507 | 0.3 | -4.21 |
| 20 | 1.224 | 0.1 | -4.09 |
| 25 | 1.0000 | 0.0 | -3.97 |
| 30 | 0.8217 | 0.1 | -3.86 |
| 35 | 0.6788 | 0.2 | -3.75 |
| 40 | 0.5638 | 0.4 | -3.65 |
| 45 | 0.4707 | 0.5 | -3.55 |
| 50 | 0.3948 | 0.7 | -3.46 |
| 55 | 0.3328 | 0.9 | -3.37 |
| 60 | 0.2817 | 1.0 | -3.28 |
| 65 | 0.2396 | 1.2 | -3.19 |
| 70 | 0.2046 | 1.4 | -3.11 |
| 75 | 0.1754 | 1.6 | -3.03 |
| 80 | 0.1510 | 1.8 | -2.96 |
| 85 | 0.1305 | 2.0 | -2.88 |
| 90 | 0.1131 | 2.3 | -2.81 |
| 95 | 0.09844 | 2.5 | -2.74 |
| 100 | 0.08596 | 2.7 | -2.68 |
| 105 | 0.07530 | 2.9 | -2.61 |
| 110 | 0.06618 | 3.1 | -2.55 |
| 115 | 0.05833 | 3.4 | -2.49 |
| 120 | 0.05157 | 3.6 | -2.43 |
| 125 | 0.04573 | 3.8 | -2.38 |
| 130 | 0.04065 | 4.0 | -2.32 |
| 135 | 0.03624 | 4.3 | -2.27 |
| 140 | 0.03239 | 4.5 | -2.22 |
| 145 | 0.02902 | 4.7 | -2.17 |
| 150 | 0.02607 | 5.0 | -2.12 |

| T (°C) | Material B(K) | | |
|-----------|---------------|--------|----------|
| | KC 3470 | | |
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 60.08 | 34.0 | -7.00 |
| -50 | 43.19 | 29.4 | -6.71 |
| -45 | 31.42 | 25.3 | -6.44 |
| -40 | 23.13 | 21.6 | -6.18 |
| -35 | 17.22 | 18.4 | -5.94 |
| -30 | 12.95 | 15.5 | -5.71 |
| -25 | 9.842 | 12.9 | -5.49 |
| -20 | 7.550 | 10.7 | -5.29 |
| -15 | 5.845 | 8.7 | -5.10 |
| -10 | 4.564 | 6.9 | -4.91 |
| -5 | 3.594 | 5.4 | -4.74 |
| 0 | 2.853 | 4.1 | -4.58 |
| 5 | 2.281 | 3.0 | -4.42 |
| 10 | 1.838 | 2.0 | -4.27 |
| 15 | 1.491 | 1.2 | -4.13 |
| 20 | 1.217 | 0.5 | -4.00 |
| 25 | 1.0000 | 0.0 | -3.90 |
| 30 | 0.8267 | 0.5 | -3.74 |
| 35 | 0.6873 | 1.1 | -3.63 |
| 40 | 0.5747 | 1.8 | -3.52 |
| 45 | 0.4830 | 2.5 | -3.41 |
| 50 | 0.4081 | 3.3 | -3.31 |
| 55 | 0.3465 | 4.1 | -3.21 |
| 60 | 0.2955 | 5.0 | -3.12 |
| 65 | 0.2532 | 5.9 | -3.03 |
| 70 | 0.2179 | 6.8 | -2.94 |
| 75 | 0.1883 | 7.8 | -2.86 |
| 80 | 0.1634 | 8.7 | -2.78 |
| 85 | 0.1423 | 9.7 | -2.71 |
| 90 | 0.1244 | 10.8 | -2.63 |
| 95 | 0.10915 | 11.8 | -2.56 |
| 100 | 0.09608 | 12.9 | -2.50 |
| 105 | 0.08486 | 13.9 | -2.43 |
| 110 | 0.07519 | 15.0 | -2.37 |
| 115 | 0.06683 | 16.1 | -2.31 |
| 120 | 0.05957 | 17.2 | -2.25 |
| 125 | 0.05325 | 18.3 | -2.20 |
| 130 | 0.04774 | 19.4 | -2.14 |
| 135 | 0.04290 | 20.5 | -2.09 |
| 140 | 0.03866 | 21.6 | -2.04 |
| 145 | 0.03492 | 22.7 | -1.99 |
| 150 | 0.03162 | 23.8 | -1.95 |

| T (°C) | Material B(K) | | |
|-----------|---------------|--------|----------|
| | L0 3790 | | |
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 82.54 | 22.3 | -7.12 |
| -50 | 58.03 | 19.3 | -6.87 |
| -45 | 41.31 | 16.6 | -6.63 |
| -40 | 29.75 | 14.2 | -6.40 |
| -35 | 21.68 | 12.0 | -6.18 |
| -30 | 15.97 | 10.1 | -5.98 |
| -25 | 11.88 | 8.5 | -5.78 |
| -20 | 8.931 | 7.0 | -5.59 |
| -15 | 6.777 | 5.7 | -5.40 |
| -10 | 5.188 | 4.5 | -5.23 |
| -5 | 4.007 | 3.6 | -5.06 |
| 0 | 3.120 | 2.7 | -4.90 |
| 5 | 2.449 | 2.0 | -4.75 |
| 10 | 1.937 | 1.3 | -4.60 |
| 15 | 1.543 | 0.8 | -4.46 |
| 20 | 1.238 | 0.4 | -4.33 |
| 25 | 1.0000 | 0.0 | -4.20 |
| 30 | 0.8128 | 0.3 | -4.07 |
| 35 | 0.6648 | 0.7 | -3.95 |
| 40 | 0.5469 | 1.2 | -3.84 |
| 45 | 0.4525 | 1.6 | -3.73 |
| 50 | 0.3764 | 2.2 | -3.62 |
| 55 | 0.3148 | 2.7 | -3.52 |
| 60 | 0.2646 | 3.3 | -3.42 |
| 65 | 0.2235 | 3.8 | -3.33 |
| 70 | 0.1896 | 4.5 | -3.24 |
| 75 | 0.1616 | 5.1 | -3.15 |
| 80 | 0.1383 | 5.7 | -3.07 |
| 85 | 0.1189 | 6.4 | -2.98 |
| 90 | 0.1026 | 7.1 | -2.91 |
| 95 | 0.08888 | 7.7 | -2.83 |
| 100 | 0.07728 | 8.4 | -2.76 |
| 105 | 0.06744 | 9.1 | -2.69 |
| 110 | 0.05905 | 9.8 | -2.62 |
| 115 | 0.05188 | 10.5 | -2.56 |
| 120 | 0.04572 | 11.3 | -2.49 |
| 125 | 0.04042 | 12.0 | -2.43 |
| 130 | 0.03585 | 12.7 | -2.37 |
| 135 | 0.03188 | 13.4 | -2.32 |
| 140 | 0.02843 | 14.1 | -2.26 |
| 145 | 0.02542 | 14.8 | -2.21 |
| 150 | 0.02279 | 15.6 | -2.16 |



TABLES OF RESISTANCE VS TEMPERATURE



| T (°C) | Material B(K) | | |
|-----------|---------------|--------|----------|
| | L2 3805 | | |
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 62.45 | 22.4 | -6.41 |
| -50 | 45.40 | 19.3 | -6.22 |
| -45 | 33.33 | 16.6 | -6.03 |
| -40 | 24.70 | 14.2 | -5.85 |
| -35 | 18.47 | 12.1 | -5.68 |
| -30 | 13.92 | 10.2 | -5.52 |
| -25 | 10.58 | 8.5 | -5.36 |
| -20 | 8.110 | 7.0 | -5.21 |
| -15 | 6.260 | 5.7 | -5.07 |
| -10 | 4.867 | 4.6 | -4.93 |
| -5 | 3.810 | 3.6 | -4.80 |
| 0 | 3.003 | 2.7 | -4.67 |
| 5 | 2.382 | 2.0 | -4.55 |
| 10 | 1.901 | 1.3 | -4.43 |
| 15 | 1.526 | 0.8 | -4.31 |
| 20 | 1.232 | 0.4 | -4.20 |
| 25 | 1.0000 | 0.0 | -4.10 |
| 30 | 0.8161 | 0.3 | -4.00 |
| 35 | 0.6694 | 0.7 | -3.90 |
| 40 | 0.5518 | 1.2 | -3.80 |
| 45 | 0.4570 | 1.7 | -3.71 |
| 50 | 0.3802 | 2.2 | -3.62 |
| 55 | 0.3178 | 2.7 | -3.53 |
| 60 | 0.2667 | 3.3 | -3.45 |
| 65 | 0.2248 | 3.9 | -3.37 |
| 70 | 0.1902 | 4.5 | -3.29 |
| 75 | 0.1615 | 5.1 | -3.22 |
| 80 | 0.1377 | 5.8 | -3.14 |
| 85 | 0.1179 | 6.4 | -3.07 |
| 90 | 0.1012 | 7.1 | -3.00 |
| 95 | 0.08721 | 7.8 | -2.94 |
| 100 | 0.07539 | 8.5 | -2.87 |
| 105 | 0.06538 | 9.2 | -2.81 |
| 110 | 0.05688 | 9.9 | -2.75 |
| 115 | 0.04963 | 10.6 | -2.69 |
| 120 | 0.04343 | 11.3 | -2.63 |
| 125 | 0.03812 | 12.0 | -2.58 |
| 130 | 0.03354 | 12.7 | -2.53 |
| 135 | 0.02960 | 13.5 | -2.47 |
| 140 | 0.02618 | 14.2 | -2.42 |
| 145 | 0.02322 | 14.9 | -2.37 |
| 150 | 0.02064 | 15.6 | -2.33 |

| T (°C) | Material B(K) | | |
|-----------|---------------|--------|----------|
| | M 3950 | | |
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 99.59 | 15.6 | -7.42 |
| -50 | 68.97 | 14.3 | -7.16 |
| -45 | 48.40 | 12.9 | -6.91 |
| -40 | 34.38 | 11.7 | -6.67 |
| -35 | 24.71 | 10.5 | -6.45 |
| -30 | 17.97 | 9.4 | -6.23 |
| -25 | 13.20 | 8.3 | -6.02 |
| -20 | 9.804 | 7.3 | -5.82 |
| -15 | 7.352 | 6.3 | -5.63 |
| -10 | 5.565 | 5.4 | -5.45 |
| -5 | 4.251 | 4.5 | -5.28 |
| 0 | 3.275 | 3.7 | -5.11 |
| 5 | 2.544 | 2.9 | -4.95 |
| 10 | 1.992 | 2.1 | -4.80 |
| 15 | 1.572 | 1.4 | -4.65 |
| 20 | 1.249 | 0.7 | -4.51 |
| 25 | 1.0000 | 0.0 | -4.38 |
| 30 | 0.8057 | 0.7 | -4.25 |
| 35 | 0.6534 | 1.3 | -4.12 |
| 40 | 0.5331 | 1.9 | -4.00 |
| 45 | 0.4376 | 2.5 | -3.89 |
| 50 | 0.3612 | 3.1 | -3.77 |
| 55 | 0.2998 | 3.7 | -3.67 |
| 60 | 0.2501 | 4.3 | -3.57 |
| 65 | 0.2097 | 4.8 | -3.47 |
| 70 | 0.1767 | 5.3 | -3.37 |
| 75 | 0.1496 | 5.9 | -3.28 |
| 80 | 0.1272 | 6.4 | -3.19 |
| 85 | 0.1087 | 6.9 | -3.11 |
| 90 | 0.09320 | 7.4 | -3.03 |
| 95 | 0.08025 | 7.8 | -2.95 |
| 100 | 0.06937 | 8.3 | -2.87 |
| 105 | 0.06019 | 8.8 | -2.80 |
| 110 | 0.05242 | 9.2 | -2.73 |
| 115 | 0.04580 | 9.6 | -2.66 |
| 120 | 0.04016 | 10.1 | -2.60 |
| 125 | 0.03532 | 10.5 | -2.53 |
| 130 | 0.03117 | 10.9 | -2.47 |
| 135 | 0.02758 | 11.3 | -2.41 |
| 140 | 0.02448 | 11.7 | -2.36 |
| 145 | 0.02179 | 12.1 | -2.30 |
| 150 | 0.01945 | 12.4 | -2.25 |

| T (°C) | Material B(K) | | |
|-----------|---------------|--------|----------|
| | MA 3965 | | |
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 101.09 | 2.47 | -7.49 |
| -50 | 69.81 | 2.26 | -7.22 |
| -45 | 48.87 | 2.06 | -6.96 |
| -40 | 34.65 | 1.87 | -6.71 |
| -35 | 24.87 | 1.69 | -6.48 |
| -30 | 18.06 | 1.52 | -6.26 |
| -25 | 13.259 | 1.35 | -6.05 |
| -20 | 9.837 | 1.19 | -5.84 |
| -15 | 7.372 | 1.04 | -5.65 |
| -10 | 5.578 | 0.89 | -5.47 |
| -5 | 4.259 | 0.75 | -5.29 |
| 0 | 3.280 | 0.61 | -5.12 |
| 5 | 2.548 | 0.48 | -4.96 |
| 10 | 1.994 | 0.35 | -4.81 |
| 15 | 1.573 | 0.23 | -4.66 |
| 20 | 1.250 | 0.11 | -4.52 |
| 25 | 1.0000 | 0.00 | -4.38 |
| 30 | 0.8054 | 0.11 | -4.25 |
| 35 | 0.6528 | 0.22 | -4.13 |
| 40 | 0.5324 | 0.32 | -4.01 |
| 45 | 0.4368 | 0.42 | -3.90 |
| 50 | 0.3603 | 0.52 | -3.79 |
| 55 | 0.2989 | 0.61 | -3.68 |
| 60 | 0.2492 | 0.70 | -3.58 |
| 65 | 0.2088 | 0.79 | -3.48 |
| 70 | 0.1758 | 0.88 | -3.39 |
| 75 | 0.1487 | 0.96 | -3.30 |
| 80 | 0.1263 | 1.04 | -3.21 |
| 85 | 0.1078 | 1.12 | -3.13 |
| 90 | 0.0923 | 1.20 | -3.05 |
| 95 | 0.0794 | 1.27 | -2.97 |
| 100 | 0.06857 | 1.35 | -2.90 |
| 105 | 0.05942 | 1.42 | -2.83 |
| 110 | 0.05167 | 1.49 | -2.76 |
| 115 | 0.04509 | 1.55 | -2.69 |
| 120 | 0.03948 | 1.62 | -2.62 |
| 125 | 0.03467 | 1.68 | -2.56 |
| 130 | 0.03055 | 1.75 | -2.50 |
| 135 | 0.02699 | 1.81 | -2.44 |
| 140 | 0.02392 | 1.87 | -2.39 |
| 145 | 0.02125 | 1.93 | -2.33 |
| 150 | 0.01894 | 1.98 | -2.28 |

| T (°C) | Material B(K) | | |
|-----------|---------------|--------|----------|
| | MC 3910 | | |
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 100.6 | 23.0 | -7.56 |
| -50 | 69.29 | 19.9 | -7.27 |
| -45 | 48.40 | 17.1 | -7.00 |
| -40 | 34.27 | 14.6 | -6.75 |
| -35 | 24.57 | 12.4 | -6.50 |
| -30 | 17.83 | 10.5 | -6.27 |
| -25 | 13.09 | 8.7 | -6.05 |
| -20 | 9.71 | 7.2 | -5.84 |
| -15 | 7.282 | 5.9 | -5.64 |
| -10 | 5.514 | 4.7 | -5.45 |
| -5 | 4.215 | 3.7 | -5.27 |
| 0 | 3.250 | 2.8 | -5.10 |
| 5 | 2.528 | 2.0 | -4.93 |
| 10 | 1.982 | 1.4 | -4.77 |
| 15 | 1.567 | 0.8 | -4.62 |
| 20 | 1.247 | 0.4 | -4.48 |
| 25 | 1.0000 | 0.0 | -4.34 |
| 30 | 0.8072 | 0.4 | -4.21 |
| 35 | 0.6559 | 0.8 | -4.08 |
| 40 | 0.5362 | 1.2 | -3.96 |
| 45 | 0.4410 | 1.7 | -3.85 |
| 50 | 0.3647 | 2.2 | -3.74 |
| 55 | 0.3033 | 2.8 | -3.63 |
| 60 | 0.2535 | 3.4 | -3.53 |
| 65 | 0.2130 | 4.0 | -3.43 |
| 70 | 0.1798 | 4.6 | -3.34 |
| 75 | 0.1525 | 5.2 | -3.25 |
| 80 | 0.1300 | 5.9 | -3.16 |
| 85 | 0.1112 | 6.6 | -3.08 |
| 90 | 0.09552 | 7.3 | -2.99 |
| 95 | 0.08239 | 8.0 | -2.92 |
| 100 | 0.07133 | 8.7 | -2.84 |
| 105 | 0.06199 | 9.4 | -2.77 |
| 110 | 0.05406 | 10.1 | -2.70 |
| 115 | 0.04731 | 10.9 | -2.63 |
| 120 | 0.04153 | 11.6 | -2.57 |
| 125 | 0.03658 | 12.3 | -2.51 |
| 130 | 0.03231 | 13.1 | -2.45 |
| 135 | 0.02863 | 13.8 | -2.39 |
| 140 | 0.02544 | 14.6 | -2.33 |
| 145 | 0.02267 | 15.3 | -2.28 |
| 150 | 0.02025 | 16.1 | -2.23 |

| T (°C) | Material B(K) | | |
|-----------|---------------|--------|----------|
| | ME 3975 | | |
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 103.9 | 2.47 | -7.56 |
| -50 | 71.53 | 2.26 | -7.28 |
| -45 | 49.94 | 2.06 | -7.01 |
| -40 | 35.32 | 1.87 | -6.76 |
| -35 | 25.29 | 1.69 | -6.53 |
| -30 | 18.32 | 1.52 | -6.30 |
| -25 | 13.43 | 1.35 | -6.08 |
| -20 | 9.945 | 1.19 | -5.88 |
| -15 | 7.440 | 1.04 | -5.68 |
| -10 | 5.621 | 0.89 | -5.50 |
| -5 | 4.286 | 0.75 | -5.32 |
| 0 | 3.297 | 0.61 | -5.15 |
| 5 | 2.557 | 0.48 | -4.98 |
| 10 | 2.000 | 0.35 | -4.83 |
| 15 | 1.576 | 0.23 | -4.68 |
| 20 | 1.251 | 0.11 | -4.54 |
| 25 | 1.0000 | 0.00 | -4.40 |
| 30 | 0.8048 | 0.11 | -4.27 |
| 35 | 0.6519 | 0.22 | -4.14 |
| 40 | 0.5313 | 0.32 | -4.02 |
| 45 | 0.4356 | 0.42 | -3.91 |
| 50 | 0.3591 | 0.52 | -3.80 |
| 55 | 0.2977 | 0.61 | -3.69 |
| 60 | 0.2481 | 0.70 | -3.59 |
| 65 | 0.2078 | 0.79 | -3.49 |
| 70 | 0.1749 | 0.88 | -3.40 |
| 75 | 0.1479 | 0.96 | -3.31 |
| 80 | 0.1256 | 1.04 | -3.22 |
| 85 | 0.1071 | 1.12 | -3.14 |
| 90 | 0.09175 | 1.20 | -3.06 |
| 95 | 0.07890 | 1.27 | -2.98 |
| 100 | 0.06810 | 1.35 | -2.90 |
| 105 | 0.05900 | 1.42 | -2.83 |
| 110 | 0.05130 | 1.49 | -2.76 |
| 115 | 0.04476 | 1.55 | -2.69 |
| 120 | 0.03918 | 1.62 | -2.63 |
| 125 | 0.03441 | 1.68 | -2.57 |
| 130 | 0.03031 | 1.75 | -2.50 |
| 135 | 0.02678 | 1.81 | -2.45 |
| 140 | 0.02373 | 1.87 | -2.39 |
| 145 | 0.02108 | 1.93 | -2.34 |
| 150 | 0.01878 | 1.98 | -2.28 |

| T (°C) | Material B(K) | | |
|-----------|---------------|--------|----------|
| | M4 3995 | | |
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 98.22 | 23.5 | -7.38 |
| -50 | 68.17 | 20.3 | -7.12 |
| -45 | 47.92 | 17.5 | -6.88 |
| -40 | 34.11 | 14.9 | -6.64 |
| -35 | 24.57 | 12.7 | -6.42 |
| -30 | 17.89 | 10.7 | -6.20 |
| -25 | 13.17 | 8.9 | -6.00 |
| -20 | 9.790 | 7.4 | -5.80 |
| -15 | 7.349 | 6.0 | -5.62 |
| -10 | 5.568 | 4.8 | -5.44 |
| -5 | 4.256 | 3.8 | -5.27 |
| 0 | 3.280 | 2.8 | -5.11 |
| 5 | 2.549 | 2.1 | -4.95 |
| 10 | 1.996 | 1.4 | -4.80 |
| 15 | 1.574 | 0.8 | -4.66 |
| 20 | 1.250 | 0.4 | -4.52 |
| 25 | 1.0000 | 0.0 | -4.39 |
| 30 | 0.8049 | 0.4 | -4.27 |
| 35 | 0.6519 | 0.8 | -4.15 |
| 40 | 0.5311 | 1.2 | -4.03 |
| 45 | 0.4352 | 1.7 | -3.92 |
| 50 | 0.3586 | 2.3 | -3.81 |
| 55 | 0.2970 | 2.8 | -3.71 |
| 60 | 0.2472 | 3.4 | -3.61 |
| 65 | 0.2068 | 4.1 | -3.52 |
| 70 | 0.1738 | 4.7 | -3.42 |
| 75 | 0.1468 | 5.4 | -3.34 |
| 80 | 0.1245 | 6.0 | -3.25 |
| 85 | 0.1060 | 6.7 | -3.17 |
| 90 | 0.09060 | 7.4 | -3.09 |
| 95 | 0.07776 | 8.2 | -3.01 |
| 100 | 0.06700 | 8.9 | -2.94 |
| 105 | 0.05793 | 9.6 | -2.87 |
| 110 | 0.05026 | 10.4 | -2.80 |
| 115 | 0.04376 | 11.1 | -2.74 |
| 120 | 0.03822 | 11.9 | -2.67 |
| 125 | 0.03349 | 12.6 | -2.61 |
| 130 | 0.02944 | 13.4 | -2.55 |
| 135 | 0.02595 | 14.1 | -2.49 |
| 140 | 0.02294 | 14.9 | -2.44 |
| 145 | 0.02033 | 15.6 | -2.38 |
| 150 | 0.01807 | 16.4 | -2.33 |



The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

TABLES OF RESISTANCE VS TEMPERATURE



| T (°C) | Material B(K) MN 4077 | | |
|-----------|--------------------------|--------|----------|
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 103.6 | 2.54 | -7.39 |
| -50 | 71.79 | 2.32 | -7.14 |
| -45 | 50.39 | 2.12 | -6.90 |
| -40 | 35.79 | 1.92 | -6.68 |
| -35 | 25.71 | 1.74 | -6.46 |
| -30 | 18.67 | 1.56 | -6.25 |
| -25 | 13.70 | 1.39 | -6.06 |
| -20 | 10.15 | 1.22 | -5.87 |
| -15 | 7.591 | 1.06 | -5.68 |
| -10 | 5.730 | 0.91 | -5.51 |
| -5 | 4.362 | 0.77 | -5.34 |
| 0 | 3.349 | 0.63 | -5.18 |
| 5 | 2.592 | 0.49 | -5.03 |
| 10 | 2.021 | 0.36 | -4.88 |
| 15 | 1.587 | 0.24 | -4.74 |
| 20 | 1.256 | 0.12 | -4.60 |
| 25 | 1.0000 | 0.00 | -4.47 |
| 30 | 0.8016 | 0.11 | -4.35 |
| 35 | 0.6465 | 0.22 | -4.23 |
| 40 | 0.5246 | 0.33 | -4.11 |
| 45 | 0.4281 | 0.43 | -4.00 |
| 50 | 0.3514 | 0.53 | -3.89 |
| 55 | 0.2899 | 0.63 | -3.79 |
| 60 | 0.2404 | 0.72 | -3.69 |
| 65 | 0.2004 | 0.81 | -3.59 |
| 70 | 0.1678 | 0.90 | -3.50 |
| 75 | 0.1411 | 0.99 | -3.41 |
| 80 | 0.1193 | 1.07 | -3.32 |
| 85 | 0.1012 | 1.15 | -3.24 |
| 90 | 0.08624 | 1.23 | -3.16 |
| 95 | 0.07378 | 1.31 | -3.08 |
| 100 | 0.06336 | 1.38 | -3.00 |
| 105 | 0.05462 | 1.46 | -2.93 |
| 110 | 0.04725 | 1.53 | -2.86 |
| 115 | 0.04101 | 1.60 | -2.79 |
| 120 | 0.03572 | 1.67 | -2.73 |
| 125 | 0.03122 | 1.73 | -2.66 |
| 130 | 0.02736 | 1.80 | -2.60 |
| 135 | 0.02406 | 1.86 | -2.54 |
| 140 | 0.02121 | 1.92 | -2.49 |
| 145 | 0.01876 | 1.98 | -2.43 |
| 150 | 0.01663 | 2.04 | -2.38 |

| T (°C) | Material B(K) N 4080 | | |
|-----------|-------------------------|--------|----------|
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 110.1 | 24.0 | -7.50 |
| -50 | 75.89 | 20.7 | -7.25 |
| -45 | 52.97 | 17.8 | -7.01 |
| -40 | 37.42 | 15.2 | -6.78 |
| -35 | 26.75 | 12.9 | -6.56 |
| -30 | 19.33 | 10.9 | -6.35 |
| -25 | 14.11 | 9.1 | -6.14 |
| -20 | 10.41 | 7.5 | -5.95 |
| -15 | 7.758 | 6.1 | -5.76 |
| -10 | 5.834 | 4.9 | -5.58 |
| -5 | 4.426 | 3.8 | -5.41 |
| 0 | 3.387 | 2.9 | -5.24 |
| 5 | 2.614 | 2.1 | -5.08 |
| 10 | 2.033 | 1.4 | -4.93 |
| 15 | 1.593 | 0.9 | -4.78 |
| 20 | 1.258 | 0.4 | -4.64 |
| 25 | 1.0000 | 0.0 | -4.51 |
| 30 | 0.8004 | 0.4 | -4.37 |
| 35 | 0.6449 | 0.8 | -4.25 |
| 40 | 0.5228 | 1.3 | -4.13 |
| 45 | 0.4264 | 1.8 | -4.01 |
| 50 | 0.3497 | 2.3 | -3.90 |
| 55 | 0.2885 | 2.9 | -3.79 |
| 60 | 0.2392 | 3.5 | -3.68 |
| 65 | 0.1994 | 4.1 | -3.58 |
| 70 | 0.1671 | 4.8 | -3.49 |
| 75 | 0.1406 | 5.5 | -3.39 |
| 80 | 0.1189 | 6.2 | -3.30 |
| 85 | 0.1010 | 6.9 | -3.22 |
| 90 | 0.08616 | 7.6 | -3.13 |
| 95 | 0.07381 | 8.3 | -3.05 |
| 100 | 0.06347 | 9.1 | -2.97 |
| 105 | 0.05480 | 9.8 | -2.90 |
| 110 | 0.04748 | 10.6 | -2.83 |
| 115 | 0.04129 | 11.3 | -2.76 |
| 120 | 0.03603 | 12.1 | -2.69 |
| 125 | 0.03155 | 12.9 | -2.62 |
| 130 | 0.02771 | 13.7 | -2.56 |
| 135 | 0.02442 | 14.4 | -2.50 |
| 140 | 0.02158 | 15.2 | -2.44 |
| 145 | 0.01913 | 16.0 | -2.38 |
| 150 | 0.01700 | 16.8 | -2.33 |

| T (°C) | Material B(K) NA 4100 | | |
|-----------|--------------------------|--------|----------|
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 109.5 | 8.0 | -7.53 |
| -50 | 75.44 | 6.9 | -7.27 |
| -45 | 52.64 | 6.0 | -7.02 |
| -40 | 37.19 | 5.1 | -6.78 |
| -35 | 26.59 | 4.3 | -6.56 |
| -30 | 19.22 | 3.7 | -6.34 |
| -25 | 14.05 | 3.1 | -6.14 |
| -20 | 10.37 | 2.5 | -5.94 |
| -15 | 7.730 | 2.1 | -5.75 |
| -10 | 5.817 | 1.6 | -5.57 |
| -5 | 4.417 | 1.3 | -5.40 |
| 0 | 3.382 | 1.0 | -5.23 |
| 5 | 2.611 | 0.7 | -5.08 |
| 10 | 2.032 | 0.5 | -4.92 |
| 15 | 1.593 | 0.3 | -4.78 |
| 20 | 1.258 | 0.1 | -4.64 |
| 25 | 1.0000 | 0.0 | -4.51 |
| 30 | 0.8003 | 0.1 | -4.38 |
| 35 | 0.6446 | 0.3 | -4.25 |
| 40 | 0.5224 | 0.4 | -4.14 |
| 45 | 0.4258 | 0.6 | -4.02 |
| 50 | 0.3490 | 0.8 | -3.91 |
| 55 | 0.2877 | 1.0 | -3.81 |
| 60 | 0.2383 | 1.2 | -3.71 |
| 65 | 0.1984 | 1.4 | -3.61 |
| 70 | 0.1660 | 1.6 | -3.51 |
| 75 | 0.1395 | 1.8 | -3.42 |
| 80 | 0.1178 | 2.1 | -3.34 |
| 85 | 0.09989 | 2.3 | -3.25 |
| 90 | 0.08506 | 2.5 | -3.17 |
| 95 | 0.07271 | 2.8 | -3.09 |
| 100 | 0.06240 | 3.0 | -3.02 |
| 105 | 0.05375 | 3.3 | -2.94 |
| 110 | 0.04647 | 3.5 | -2.87 |
| 115 | 0.04032 | 3.8 | -2.81 |
| 120 | 0.03509 | 4.1 | -2.74 |
| 125 | 0.03065 | 4.3 | -2.68 |
| 130 | 0.02685 | 4.6 | -2.61 |
| 135 | 0.02359 | 4.8 | -2.55 |
| 140 | 0.02079 | 5.1 | -2.50 |
| 145 | 0.01837 | 5.4 | -2.44 |
| 150 | 0.01628 | 5.6 | -2.39 |

| T (°C) | Material B(K) NC 4080 | | |
|-----------|--------------------------|--------|----------|
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 105.4 | 24.0 | -7.45 |
| -50 | 72.89 | 20.7 | -7.20 |
| -45 | 51.04 | 17.8 | -6.95 |
| -40 | 36.18 | 15.2 | -6.72 |
| -35 | 25.94 | 12.9 | -6.50 |
| -30 | 18.81 | 10.9 | -6.29 |
| -25 | 13.78 | 9.1 | -6.08 |
| -20 | 10.20 | 7.5 | -5.89 |
| -15 | 7.621 | 6.1 | -5.71 |
| -10 | 5.748 | 4.9 | -5.53 |
| -5 | 4.373 | 3.8 | -5.36 |
| 0 | 3.355 | 2.9 | -5.20 |
| 5 | 2.595 | 2.1 | -5.04 |
| 10 | 2.023 | 1.4 | -4.89 |
| 15 | 1.588 | 0.9 | -4.75 |
| 20 | 1.256 | 0.4 | -4.61 |
| 25 | 1.0000 | 0.0 | -4.48 |
| 30 | 0.8014 | 0.4 | -4.35 |
| 35 | 0.6463 | 0.8 | -4.23 |
| 40 | 0.5243 | 1.3 | -4.11 |
| 45 | 0.4278 | 1.8 | -4.00 |
| 50 | 0.3510 | 2.3 | -3.89 |
| 55 | 0.2896 | 2.9 | -3.79 |
| 60 | 0.2401 | 3.5 | -3.69 |
| 65 | 0.2001 | 4.1 | -3.59 |
| 70 | 0.1675 | 4.8 | -3.50 |
| 75 | 0.1409 | 5.5 | -3.41 |
| 80 | 0.1190 | 6.2 | -3.32 |
| 85 | 0.1010 | 6.9 | -3.24 |
| 90 | 0.08605 | 7.6 | -3.16 |
| 95 | 0.07360 | 8.3 | -3.08 |
| 100 | 0.06319 | 9.1 | -3.01 |
| 105 | 0.05446 | 9.8 | -2.94 |
| 110 | 0.04710 | 10.6 | -2.87 |
| 115 | 0.04087 | 11.3 | -2.80 |
| 120 | 0.03559 | 12.1 | -2.73 |
| 125 | 0.03109 | 12.9 | -2.67 |
| 130 | 0.02724 | 13.7 | -2.61 |
| 135 | 0.02394 | 14.4 | -2.55 |
| 140 | 0.02111 | 15.2 | -2.49 |
| 145 | 0.01866 | 16.0 | -2.44 |
| 150 | 0.01654 | 16.8 | -2.38 |

| T (°C) | Material B(K) NE 4100 | | |
|-----------|--------------------------|--------|----------|
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 97.27 | 24.1 | -7.2 |
| -50 | 67.99 | 20.8 | -7.0 |
| -45 | 48.08 | 17.9 | -6.8 |
| -40 | 34.39 | 15.3 | -6.5 |
| -35 | 24.85 | 13.0 | -6.3 |
| -30 | 18.15 | 11.0 | -6.1 |
| -25 | 13.38 | 9.2 | -6.0 |
| -20 | 9.960 | 7.6 | -5.8 |
| -15 | 7.479 | 6.2 | -5.6 |
| -10 | 5.664 | 4.9 | -5.4 |
| -5 | 4.325 | 3.8 | -5.3 |
| 0 | 3.328 | 2.9 | -5.1 |
| 5 | 2.581 | 2.1 | -5.0 |
| 10 | 2.016 | 1.4 | -4.9 |
| 15 | 1.585 | 0.9 | -4.7 |
| 20 | 1.255 | 0.4 | -4.6 |
| 25 | 1.0000 | 0.0 | -4.5 |
| 30 | 0.8017 | 0.4 | -4.3 |
| 35 | 0.6466 | 0.8 | -4.2 |
| 40 | 0.5245 | 1.3 | -4.1 |
| 45 | 0.4278 | 1.8 | -4.0 |
| 50 | 0.3508 | 2.3 | -3.9 |
| 55 | 0.2891 | 2.9 | -3.8 |
| 60 | 0.2394 | 3.5 | -3.7 |
| 65 | 0.1992 | 4.2 | -3.6 |
| 70 | 0.1666 | 4.8 | -3.5 |
| 75 | 0.1399 | 5.5 | -3.4 |
| 80 | 0.11794 | 6.2 | -3.4 |
| 85 | 0.09987 | 6.9 | -3.3 |
| 90 | 0.08491 | 7.6 | -3.2 |
| 95 | 0.07246 | 8.4 | -3.1 |
| 100 | 0.06207 | 9.1 | -3.1 |
| 105 | 0.05336 | 9.9 | -3.0 |
| 110 | 0.04604 | 10.6 | -2.9 |
| 115 | 0.03985 | 11.4 | -2.8 |
| 120 | 0.03461 | 12.2 | -2.8 |
| 125 | 0.03015 | 12.9 | -2.7 |
| 130 | 0.02635 | 13.7 | -2.7 |
| 135 | 0.02309 | 14.5 | -2.6 |
| 140 | 0.0203 | 15.3 | -2.5 |
| 145 | 0.01789 | 16.1 | -2.5 |
| 150 | 0.01581 | 16.8 | -2.4 |

| T (°C) | Material B(K) N5 4160 | | |
|-----------|--------------------------|--------|----------|
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 115.8 | 16.3 | -7.52 |
| -50 | 79.72 | 14.1 | -7.28 |
| -45 | 55.54 | 12.1 | -7.04 |
| -40 | 39.15 | 10.4 | -6.82 |
| -35 | 27.91 | 8.8 | -6.61 |
| -30 | 20.11 | 7.4 | -6.40 |
| -25 | 14.64 | 6.2 | -6.20 |
| -20 | 10.77 | 5.1 | -6.01 |
| -15 | 7.996 | 4.2 | -5.83 |
| -10 | 5.991 | 3.3 | -5.65 |
| -5 | 4.529 | 2.6 | -5.48 |
| 0 | 3.454 | 2.0 | -5.31 |
| 5 | 2.655 | 1.4 | -5.16 |
| 10 | 2.057 | 1.0 | -5.00 |
| 15 | 1.606 | 0.6 | -4.86 |
| 20 | 1.263 | 0.3 | -4.72 |
| 25 | 1.0000 | 0.0 | -4.58 |
| 30 | 0.7973 | 0.3 | -4.45 |
| 35 | 0.6398 | 0.5 | -4.32 |
| 40 | 0.5167 | 0.9 | -4.20 |
| 45 | 0.4198 | 1.2 | -4.09 |
| 50 | 0.3430 | 1.6 | -3.97 |
| 55 | 0.2819 | 2.0 | -3.86 |
| 60 | 0.2329 | 2.4 | -3.76 |
| 65 | 0.1934 | 2.8 | -3.66 |
| 70 | 0.1614 | 3.3 | -3.56 |
| 75 | 0.1354 | 3.7 | -3.46 |
| 80 | 0.1141 | 4.2 | -3.37 |
| 85 | 0.09658 | 4.7 | -3.29 |
| 90 | 0.08211 | 5.2 | -3.20 |
| 95 | 0.07010 | 5.7 | -3.12 |
| 100 | 0.06009 | 6.2 | -3.04 |
| 105 | 0.05171 | 6.7 | -2.96 |
| 110 | 0.04467 | 7.2 | -2.89 |
| 115 | 0.03872 | 7.7 | -2.82 |
| 120 | 0.03369 | 8.2 | -2.75 |
| 125 | 0.02941 | 8.8 | -2.68 |
| 130 | 0.02576 | 9.3 | -2.62 |
| 135 | 0.02263 | 9.8 | -2.55 |
| 140 | 0.01995 | 10.3 | -2.49 |
| 145 | 0.01763 | 10.9 | -2.44 |
| 150 | 0.01563 | 11.4 | -2.38 |



TABLES OF RESISTANCE VS TEMPERATURE



| T (°C) | Material B(K) | | |
|-----------|---------------|--------|----------|
| | P 4220 | | |
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 121.4 | 24.8 | -7.56 |
| -50 | 83.35 | 21.5 | -7.32 |
| -45 | 57.92 | 18.4 | -7.09 |
| -40 | 40.72 | 15.8 | -6.87 |
| -35 | 28.95 | 13.4 | -6.66 |
| -30 | 20.80 | 11.3 | -6.45 |
| -25 | 15.10 | 9.4 | -6.26 |
| -20 | 11.07 | 7.8 | -6.07 |
| -15 | 8.197 | 6.3 | -5.89 |
| -10 | 6.123 | 5.1 | -5.71 |
| -5 | 4.615 | 4.0 | -5.54 |
| 0 | 3.508 | 3.0 | -5.38 |
| 5 | 2.688 | 2.2 | -5.22 |
| 10 | 2.076 | 1.5 | -5.07 |
| 15 | 1.616 | 0.9 | -4.92 |
| 20 | 1.267 | 0.4 | -4.78 |
| 25 | 1.0000 | 0.0 | -4.64 |
| 30 | 0.7949 | 0.4 | -4.51 |
| 35 | 0.6359 | 0.8 | -4.38 |
| 40 | 0.5120 | 1.3 | -4.26 |
| 45 | 0.4148 | 1.8 | -4.14 |
| 50 | 0.3379 | 2.4 | -4.03 |
| 55 | 0.2769 | 3.0 | -3.92 |
| 60 | 0.2281 | 3.6 | -3.81 |
| 65 | 0.1890 | 4.3 | -3.71 |
| 70 | 0.1573 | 5.0 | -3.61 |
| 75 | 0.1316 | 5.7 | -3.52 |
| 80 | 0.1106 | 6.4 | -3.42 |
| 85 | 0.09337 | 7.1 | -3.34 |
| 90 | 0.07918 | 7.9 | -3.25 |
| 95 | 0.06743 | 8.6 | -3.17 |
| 100 | 0.05766 | 9.4 | -3.09 |
| 105 | 0.04950 | 10.2 | -3.01 |
| 110 | 0.04266 | 10.9 | -2.93 |
| 115 | 0.03691 | 11.7 | -2.86 |
| 120 | 0.03204 | 12.5 | -2.79 |
| 125 | 0.02791 | 13.3 | -2.72 |
| 130 | 0.02439 | 14.1 | -2.66 |
| 135 | 0.02139 | 14.9 | -2.59 |
| 140 | 0.01881 | 15.7 | -2.53 |
| 145 | 0.01660 | 16.5 | -2.47 |
| 150 | 0.01469 | 17.3 | -2.42 |

| T (°C) | Material B(K) | | |
|-----------|---------------|--------|----------|
| | PA 4235 | | |
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 123.40 | 8.3 | -7.68 |
| -50 | 84.33 | 7.2 | -7.42 |
| -45 | 58.39 | 6.2 | -7.17 |
| -40 | 40.93 | 5.3 | -6.93 |
| -35 | 29.04 | 4.5 | -6.71 |
| -30 | 20.83 | 3.8 | -6.49 |
| -25 | 15.11 | 3.2 | -6.29 |
| -20 | 11.07 | 2.6 | -6.09 |
| -15 | 8.190 | 2.1 | -5.90 |
| -10 | 6.117 | 1.7 | -5.72 |
| -5 | 4.610 | 1.3 | -5.54 |
| 0 | 3.505 | 1.0 | -5.38 |
| 5 | 2.686 | 0.7 | -5.22 |
| 10 | 2.075 | 0.5 | -5.07 |
| 15 | 1.615 | 0.3 | -4.92 |
| 20 | 1.267 | 0.1 | -4.78 |
| 25 | 1.0000 | 0.0 | -4.64 |
| 30 | 0.7949 | 0.1 | -4.51 |
| 35 | 0.6359 | 0.3 | -4.39 |
| 40 | 0.5119 | 0.4 | -4.27 |
| 45 | 0.4145 | 0.6 | -4.15 |
| 50 | 0.3376 | 0.8 | -4.04 |
| 55 | 0.2764 | 1.0 | -3.93 |
| 60 | 0.2276 | 1.2 | -3.83 |
| 65 | 0.1883 | 1.4 | -3.73 |
| 70 | 0.1566 | 1.7 | -3.63 |
| 75 | 0.1308 | 1.9 | -3.54 |
| 80 | 0.1098 | 2.1 | -3.45 |
| 85 | 0.09257 | 2.4 | -3.37 |
| 90 | 0.07836 | 2.6 | -3.28 |
| 95 | 0.06661 | 2.9 | -3.20 |
| 100 | 0.05685 | 3.1 | -3.13 |
| 105 | 0.04870 | 3.4 | -3.05 |
| 110 | 0.04188 | 3.7 | -2.98 |
| 115 | 0.03614 | 3.9 | -2.91 |
| 120 | 0.03129 | 4.2 | -2.84 |
| 125 | 0.02719 | 4.5 | -2.78 |
| 130 | 0.02370 | 4.7 | -2.71 |
| 135 | 0.02072 | 5.0 | -2.65 |
| 140 | 0.01817 | 5.3 | -2.59 |
| 145 | 0.01598 | 5.5 | -2.54 |
| 150 | 0.01409 | 5.8 | -2.48 |

| T (°C) | Material B(K) | | |
|-----------|---------------|--------|----------|
| | Q 4300 | | |
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 98.04 | 25.3 | -6.87 |
| -50 | 69.53 | 21.9 | -6.70 |
| -45 | 49.73 | 18.8 | -6.53 |
| -40 | 35.87 | 16.1 | -6.37 |
| -35 | 26.08 | 13.6 | -6.22 |
| -30 | 19.12 | 11.5 | -6.07 |
| -25 | 14.12 | 9.6 | -5.92 |
| -20 | 10.51 | 7.9 | -5.78 |
| -15 | 7.877 | 6.5 | -5.64 |
| -10 | 5.947 | 5.2 | -5.50 |
| -5 | 4.521 | 4.0 | -5.37 |
| 0 | 3.460 | 3.1 | -5.24 |
| 5 | 2.666 | 2.2 | -5.11 |
| 10 | 2.067 | 1.5 | -4.99 |
| 15 | 1.613 | 0.9 | -4.87 |
| 20 | 1.266 | 0.4 | -4.75 |
| 25 | 1.0000 | 0.0 | -4.63 |
| 30 | 0.7944 | 0.4 | -4.52 |
| 35 | 0.6347 | 0.8 | -4.41 |
| 40 | 0.5099 | 1.3 | -4.30 |
| 45 | 0.4119 | 1.9 | -4.20 |
| 50 | 0.3344 | 2.4 | -4.09 |
| 55 | 0.2730 | 3.1 | -3.99 |
| 60 | 0.2239 | 3.7 | -3.90 |
| 65 | 0.1846 | 4.4 | -3.80 |
| 70 | 0.1529 | 5.1 | -3.71 |
| 75 | 0.1272 | 5.8 | -3.62 |
| 80 | 0.1063 | 6.5 | -3.53 |
| 85 | 0.08927 | 7.2 | -3.44 |
| 90 | 0.07526 | 8.0 | -3.36 |
| 95 | 0.06372 | 8.8 | -3.28 |
| 100 | 0.05417 | 9.6 | -3.20 |
| 105 | 0.04622 | 10.4 | -3.13 |
| 110 | 0.03960 | 11.2 | -3.05 |
| 115 | 0.03405 | 12.0 | -2.98 |
| 120 | 0.02938 | 12.8 | -2.91 |
| 125 | 0.02545 | 13.6 | -2.84 |
| 130 | 0.02211 | 14.4 | -2.77 |
| 135 | 0.01928 | 15.2 | -2.71 |
| 140 | 0.01686 | 16.0 | -2.64 |
| 145 | 0.01479 | 16.8 | -2.58 |
| 150 | 0.01302 | 17.7 | -2.52 |

| T (°C) | Material B(K) | | |
|-----------|---------------|--------|----------|
| | QA 4250 | | |
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 99.06 | 8.3 | -7.09 |
| -50 | 69.60 | 7.2 | -6.88 |
| -45 | 49.42 | 6.2 | -6.68 |
| -40 | 35.45 | 5.3 | -6.49 |
| -35 | 25.67 | 4.5 | -6.30 |
| -30 | 18.77 | 3.8 | -6.13 |
| -25 | 13.84 | 3.2 | -5.96 |
| -20 | 10.29 | 2.6 | -5.79 |
| -15 | 7.719 | 2.1 | -5.64 |
| -10 | 5.834 | 1.7 | -5.49 |
| -5 | 4.442 | 1.3 | -5.34 |
| 0 | 3.407 | 1.0 | -5.20 |
| 5 | 2.632 | 0.7 | -5.07 |
| 10 | 2.047 | 0.5 | -4.94 |
| 15 | 1.602 | 0.3 | -4.81 |
| 20 | 1.262 | 0.1 | -4.69 |
| 25 | 1.0000 | 0.0 | -4.57 |
| 30 | 0.7971 | 0.1 | -4.46 |
| 35 | 0.6389 | 0.3 | -4.35 |
| 40 | 0.5149 | 0.4 | -4.24 |
| 45 | 0.4172 | 0.6 | -4.14 |
| 50 | 0.3397 | 0.8 | -4.04 |
| 55 | 0.2780 | 1.0 | -3.95 |
| 60 | 0.2286 | 1.2 | -3.85 |
| 65 | 0.1888 | 1.4 | -3.76 |
| 70 | 0.1567 | 1.7 | -3.68 |
| 75 | 0.1306 | 1.9 | -3.59 |
| 80 | 0.1093 | 2.1 | -3.51 |
| 85 | 0.09179 | 2.4 | -3.43 |
| 90 | 0.07743 | 2.6 | -3.36 |
| 95 | 0.06556 | 2.9 | -3.28 |
| 100 | 0.05571 | 3.2 | -3.21 |
| 105 | 0.04752 | 3.4 | -3.14 |
| 110 | 0.04067 | 3.7 | -3.07 |
| 115 | 0.03492 | 3.9 | -3.01 |
| 120 | 0.03008 | 4.2 | -2.94 |
| 125 | 0.02600 | 4.5 | -2.88 |
| 130 | 0.02254 | 4.7 | -2.82 |
| 135 | 0.01960 | 5.0 | -2.76 |
| 140 | 0.01709 | 5.3 | -2.71 |
| 145 | 0.01495 | 5.5 | -2.65 |
| 150 | 0.01311 | 5.8 | -2.60 |

| T (°C) | Material B(K) | | |
|-----------|---------------|--------|----------|
| | R 4400 | | |
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 113.90 | 25.9 | -7.13 |
| -50 | 79.71 | 22.4 | -6.95 |
| -45 | 56.30 | 19.2 | -6.77 |
| -40 | 40.13 | 16.4 | -6.60 |
| -35 | 28.85 | 14.0 | -6.44 |
| -30 | 20.92 | 11.8 | -6.28 |
| -25 | 15.29 | 9.8 | -6.12 |
| -20 | 11.27 | 8.1 | -5.97 |
| -15 | 8.368 | 6.6 | -5.82 |
| -10 | 6.261 | 5.3 | -5.68 |
| -5 | 4.719 | 4.1 | -5.53 |
| 0 | 3.583 | 3.1 | -5.40 |
| 5 | 2.739 | 2.3 | -5.26 |
| 10 | 2.108 | 1.5 | -5.13 |
| 15 | 1.634 | 0.9 | -5.00 |
| 20 | 1.274 | 0.4 | -4.88 |
| 25 | 1.0000 | 0.0 | -4.75 |
| 30 | 0.7897 | 0.4 | -4.64 |
| 35 | 0.6273 | 0.9 | -4.52 |
| 40 | 0.5012 | 1.4 | -4.41 |
| 45 | 0.4028 | 1.9 | -4.30 |
| 50 | 0.3255 | 2.5 | -4.19 |
| 55 | 0.2644 | 3.1 | -4.09 |
| 60 | 0.2159 | 3.8 | -3.98 |
| 65 | 0.1772 | 4.5 | -3.89 |
| 70 | 0.1462 | 5.2 | -3.79 |
| 75 | 0.1212 | 5.9 | -3.70 |
| 80 | 0.1009 | 6.7 | -3.60 |
| 85 | 0.08440 | 7.4 | -3.52 |
| 90 | 0.07092 | 8.2 | -3.43 |
| 95 | 0.05984 | 9.0 | -3.35 |
| 100 | 0.05071 | 9.8 | -3.26 |
| 105 | 0.04314 | 10.6 | -3.19 |
| 110 | 0.03685 | 11.4 | -3.11 |
| 115 | 0.03160 | 12.2 | -3.03 |
| 120 | 0.02719 | 13.1 | -2.96 |
| 125 | 0.02349 | 13.9 | -2.89 |
| 130 | 0.02036 | 14.7 | -2.82 |
| 135 | 0.01770 | 15.6 | -2.76 |
| 140 | 0.01545 | 16.4 | -2.69 |
| 145 | 0.01352 | 17.2 | -2.63 |
| 150 | 0.01187 | 18.1 | -2.57 |

| T (°C) | Material B(K) | | |
|-----------|---------------|--------|----------|
| | RA 4380 | | |
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 110.80 | 8.6 | -7.24 |
| -50 | 77.24 | 7.4 | -7.03 |
| -45 | 54.44 | 6.4 | -6.83 |
| -40 | 38.76 | 5.5 | -6.63 |
| -35 | 27.87 | 4.6 | -6.45 |
| -30 | 20.22 | 3.9 | -6.27 |
| -25 | 14.81 | 3.3 | -6.10 |
| -20 | 10.94 | 2.7 | -5.93 |
| -15 | 8.144 | 2.2 | -5.78 |
| -10 | 6.112 | 1.8 | -5.62 |
| -5 | 4.623 | 1.4 | -5.48 |
| 0 | 3.522 | 1.0 | -5.34 |
| 5 | 2.702 | 0.8 | -5.20 |
| 10 | 2.087 | 0.5 | -5.07 |
| 15 | 1.623 | 0.3 | -4.94 |
| 20 | 1.270 | 0.1 | -4.82 |
| 25 | 1.0000 | 0.0 | -4.70 |
| 30 | 0.7920 | 0.1 | -4.59 |
| 35 | 0.6308 | 0.3 | -4.47 |
| 40 | 0.5052 | 0.5 | -4.37 |
| 45 | 0.4068 | 0.6 | -4.26 |
| 50 | 0.3292 | 0.8 | -4.16 |
| 55 | 0.2678 | 1.0 | -4.07 |
| 60 | 0.2189 | 1.3 | -3.97 |
| 65 | 0.1797 | 1.5 | -3.88 |
| 70 | 0.1482 | 1.7 | -3.79 |
| 75 | 0.1228 | 2.0 | -3.71 |
| 80 | 0.1022 | 2.2 | -3.63 |
| 85 | 0.08536 | 2.5 | -3.55 |
| 90 | 0.07159 | 2.7 | -3.47 |
| 95 | 0.06028 | 3.0 | -3.39 |
| 100 | 0.05095 | 3.2 | -3.32 |
| 105 | 0.04322 | 3.5 | -3.25 |
| 110 | 0.03679 | 3.8 | -3.18 |
| 115 | 0.03142 | 4.1 | -3.11 |
| 120 | 0.02693 | 4.3 | -3.05 |
| 125 | 0.02315 | 4.6 | -2.98 |
| 130 | 0.01997 | 4.9 | -2.92 |
| 135 | 0.01728 | 5.2 | -2.86 |
| 140 | 0.01499 | 5.4 | -2.80 |
| 145 | 0.01304 | 5.7 | -2.75 |
| 150 | 0.01138 | 6.0 | -2.69 |



The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

TABLES OF RESISTANCE VS TEMPERATURE



| T (°C) | Material B(K) | | |
|-----------|---------------|--------|----------|
| | RC 4340 | | |
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 105.70 | 25.5 | -7.15 |
| -50 | 74.01 | 22.1 | -6.95 |
| -45 | 52.37 | 19.0 | -6.75 |
| -40 | 37.43 | 16.2 | -6.56 |
| -35 | 27.01 | 13.8 | -6.38 |
| -30 | 19.66 | 11.6 | -6.20 |
| -25 | 14.44 | 9.7 | -6.04 |
| -20 | 10.70 | 8.0 | -5.87 |
| -15 | 7.990 | 6.5 | -5.72 |
| -10 | 6.013 | 5.2 | -5.57 |
| -5 | 4.559 | 4.1 | -5.42 |
| 0 | 3.482 | 3.1 | -5.29 |
| 5 | 2.678 | 2.2 | -5.15 |
| 10 | 2.074 | 1.5 | -5.02 |
| 15 | 1.616 | 0.9 | -4.90 |
| 20 | 1.267 | 0.4 | -4.77 |
| 25 | 1.0000 | 0.0 | -4.66 |
| 30 | 0.7936 | 0.4 | -4.54 |
| 35 | 0.6334 | 0.8 | -4.43 |
| 40 | 0.5083 | 1.3 | -4.33 |
| 45 | 0.4100 | 1.9 | -4.23 |
| 50 | 0.3325 | 2.5 | -4.13 |
| 55 | 0.2709 | 3.1 | -4.03 |
| 60 | 0.2218 | 3.7 | -3.94 |
| 65 | 0.1825 | 4.4 | -3.85 |
| 70 | 0.1508 | 5.1 | -3.76 |
| 75 | 0.1251 | 5.8 | -3.67 |
| 80 | 0.1043 | 6.6 | -3.59 |
| 85 | 0.08727 | 7.3 | -3.51 |
| 90 | 0.07332 | 8.1 | -3.43 |
| 95 | 0.06184 | 8.9 | -3.36 |
| 100 | 0.05235 | 9.7 | -3.29 |
| 105 | 0.04448 | 10.5 | -3.22 |
| 110 | 0.03793 | 11.3 | -3.15 |
| 115 | 0.03245 | 12.1 | -3.08 |
| 120 | 0.02785 | 12.9 | -3.01 |
| 125 | 0.02399 | 13.7 | -2.95 |
| 130 | 0.02072 | 14.5 | -2.89 |
| 135 | 0.01796 | 15.4 | -2.83 |
| 140 | 0.01561 | 16.2 | -2.77 |
| 145 | 0.01360 | 17.0 | -2.72 |
| 150 | 0.01189 | 17.8 | -2.66 |

| T (°C) | Material B(K) | | |
|-----------|---------------|--------|----------|
| | T 4630 | | |
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 137.10 | 27.2 | -7.33 |
| -50 | 94.94 | 23.5 | -7.15 |
| -45 | 66.35 | 20.2 | -6.98 |
| -40 | 46.78 | 17.3 | -6.82 |
| -35 | 33.25 | 14.7 | -6.66 |
| -30 | 23.84 | 12.4 | -6.50 |
| -25 | 17.23 | 10.3 | -6.35 |
| -20 | 12.54 | 8.5 | -6.20 |
| -15 | 9.206 | 6.9 | -6.05 |
| -10 | 6.807 | 5.6 | -5.91 |
| -5 | 5.070 | 4.3 | -5.77 |
| 0 | 3.803 | 3.3 | -5.63 |
| 5 | 2.873 | 2.4 | -5.50 |
| 10 | 2.185 | 1.6 | -5.36 |
| 15 | 1.673 | 1.0 | -5.23 |
| 20 | 1.289 | 0.4 | -5.11 |
| 25 | 1.0000 | 0.0 | -4.99 |
| 30 | 0.7805 | 0.4 | -4.86 |
| 35 | 0.6129 | 0.9 | -4.75 |
| 40 | 0.4841 | 1.4 | -4.63 |
| 45 | 0.3847 | 2.0 | -4.52 |
| 50 | 0.3074 | 2.6 | -4.41 |
| 55 | 0.2470 | 3.3 | -4.30 |
| 60 | 0.1996 | 4.0 | -4.19 |
| 65 | 0.1621 | 4.7 | -4.09 |
| 70 | 0.1323 | 5.4 | -3.99 |
| 75 | 0.1086 | 6.2 | -3.89 |
| 80 | 0.08951 | 7.0 | -3.80 |
| 85 | 0.07416 | 7.8 | -3.71 |
| 90 | 0.06172 | 8.6 | -3.62 |
| 95 | 0.05160 | 9.5 | -3.53 |
| 100 | 0.04333 | 10.3 | -3.44 |
| 105 | 0.03655 | 11.2 | -3.36 |
| 110 | 0.03095 | 12.0 | -3.28 |
| 115 | 0.02632 | 12.9 | -3.20 |
| 120 | 0.02246 | 13.7 | -3.12 |
| 125 | 0.01925 | 14.6 | -3.05 |
| 130 | 0.01656 | 15.5 | -2.97 |
| 135 | 0.01429 | 16.4 | -2.90 |
| 140 | 0.01238 | 17.3 | -2.83 |
| 145 | 0.01076 | 18.1 | -2.77 |
| 150 | 0.009383 | 19.0 | -2.70 |

| T (°C) | Material B(K) | | |
|-----------|---------------|--------|----------|
| | U 4840 | | |
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 173.70 | 28.5 | -7.69 |
| -50 | 118.20 | 24.6 | -7.50 |
| -45 | 81.18 | 21.2 | -7.32 |
| -40 | 56.26 | 18.1 | -7.15 |
| -35 | 39.34 | 15.4 | -6.98 |
| -30 | 27.75 | 12.9 | -6.82 |
| -25 | 19.74 | 10.8 | -6.66 |
| -20 | 14.15 | 8.9 | -6.50 |
| -15 | 10.23 | 7.3 | -6.34 |
| -10 | 7.457 | 5.8 | -6.19 |
| -5 | 5.476 | 4.5 | -6.04 |
| 0 | 4.051 | 3.4 | -5.90 |
| 5 | 3.020 | 2.5 | -5.76 |
| 10 | 2.267 | 1.7 | -5.62 |
| 15 | 1.714 | 1.0 | -5.48 |
| 20 | 1.305 | 0.5 | -5.35 |
| 25 | 1.0000 | 0.0 | -5.22 |
| 30 | 0.7715 | 0.4 | -5.09 |
| 35 | 0.5991 | 0.9 | -4.97 |
| 40 | 0.4681 | 1.5 | -4.84 |
| 45 | 0.3680 | 2.1 | -4.72 |
| 50 | 0.2911 | 2.8 | -4.61 |
| 55 | 0.2316 | 3.4 | -4.49 |
| 60 | 0.1853 | 4.2 | -4.38 |
| 65 | 0.1491 | 4.9 | -4.28 |
| 70 | 0.1206 | 5.7 | -4.17 |
| 75 | 0.09812 | 6.5 | -4.07 |
| 80 | 0.08022 | 7.3 | -3.97 |
| 85 | 0.06591 | 8.2 | -3.87 |
| 90 | 0.05442 | 9.0 | -3.77 |
| 95 | 0.04515 | 9.9 | -3.68 |
| 100 | 0.03763 | 10.8 | -3.59 |
| 105 | 0.03150 | 11.7 | -3.50 |
| 110 | 0.02649 | 12.6 | -3.42 |
| 115 | 0.02237 | 13.5 | -3.33 |
| 120 | 0.01897 | 14.4 | -3.25 |
| 125 | 0.01615 | 15.3 | -3.17 |
| 130 | 0.01380 | 16.2 | -3.10 |
| 135 | 0.01184 | 17.1 | -3.02 |
| 140 | 0.01020 | 18.0 | -2.95 |
| 145 | 0.008814 | 19.0 | -2.88 |
| 150 | 0.007643 | 19.9 | -2.81 |

| T (°C) | Material B(K) | | |
|-----------|---------------|--------|----------|
| | S 4520 | | |
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 126.10 | 26.6 | -7.25 |
| -50 | 87.75 | 23.0 | -7.07 |
| -45 | 61.60 | 19.8 | -6.90 |
| -40 | 43.63 | 16.9 | -6.73 |
| -35 | 31.17 | 14.3 | -6.56 |
| -30 | 22.46 | 12.1 | -6.40 |
| -25 | 16.31 | 10.1 | -6.25 |
| -20 | 11.94 | 8.3 | -6.10 |
| -15 | 8.809 | 6.8 | -5.95 |
| -10 | 6.549 | 5.4 | -5.80 |
| -5 | 4.904 | 4.2 | -5.66 |
| 0 | 3.699 | 3.2 | -5.52 |
| 5 | 2.810 | 2.3 | -5.39 |
| 10 | 2.149 | 1.6 | -5.26 |
| 15 | 1.654 | 1.0 | -5.13 |
| 20 | 1.282 | 0.4 | -5.00 |
| 25 | 1.0000 | 0.0 | -4.88 |
| 30 | 0.7848 | 0.4 | -4.76 |
| 35 | 0.6196 | 0.9 | -4.64 |
| 40 | 0.4921 | 1.4 | -4.52 |
| 45 | 0.3931 | 2.0 | -4.41 |
| 50 | 0.3158 | 2.6 | -4.30 |
| 55 | 0.2551 | 3.2 | -4.20 |
| 60 | 0.2072 | 3.9 | -4.09 |
| 65 | 0.1691 | 4.6 | -3.99 |
| 70 | 0.1387 | 5.3 | -3.89 |
| 75 | 0.1144 | 6.1 | -3.80 |
| 80 | 0.0948 | 6.8 | -3.71 |
| 85 | 0.0789 | 7.6 | -3.61 |
| 90 | 0.06594 | 8.4 | -3.53 |
| 95 | 0.05538 | 9.2 | -3.44 |
| 100 | 0.04671 | 10.1 | -3.36 |
| 105 | 0.03956 | 10.9 | -3.28 |
| 110 | 0.03364 | 11.7 | -3.20 |
| 115 | 0.02872 | 12.6 | -3.12 |
| 120 | 0.02461 | 13.4 | -3.04 |
| 125 | 0.02117 | 14.3 | -2.97 |
| 130 | 0.01827 | 15.1 | -2.90 |
| 135 | 0.01583 | 16.0 | -2.83 |
| 140 | 0.01376 | 16.8 | -2.77 |
| 145 | 0.01200 | 17.7 | -2.70 |
| 150 | 0.01050 | 18.6 | -2.64 |

| T (°C) | Material B(K) | | |
|-----------|---------------|--------|----------|
| | SC 4500 | | |
| | R(T) / R25 | TF (%) | α (%/°C) |
| -55 | 129.80 | 26.5 | -7.51 |
| -50 | 89.31 | 22.9 | -7.29 |
| -45 | 62.15 | 19.7 | -7.07 |
| -40 | 43.72 | 16.8 | -6.87 |
| -35 | 31.07 | 14.3 | -6.68 |
| -30 | 22.29 | 12.0 | -6.49 |
| -25 | 16.15 | 10.0 | -6.31 |
| -20 | 11.80 | 8.3 | -6.14 |
| -15 | 8.703 | 6.8 | -5.97 |
| -10 | 6.470 | 5.4 | -5.81 |
| -5 | 4.849 | 4.2 | -5.66 |
| 0 | 3.662 | 3.2 | -5.51 |
| 5 | 2.786 | 2.3 | -5.36 |
| 10 | 2.135 | 1.6 | -5.23 |
| 15 | 1.647 | 0.9 | -5.09 |
| 20 | 1.279 | 0.4 | -4.96 |
| 25 | 1.0000 | 0.0 | -4.84 |
| 30 | 0.7865 | 0.4 | -4.72 |
| 35 | 0.6223 | 0.9 | -4.60 |
| 40 | 0.4953 | 1.4 | -4.49 |
| 45 | 0.3963 | 2.0 | -4.38 |
| 50 | 0.3189 | 2.6 | -4.28 |
| 55 | 0.2579 | 3.2 | -4.18 |
| 60 | 0.2096 | 3.9 | -4.08 |
| 65 | 0.1712 | 4.6 | -3.99 |
| 70 | 0.1405 | 5.3 | -3.89 |
| 75 | 0.1159 | 6.0 | -3.80 |
| 80 | 0.09595 | 6.8 | -3.72 |
| 85 | 0.07980 | 7.6 | -3.63 |
| 90 | 0.06664 | 8.4 | -3.55 |
| 95 | 0.05588 | 9.2 | -3.47 |
| 100 | 0.04704 | 10.0 | -3.40 |
| 105 | 0.03975 | 10.8 | -3.32 |
| 110 | 0.03371 | 11.7 | -3.25 |
| 115 | 0.02869 | 12.5 | -3.18 |
| 120 | 0.02450 | 13.4 | -3.12 |
| 125 | 0.02100 | 14.2 | -3.05 |
| 130 | 0.01805 | 15.1 | -2.99 |
| 135 | 0.01557 | 15.9 | -2.92 |
| 140 | 0.01347 | 16.8 | -2.86 |
| 145 | 0.01169 | 17.6 | -2.80 |
| 150 | 0.01017 | 18.5 | -2.75 |

