

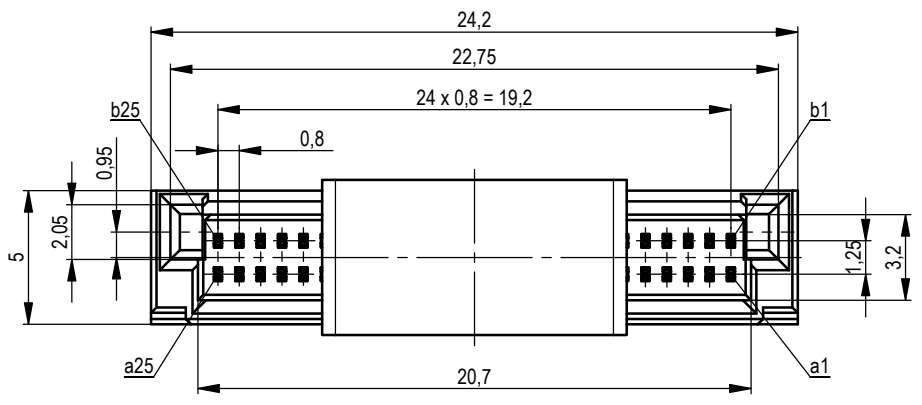



Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
 tape on reel packaging according to DIN IEC 60286-3
 Verpackungseinheit: 720 Stück
 packaging unit: 720 pcs

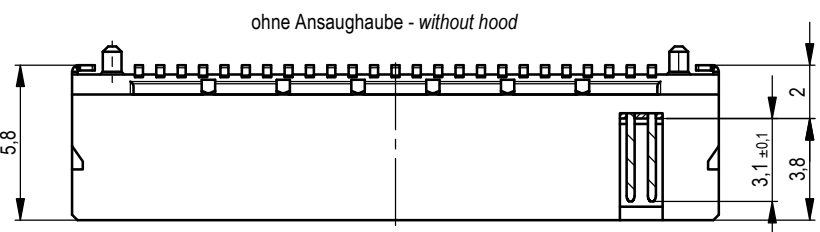

Abspulrichtung - reel off direction

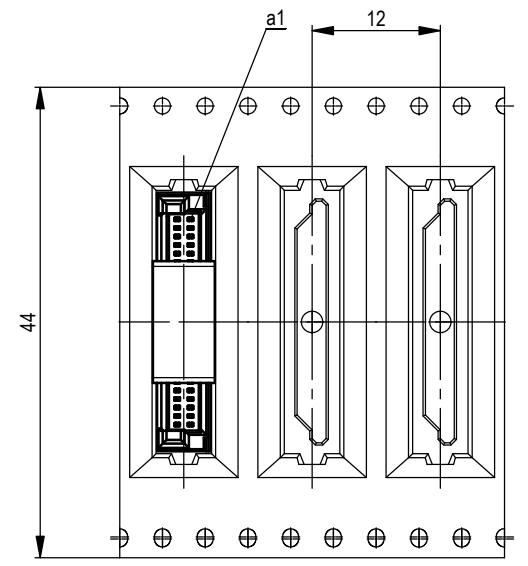


Anforderungsstufe 1
 performance level 1

Kontaktbereich vergoldet
 mating area gold plating

Anschlussbereich verzinkt 4-6 µm
 terminal area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
 coplanarity area of termination ≤ 0,1 mm

Leiterplatten-Layout Vorschlag für SMT
 PCB-Layout Proposal for SMT

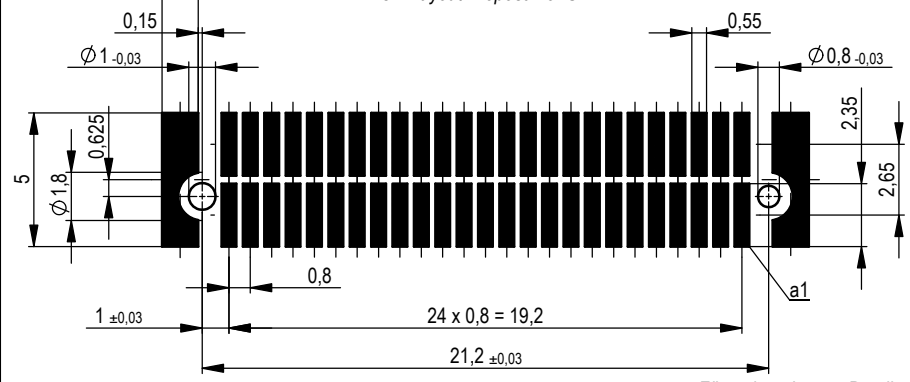

Für weitere Layout Details siehe Zeichnung: 494901
 For further layout details see drawing: 494901

Die Abbildung ist eine Zeichnung eines Erzeugnisses, das in der englischen Sprache erstellt wurde. Alle Rechte für den Fall der Fälschung, Reproduktion, Verbreitung oder sonstiger Verletzung vorbehalten. The picture is a drawing of a product, created in the English language. All rights reserved in the event of forgery, reproduction, distribution or other infringement.

Dimension no.	Tolerances	Scale 5:1
	ISO 8015	All Dimensions in mm
Customer drawing:	Subject to modification without prior notice. Drawing will not be updated.	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		MicroCon Male 2mm 50 pin 0,8 DRC-Q Type2 294151
e	11.02.2019	ERNI International AG Zürichstrasse 72 8306 Brüttisellen - Zürich Switzerland
Index	Date	
Class		DRCQ