

ITEM	PART#	DESCRIPTION	QTY	UOM
A	522130311	2.5 MINI WATER PROOF 3CKT 522130311	1	PC
C	501488000	2.5 W.P. CONN CRIMP PIN	3	PC
D	884260070	PAPER PRINTED PAPER WHITE (S100X150YAJ)	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1CX0.5 SQMM DISC PVC BK 1.6MM FLRY-B	BLACK
A2	--	1CX0.5 SQMM DISC PVC BK 1.6MM FLRY-B	BLACK
A3	--	1CX0.5 SQMM DISC PVC BK 1.6MM FLRY-B	BLACK

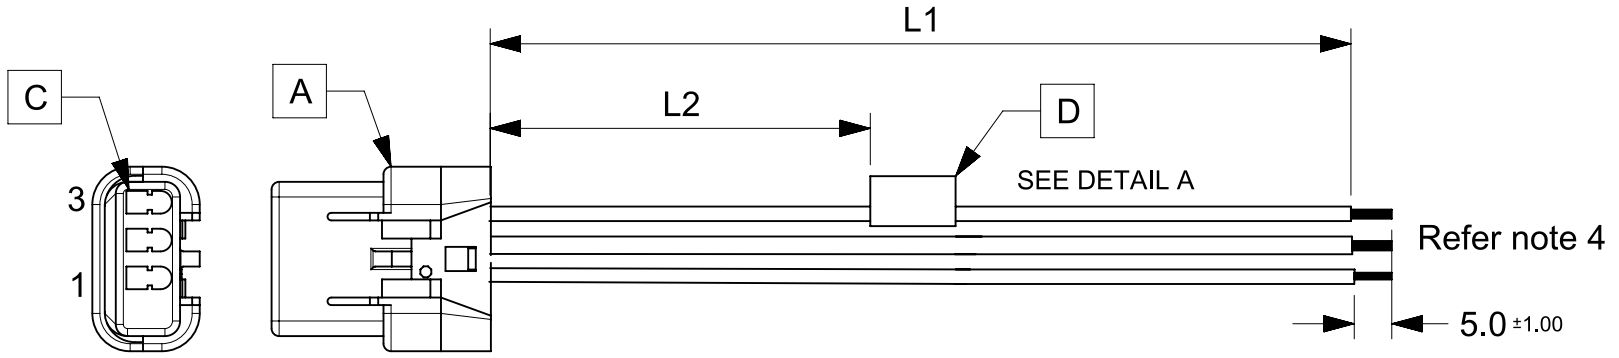


TABLE			
PART NUMBER	L1	L2	TITLE
2153111031	150±8	63 REF	MizuP25 R-S 3ckt 150mm Sn
2153111032	300±10	138 REF	MizuP25 R-S 3ckt 300mm Sn
2153111033	600±10	288 REF	MizuP25 R-S 3ckt 600mm Sn

- NOTES**
- Connector view shown is from mating side.
  - Harness must pass 100% electrical continuity and polarity.
  - Connectors must pass the sealing specifications as defined by manufacturer.
  - The free ends to be stripped twisted and tinned to the length of 5±1. the tinning dia must be 1.25mm max.
  - Label text must be 2mm max. in height with Arial font.
  - Label must be wrapped in flag type on a single cable.

MOLEX P/N  
MOLEX  
BATCH WK/YR  
DETAIL A

FUNCTIONAL SYMBOLS FA = 0 FE = 0 FP = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		<p>REFER THE TABLE</p> <p>PRODUCT CUSTOMER DRAWING</p>
	DIMENSION UNITS	SCALE	EC NO: 641784		
	mm	NTS	DRWN: NNANKOLA 2020/07/13		
	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: SD 2020/07/20		
ANGULAR TOL ± °		APPR: SD 2020/07/20		DOCUMENT NUMBER	
4 PLACES ±		INITIAL REVISION:		2153111031	
3 PLACES ±		DRWN: NNANKOLA 2020/07/13		PSD	
2 PLACES ±		APPR: SD 2020/07/20		000	
1 PLACE ±		DRWN: NNANKOLA 2020/07/13		A	
0 PLACES ±		APPR: SD 2020/07/20		REVISION	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER
			A4-SIZE	215311	REFER THE TABLE
					CUSTOMER
					GENERAL MARKET
					SHEET NUMBER
					1 OF 1