
	۳ Q	m		0		₽	
CHARCTERISTICS Senderd: Based on NULL 3B909 Series III. Shell Material :: Aliminium Shell Material :: Shell Material :: Shell Material :: Shell M	4						4
CHARCTENSTCS Standard: Based on NIL-DTL-38999 Series III Schedit Vaterial: :: Unimitim Schedit Vaterial: ::: Unimitim: Unimitim Schedit Vaterial: ::: Unimitim: Uni				LAYOUT SHOWN AS E	XAMPLE		3
CHARCTENSTCS Standard: Based on NIL-DTL-38999 Series III Schedit Vaterial: :: Unimitim Schedit Vaterial: ::: Unimitim: Unimitim Schedit Vaterial: ::: Unimitim: Uni	Key	ing Shown as example					
Standard : Based on MiLl-DTL-38999 Series III Shell Materia :: Aluminium Shell Materia :: Shell Materia :: Aluminium Shell Materia :: Sh							
Shell Material ::::::::::::::::::::::::::::::::::::							
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : 65°C to +200°C -salt Spray : 48 hours -Mass : 57.58 g ± 10% BASIC SERIES: 8D SHELL TYPE : Standard Crimp Contact SHELL SIZE : 25 CONTACT TYPE : Plug with RFI Shielding PLATING : F Nickel CONTACT TYPE : PIN(S00 Matings) CONTACT TYPE Standard Crimp Contact	-Shell Plating: Nickel-Insulator: Thermoplastic-Contacts: Copper Alloy-Seals & Grommet: Silicon Elastomer	Z 31 Max		due to a use of the Products wi the Specifications issued by either o (professional recommendation) Count	hich does not comply with f the Parties or by a third party tion, technical notice.) ry Jurisdiction & Contr		0
-Salt Spray : 48 hours -Mass : 57.58 g ± 10% BASIC SERIES: 8D 5 - 25 F 29 A C SHELL TYPE : Standard Crimp Contact 00:EINTATION : C SHELL SIZE : S5 CONTACT TYPE : Standard Crimp Contact 00:EINTATION : C	-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories						2
-Mass : 57.58 g ± 10% BASIC SERIES: 8D 5 25 F 29 A C SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 25 PLATING : F = Nickel CONTACT TYPE : PIN(500 Matings) CONTACT TYPE : PIN(500 Mati			A 06-10-2016 F	First Release			
BASIC SERIES: 8D 5 25 F 29 A C C ITTLE Aluminium Plug 8D series BASIC SERIES: 8D 5 - 25 F 29 A C S SCALE General linear NPRDS / PROJECT 859 5 - 859 - - 859 - - 859 - - - 859 -				Latest modification - by			
BASIC SERIES: 8D 5 - 25 F 29 A C SHELL TYPE : Plug with RFI Shielding	-ividss . 57.36 g ± 10%				CUSTOMER		
BASIC SERIES. BUILSTORES. BUILSTORES. <td></td> <td></td> <td>TITLE</td> <td>Alumir</td> <td>nium Plug 8D series</td> <td></td> <td></td>			TITLE	Alumir	nium Plug 8D series		
CONTACT TYPE : Standard Crimp Contact ORIENTATION : C SOURIAU SOURIAU.COM SOURIAU SHELL SIZE : 25 CONTACT TYPE : PIN(500 Matings) CONTACT LAYOUT : 25-29 FORMAT SOURIAU DRG N° SHEET PLATING : F = Nickel CONTACT LAYOUT : 25-29 FORMAT SOURIAU DRG N° SHEET 1/2 Image: Souriau Souriau Souriau Souriau Souriau		A C		Tolerances:			1
PLATING : F = Nickel FORMAT SOURIAU DRG N° SHEET A3 8D525F29AC-C 1/2			SOURIAU	WWW.SOURIAU.C	COM it must	SOURIAU not be reproduced or	
A3 8D525F29AC-C 1/2			FORMAT				l
		CONTACT LATOUT . 25-29					ł

		۵		П	m	C	כ	0	
		Contact Layout							
4		$\begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \end{array} \\ P \\ P \\ \Theta \\ \Theta$							
	Contact position Locati X-axis (mm) ID (mm) A +000 (0.00) B +258 (6.55) C +396 (10.03) D +.469 (11.91) E 469 (11.01) F +.396 (10.03) G +.258 (6.68) H +.091 (2.31) J 091 (2.31) K 263 (6.68) L 395 (10.03) M 469 (11.91) N 469 (11.91)	Y-axis (mm) Contact postion ID Y-axis (mm) Y-axis (mm) +4.481 (12.22) \$ 091 (2.31) +.321 +4.06 (10.31) T •.091 (2.31) +.321 +4.06 (10.31) T •.091 (2.31) +.321 +271 (7.04) U +.228 (5.79) +.194 -109 (2.77) V +.319 (8.10) +.000 -100 (2.77) W 240 (6.10) .181 -472 (11.99) Z 240 (6.10) .181 -472 (11.99) Z 240 (6.100) +.181 -277 (7.04) L 228 (5.79) +.194 -472 (11.99) Z 240 (6.100) +.181 -472 (11.91) B 329 (5.79) +.194 -109 (2.77) g +.000 (0.00) +.181 -109 (2.77) g +.000 (0.00) +.181	n) (8 15) (4 93) (0 00) (7 37) (7 37) (4 60) (0 00) (4 93) (4 93) (4 93) (4 93) (3 30)						
ယ	R -258 (6.55) Shell Arrangement Num size no. con								
	-								
	a							SOURIAU shall not be lia due to a use of the Pr the Specifications issued b (professional reco	oducts wh y either of
N									Countr FR
						F		PN: 8	D525I
						-	ISS DATE	-	
						-	Designed By: TITLE	Date:	Alumin
_ _						-	SCALE NA	-[(ral linear trances: ±
							SOURIA	U WWW.SOUF	RIAU.C
							format A3		JRIAU 525F2
l	Н	G		F	E)	C	

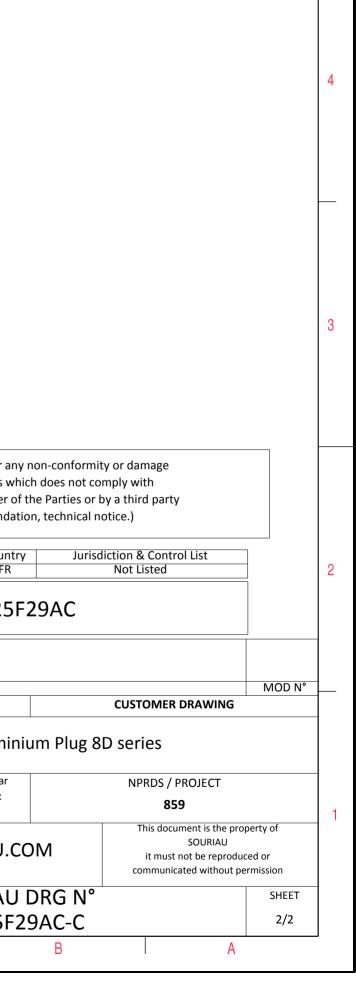

 \triangleright

σ