

ITEM	PART#	DESCRIPTION	QTY	UOM
A	469990657	MiniFitJr Plg SR PnlMnt V-0 2 Ckt	1	PC
B	39000124	MiniFit Term Crp Male C Bs Tin 16awg	2	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A2	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK

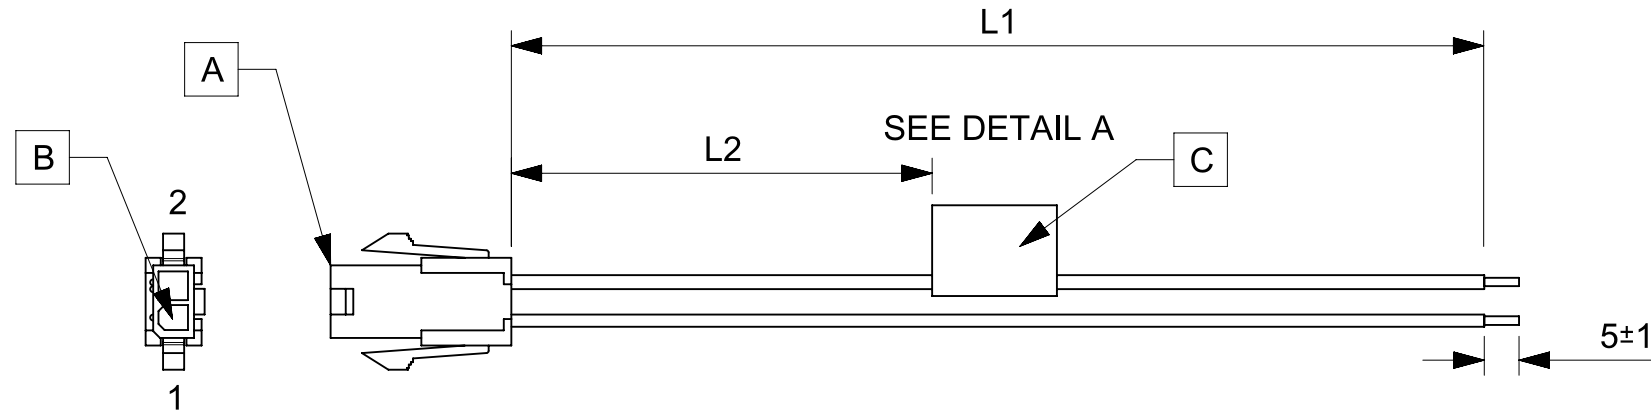


TABLE			
PART NUMBER	L1	L2	TITLE
2153231021	150±8	63 REF	MINIFIT JR SR M-S 2 CIRCUIT 150MM Sn
2153231022	300±10	138 REF	MINIFIT JR SR M-S 2 CIRCUIT 300MM Sn
2153231023	600±10	288 REF	MINIFIT JR SR M-S 2 CIRCUIT 600MM Sn

- NOTES**
1. Connector view shown is from mating side.
 2. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 1.8mm Max.
 3. Label text must be 2mm max. in height with Arial font.
 4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR

DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/03/23	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{F}{A} = 0$ $\frac{F}{E} = 0$ $\frac{F}{P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		<p>SEE TABLE</p> <p>PRODUCT CUSTOMER DRAWING</p>		
	DIMENSION UNITS	SCALE	GENERAL TOLERANCES (UNLESS SPECIFIED)				
	mm	NTS	ANGULAR TOL ± °				
	4 PLACES ±		EC NO: 638380				
3 PLACES ±		DRWN: AS20 2020/04/06		DOCUMENT NUMBER 2153231021			
2 PLACES ±		CHK'D: RDESAI01 2020/05/28			DOC TYPE PSD		
1 PLACE ±		APPR: RDESAI01 2020/05/28		DOC PART 000			
0 PLACES ±		INITIAL REVISION:			REVISION A		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES		MATERIAL NUMBER	CUSTOMER
			A4-SIZE	215323	SEE TABLE	GENERAL MARKET	1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2020/05/28	03:12:50
-----------------	----	--------------	------------	----------