


1			2			3			4			5			6			7		
PLUG COMPONENT			PLUG STRIP DIMENSION			END STRIP DIMENSION			TERMINAL COMPONENT											
COLOR	DESCRIPTION	Q'ty	R.I.J	R.O.J	COLOR	SJT 16AWGx3C	R.O.J	R.I.J	COLOR	DESCRIPTION	TYPE									
40P BLACK	PVC Compound	1	6 ⁺¹ ₋₀	19 ± 1	BLACK(L)	60°C Shielded Black Length 2000±50	15 ⁺³ ₋₀		BLACK(L)											
Gray color	Assembly Body 111-003-001	1	6 ⁺¹ ₋₀	19 ± 1	WHITE(N)		15 ⁺³ ₋₀		WHITE(N)											
			6 ⁺¹ ₋₀	19 ± 1	GREEN(E)		15 ⁺³ ₋₀		GREEN(E)											

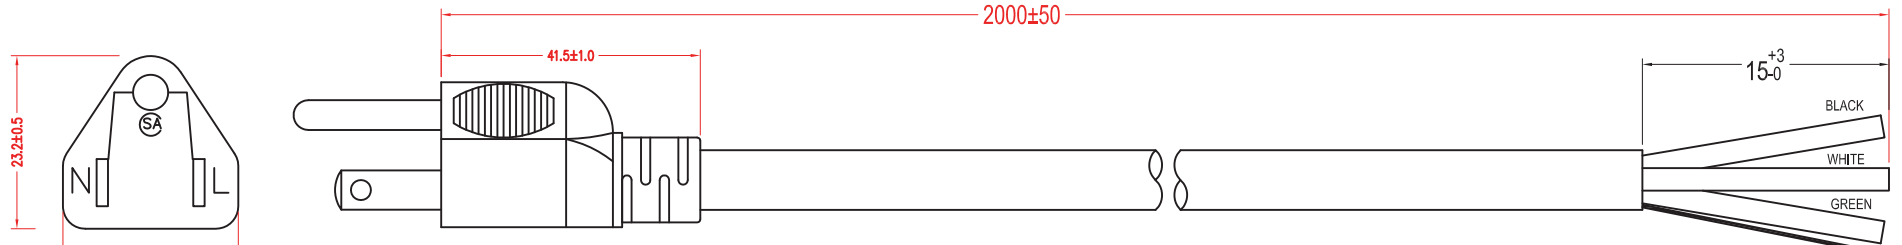


Plug type

Material:

- SJT 3 x 16AWG(1.31mm²) VW-1 Shielded, 60°C 300V
- Jacket Color: Black
- E - Green; L - Black; N - White

Electrical:

- 100% Open & Short Testing
- Insulation Resistance: 100MΩ (min.)
- Voltage: 500V DC / 1 minute

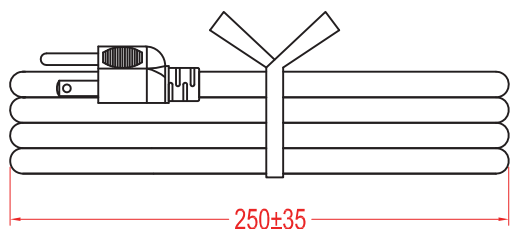

Hank Dimension

Wire Cross section

Unit: mm



Scale	Free				Date	Name	Title	
TOLERANCE					Drawn	Wilson	Power cord - SJT 60°C 16AWG Open End, Shielded 2 Meters	
X.	±X				Approved	Groll	ASSMANN WSW-No.	
X.X	±X						AK500/16-OE-5-2	
X.XX	±X						Drawing-No.	
DIM	TOL						rev00	
X.°	±X°						Replace	Sheet
X.X°	±X°							1/1
Angle	TOL	Id.	Modification	Date	Name			



1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@assmann.us