



Unit : mm

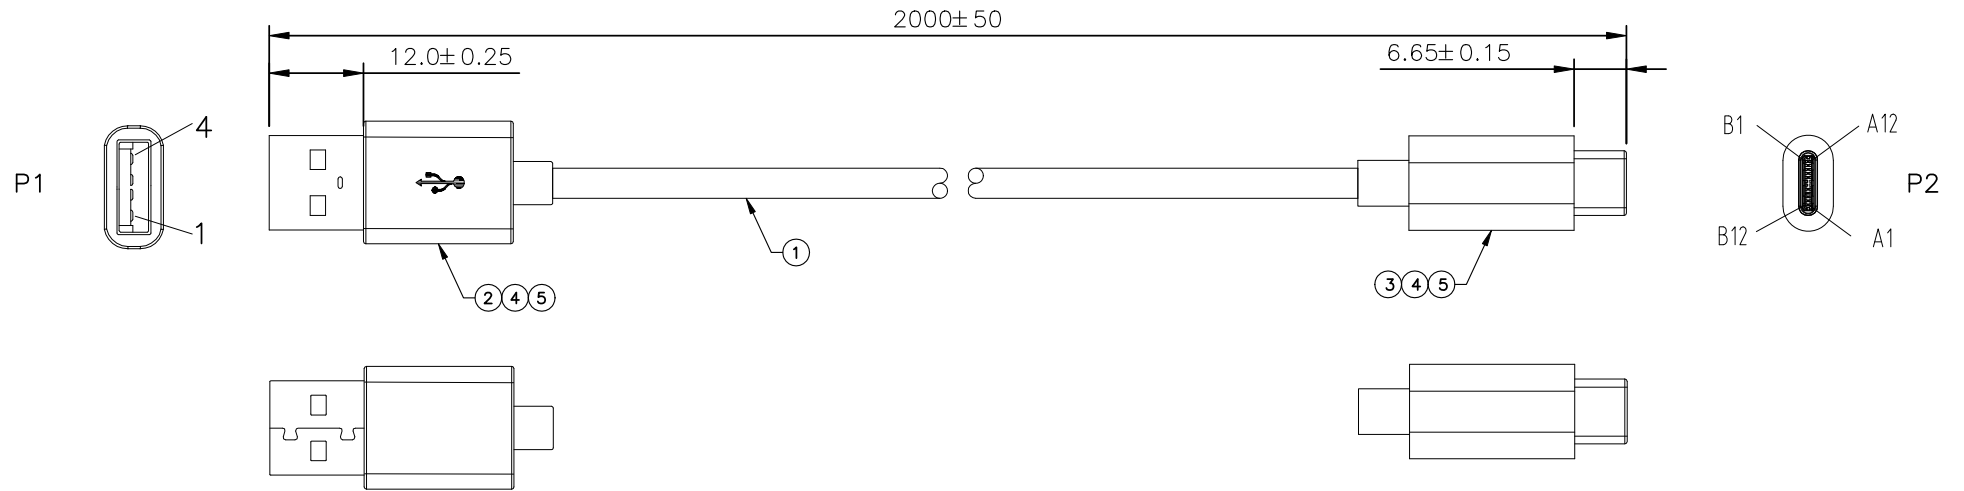

Electrical characteristics requirements:

- 1) Product must be 100% conduction, open circuit, short circuit test
- 2) conductive resistance: 2Ω MAX
- 3) Insulation resistance: $10M\Omega$ MIN DC 300V/0.01S
- 4) There is no scratch, crush, foreign body and other defects in the appearance
- 5) Products conform to the latest ROHS standard

RoHS Compliant

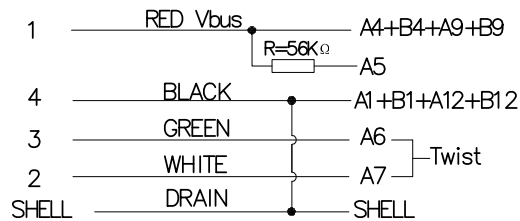

ITEM	PART No.	VENDOR	DESCRIPTION	Q'TY	OVERALL WIRE LENGTH
5	OVERMOLD	-	PVC BLACK 45P 非阻燃 ROHS+REACH	-	-
4	INNERMOLD	-	PP 透明 ROHS+REACH	-	-
3	CONN	-	USB2.0 TYPE-C/M Rp=56Ω BLACK G/F 拉伸式 铁壳镀镍 ROHS+REACH	1	-
2		-	USB2.0 A/M 一体式 BLACK胶芯 G/F LCP 铁壳镀镍 ROHS+REACH	1	-
1	CABLE	-	NO-UL,#30*1P+#26*2C+A+E BLACK PVC OD:3.5MM VW-1 ROHS+REACH	1	2000

P1	COLOR	P2
1	RED	Vbus
4	BLACK	A4+B4+A9+B9
3	GREEN	A1+B1+A12+B12
2	WHITE	A6
SHELL	DRAIN	A7
PIN ASSIGNMENT		
△3		
△2		
△1		
SYM	NAME	DATE
REVISIONS		

DRAWN BY	CHECKED BY	APPROVED BY	CONFIRMED BY	DESCRIPTION	CUST. CODE
Lulu	Iron	Iron	Waleed	USB CABLE	CUC
06/19.20'	06/19.20'	06/19.20'	06/19.20'	SHEET: 1 OF 1	CUSTOMER P/N
				DRAWING No. DH50561A	CUSTOMER P/N
				CviLux Corporation	CUSTOMER P/N
				CviLux P/N DH-20M50053	-