

т	۵	п	m	0



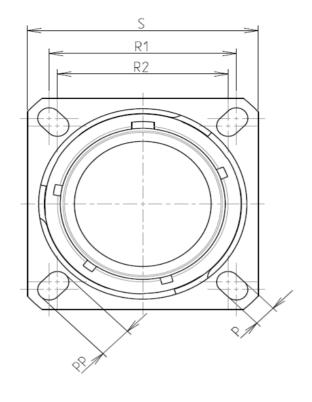



LAYOUT SHOWN AS

Keying Shown as example

F

CHARACTERISTICS

ω

-Standard : Based on MIL-DTL-38999 Series III

SHELL TYPE : Square Flange Receptacle

SHELL SIZE : 25

PLATING : F = Nickel

Н

CONTACT TYPE : Standard Crimp Contact

		Р
-Shell Material	: Aluminium	PP
-Shell Plating	: Nickel	R1
-Insulator	: Thermoplastic	R2
-Contacts	: Copper Alloy	S
	: Silicon Elastomer	V
	: Gold over copper Alloy 0.8µm minimum	Z
-		VV THRE
-		
-Temperature Range	65°C to +200°C	
-Salt Spray	: 48 hours	
-Mass	: 51.42 g ± 10%	
BASIC SERIES:	8D 0 - 25 F 29 A C	
	-Insulator -Contacts -Seals & Grommet -Contact Plating -Durability -Delivered with Souria -Temperature Range -Salt Spray -Mass	-Shell Plating: Nickel-Insulator: Thermoplastic-Contacts: Copper Alloy-Seals & Grommet: Silicon Elastomer-Contact Plating: Gold over copper Alloy 0.8µm minimum-Durability: 500 Mating cycles-Delivered with Souriau = contacts and Accessories-Temperature Range: -65°C to +200°C-Salt Spray: 48 hours-Mass: 51.42 g ± 10%

G

Connector	Connector dimension				
Dim	Nominal				
Р	3.91±0.2				
РР	6.15±0.2				
R1	38.1				
R2	34.93				
S	46±0.3				
V	20.07+0/-1.25				
W	2.1/3.2				
Z	31.5 Max				
VV THREAD	M37x1-6g				

ORIENTATION : C

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 25-29

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend



σ		Þ			
R			4		
AS EXAMPLE			3		
ndation, technica	comply with or by a third party		2		
		MOD Nº			
um Recepta ar J.COM NU DRG N 5F29AC-C	communicated without permission DRG N°				
B		A	J		

