
	Т	۵	<del>ات</del>	m			0	σ	A		
4		Z	ØS								4
ω							LAYOUT SHO	OWN AS EXAMPLE			3
			Keving S	hown as example							
СН	HARACTERISTICS			Connector dim	ension						
		IL-DTL-38999 Series III		Dim	Nominal						
-Sho -Ins -Co -Sea	hell Plating nsulator Contacts Geals & Grommet	<ul> <li>: Aluminium</li> <li>: Black Zinc Nickel</li> <li>: Thermoplastic</li> <li>: Copper Alloy</li> <li>: Silicon Elastomer</li> <li>: Gold over copper Alloy 0.8µm r</li> </ul>	ninimum	ØS Z VV THREAD	25 Max 31 Max M15x1-6g		due to a use of the Pro the Specifications issued by		with third party		2
-De	Delivered with Souriau	: 500 Mating cycles contacts and Accessories					PN: 8[	D511Z99BA			
		<ul> <li>-65°C to +175°C</li> <li>500 hours</li> </ul>				A 18-10-2	016 First Release				
		: 18.09 g ± 10%				ISS DATE	E Latest modification - by			MOD N°	
						Designed By:	Date:	CL	JSTOMER DRAWING		
						TITLE		Aluminium Plug 8D s	eries		
	ASIC SERIES: HELL TYPE : Plug with	8D 5 -	11 Z 99 B	A		SCALE NA		al linear rances: ±	NPRDS / PROJECT 859	auto af	1
— —	ONTACT TYPE :Star HELL SIZE:11	dard Crimp Contact		CONTACT TY	ORIENTATION : A PE : SOCKET(500 Matings)	SOURIA	WWW.SOUF	RIAU.COM	This document is the prope SOURIAU it must not be reproduce communicated without per	ed or	
<u> </u>	LATING : Z = E	Black Zinc Nickel			CONTACT LAYOUT : 11-99	FORMAT		RIAU DRG N°		SHEET	-
						A3	8D.	511Z99BA-C		1/2	
		G	F	E		D	С	В			

-	т	۵	г	m		0
		Contact Layout				
4	-2	$ \begin{array}{c} & & & \\ & & & \\ $				
	Con posi It A E C C C C E F C C Shell Arrangement Num	tion         X-axis (mm)         Y-axis (mm)           A         +.065 (1.65)         +.113 (2.87)           B         +.130 (3.30)         +.000 (0.00)           C         +.065 (1.65)        113 (2.87)           D        065 (1.65)        113 (2.87)           D        065 (1.65)         +.113 (2.87)           E        130 (3.30)         +.000 (0.00)           F        065 (1.65)         +.113 (2.87)	٦			
ω	size <sup>no.</sup> con	itacts contacts rating location 7 20 I All MS20050-99	_			
	+					SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						Countr FR
					A 18-10-20 ISS DATE Designed By:	PN: 8D5112 16 First Release Latest modification - by Date:
					TITLE	Alumin General linear Tolerances:
<u> </u>					SOURIA	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D511Z9
L	Н	G	F	E	D	C

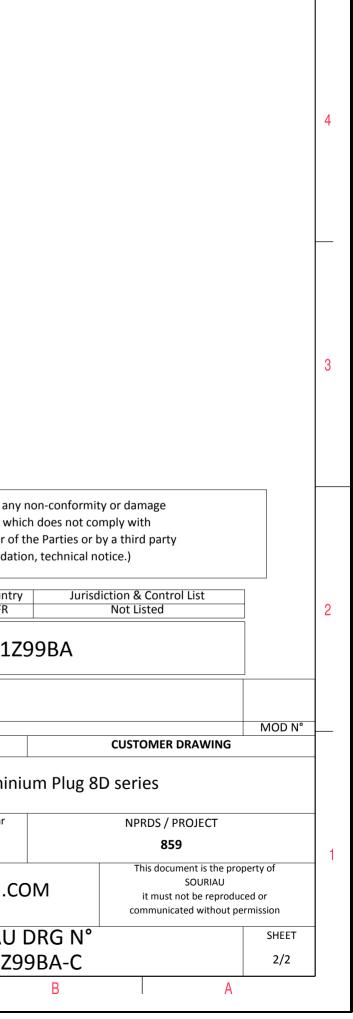

 $\triangleright$ 

σ