


Notes:

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Part No. & WK/YR Date Code, Black Text.
3. 100% Sweep Test to 18GHz w. factory stored Hi-Point data.
4. No Marker $\leq 4"$ Length

ConductRF(Wk/Yr)
FMA28-S1PR-XXX

Marker Example

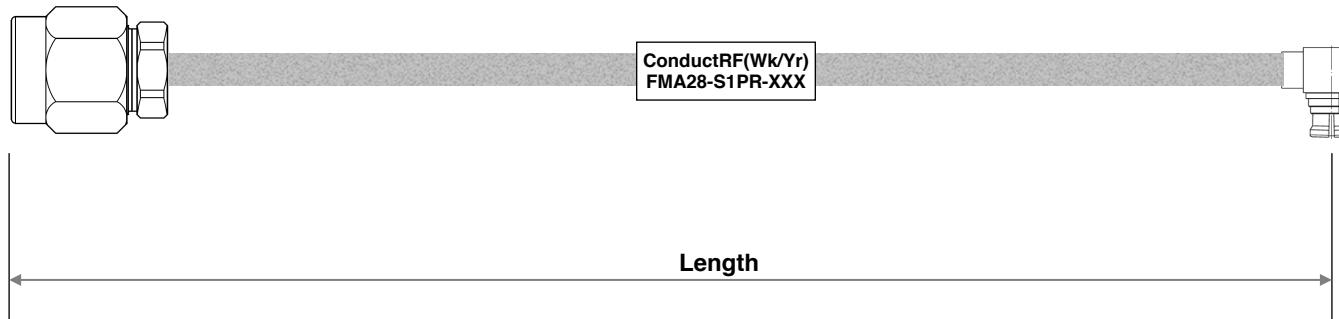


Length	XXX	Insertion Loss(dB) Typ.		
		6GHz	12GHz	18GHz
3"	S03	0.35	0.50	0.61
6"	S06	0.51	0.74	0.92
8"	S08	0.62	0.90	1.12
12"	S12	0.84	1.22	1.52
16"	S16	1.06	1.54	1.92
18"	S18	1.17	1.70	2.13
24"	S24	1.50	2.18	2.73
VSWR(Max)		1.45:1		

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)
SXX = Length in Inches (eg S18=18")
XXM = Length in Meters (eg 2M5=2.5m)
CXX = Length in CM (eg C50=50cm)

4	Label	SM3-23 1/4" 3:1	White
3	Hand Form	A28CF	Tinned
2	SMP R/A Female	PPF25A-A28G01	Gold
1	SMA Straight Male	PSM11B-A28G01	Pass. SS
ITEM	DESCRIPTION	MATERIALS	FINISH

REV.	DESCRIPTION	ECN	DRAWN	DATE	Customer DWG	Title: SMA Male to SMP R/A Female 0.086" Hand Form				
4	Updated SMP Model at Spec.		DG	09/23/20	Remarks: 035/035/5	Originated: 03/02/18	Conduct RF sales@ConductRF.com Tel: +1 978 374 684	Range: FMA		Sheet 1 of 1
3	Updated Data		DG	06/25/18				Dwg Ref: FMA28-S1PR		
2	Updated VSWR & IL to 18GHz		DG	04/06/18				Rev: 4		Part No: FMA28-S1PR-XXX
1	Pre-Release		DG	03/02/18						
REVISION HISTORY					Length Tolerances: $\leq 24" = \pm 0.25"$ $> 24" = \pm 1\%$	Checked: JW	Approved: PL			