


Notes:

1. LED Type: 2 SMD LED ;
2. Color: White 6000K-7500K ;
3. Supply Voltage: DC 3.0V ;
4. Supply Current:  $I_F = 15\text{mA} * 2$  ;
5. Luminous Intensity:  $80 \text{ cd/m}^2$  .

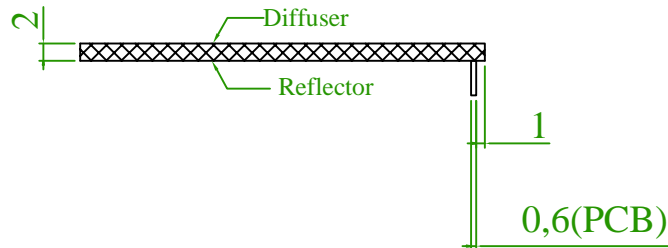

- ALF (Aluminium Foil)
- E.L.A. (Effective Light Area)
- D.S.T. (Double Side Tape)

FIELD 公差范围	TOLERANCES 公差
L>4	±0.30MM
ANGLE	±5°

佳光电子有限公司 LUCKY LIGHT ELECTRONICS CO., LTD.	TYPE 类型	背光源 (BACKLIGHT)	MATERIAL 材质	PMMA	SCALE 比例	1:1	APPROVED 承认	
	LUCKYLIGHT PART NO 佳光料号	KWB-C50-P2W	EDITION 版本	A.0	DATE 日期	2018.10.22	CHECK 核对	Sun
	CUSTOMER PART NO 客户料号		TOLERANCE 公差	±0.30 MM	PAGE 页数	1	DESIGNED 设计	Chen

