


LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
IR	-	B	INITIAL ISSUE	11FEB2013	PKS	RRP

NOTES:

1. CONTINUOUS STRIP ON REELS
2. WIRE RANGE: 18-14 AWG [0.8-2.0 SQ.mm]
3. INSULATION RANGE:  $\varnothing 2.67-4.32$
4. FEED [PITCH] : 18.0

5 AMP LOGO

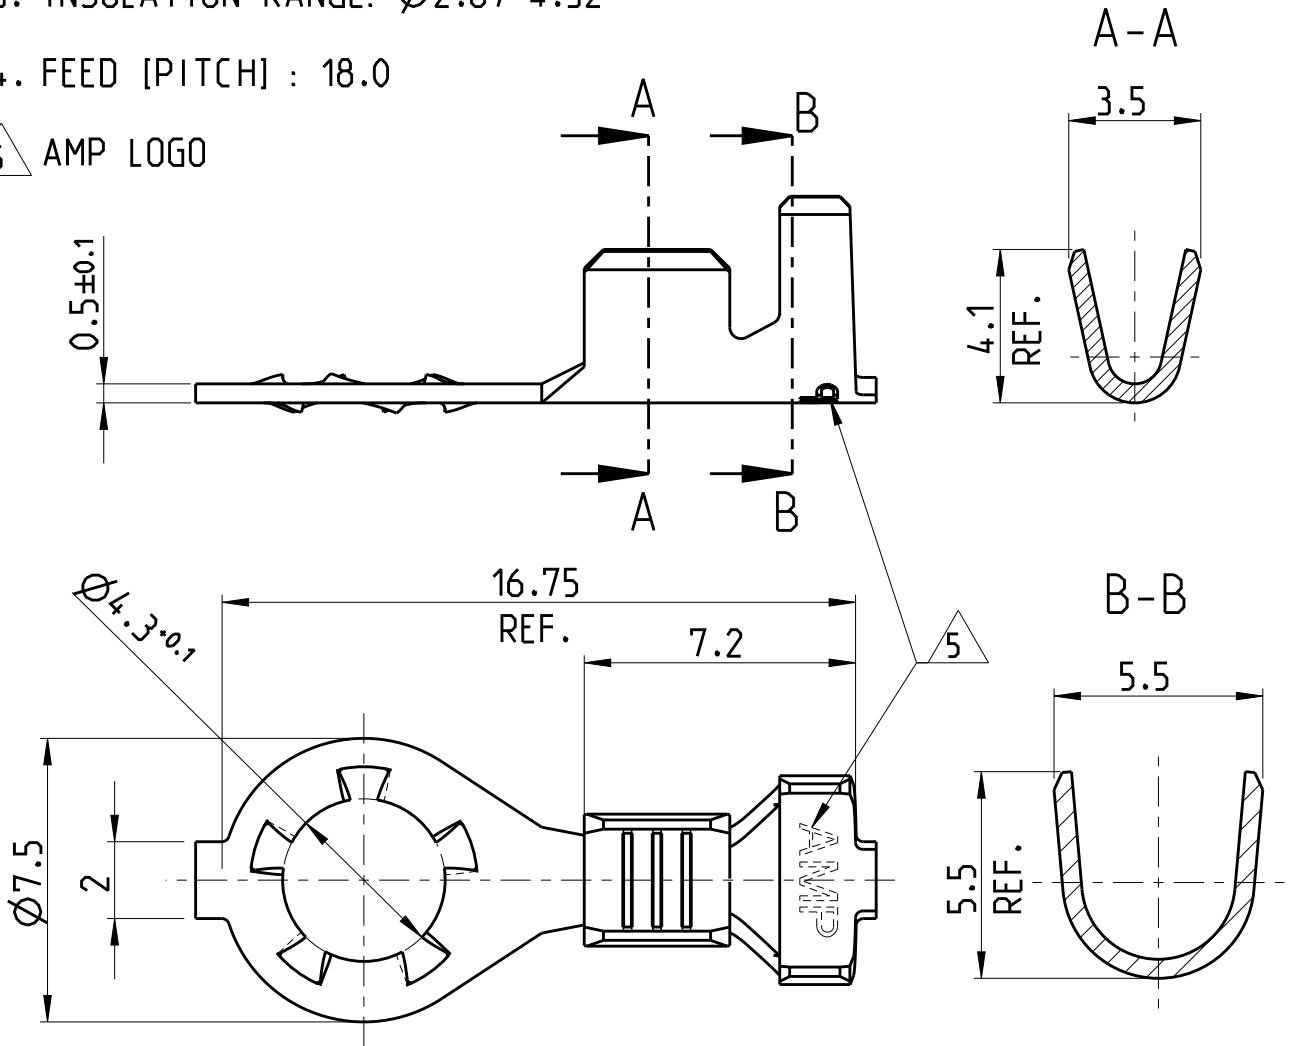

2011



RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

© COPYRIGHT 2011

PRE-TIN; 1-3 $\mu$ m	BRASS	2178304-3
FINISH	MATERIAL	PART NO

DIMENSIONS: mm	DWN SENTHIL 11FEB2013	MATERIAL SEE TABLE	FINISH SEE TABLE
TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK SENTHIL 11FEB2013	 TE Connectivity	
0 PLC $\pm 0.2$	APVD RAJENDRA 11FEB2013		
1 PLC $\pm 0.2$	PRODUCT SPEC		
2 PLC $\pm 0.1$	-	NAME ANTI-ROTATIONAL RING TONGUE TERMINAL	
3 PLC $\pm 0.05$	APPLICATION SPEC	STUD DIA. 4.3; M4	
4 PLC $\pm$	-	SIZE A 4	CAGE CODE 00779
ANGLES $\pm^\circ$	WEIGHT 0.4g approx.	DRAWING NO C-2178304	RESTRICTED TO -
	Customer Drawing	SCALE 5:1	SHEET 1 OF 1
			REV B