

# CGJ5L3X7T2D224K160AA

TDK Item Description : CGJ5L3X7T2D224KT\*\*\*



## Application & Main Feature

High Reliability Grade ( Mid Voltage (100 to 630V) )

## Series

CGJ5(3216) [EIA CC1206]



## Dimensions

L 3.20mm +/-0.2mm  
 W 1.60mm +/-0.2mm  
 T 1.60mm +/-0.2mm  
 B 0.20mm Min.  
 G 1.00mm Min.

## Temperature Characteristic

X7T (-55 to 125 degC +22,-33%)

## Rated Voltage

2D (200Vdc)

## Capacitance

220nF

## Capacitance Tolerance

K (+/-10%)

## Dissipation Factor

2.5% Max.


## Insulation Resistance

2.27Gohm Min.


## AEC-Q200

Yes


## |Z|, ESR vs. Freq. Characteristics

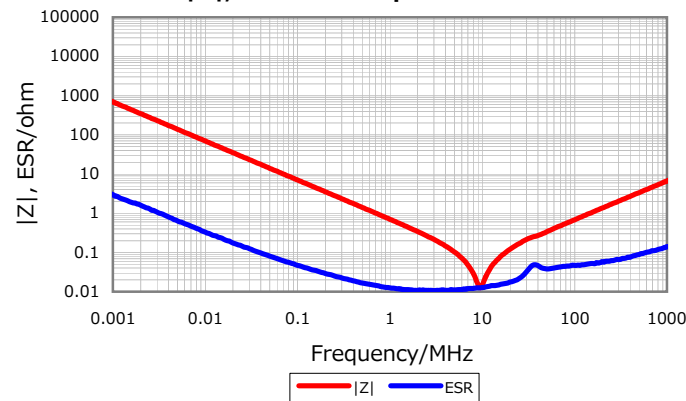


## Cap. vs. Freq. Characteristic

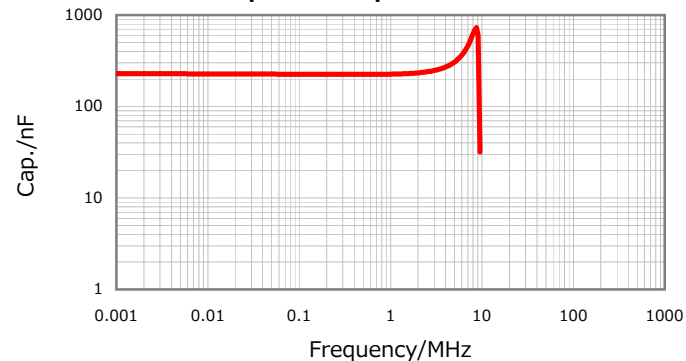


## DC Bias Characteristic

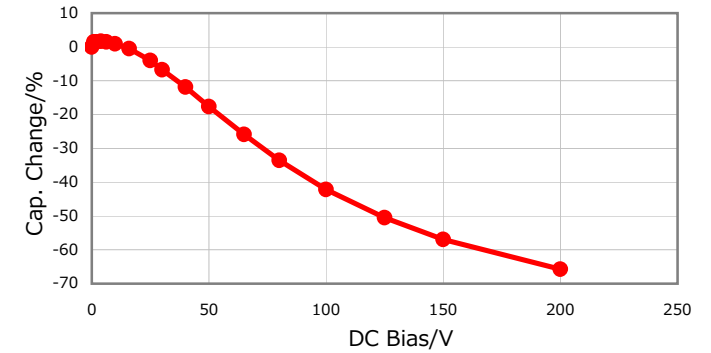

## Temperature Characteristics

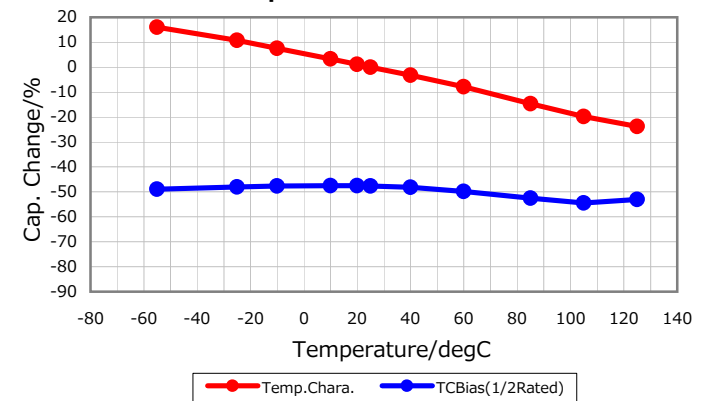

## Ripple Temperature Rise Characteristics

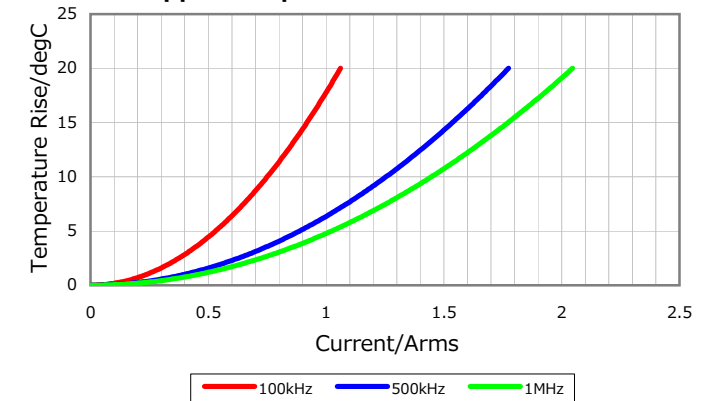

Characterization Sheet ( Multilayer Ceramic Chip Capacitors )



All specifications are subject to change without notice.

January 4, 2016