
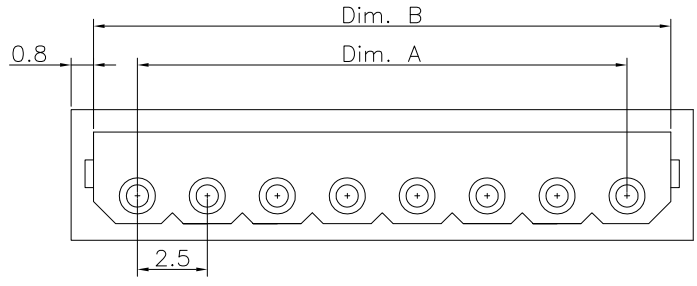
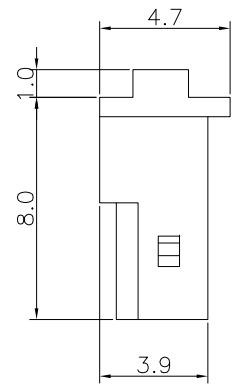


Specifications:
 Current Rating:3.0A AC,DC
 Voltage Rating:250V AC,DC
 Contact Resistance:20mohm Max
 Insulation Resistance:1000Mohm Min.
 Withstanding Voltage:1000V AC/minute
 Operating Temperature Range:-25°C~+85°C
 Application Wire:AWG 22~28

Material And Finish:
 Insulator:Nylon 66 (UL94V-0)

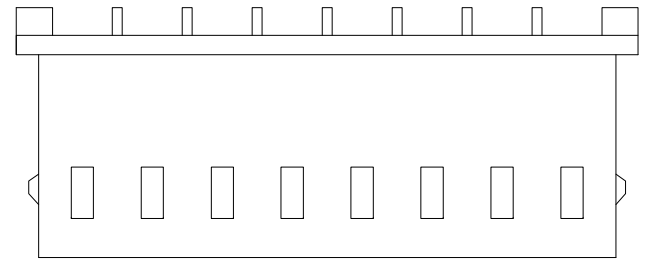

Dimension:

No.Pin	Dim. A	Dim. B	No.Pin	Dim. A	Dim. B
2	2.5	5.8	11	25.0	28.3
3	5.0	8.3	12	27.5	30.8
4	7.5	10.8			
5	10.0	13.3			
6	12.5	15.8			
7	15.0	18.3			
8	17.5	20.8			
9	20.0	23.3			
10	22.5	25.8			

RoHS Compliant

REV	DATE	FILE	BY
	17-Nov-2020		

DRAWN:
 CHECKED:
 APPROVAL:

GENERAL TOLERANCE:
 <1.5 ±0.1
 1.5~10 ±0.2
 >10 ±0.3

UNIT: MM
 SCALE:1:1
 SHEET: 1 / 1
 PROJECTION:

CnC Tech
 Industrial Cable and Connector Technology

DESCRIPTION:
 Wire-To Board Housing,2.5mm,M Series

PART NO:
 52225-XX

SIZE
 A4

A
 B
 C
 D