
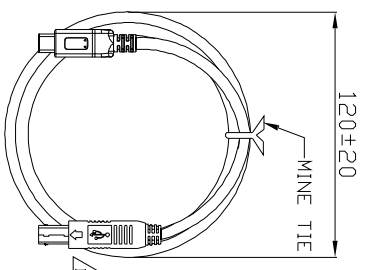
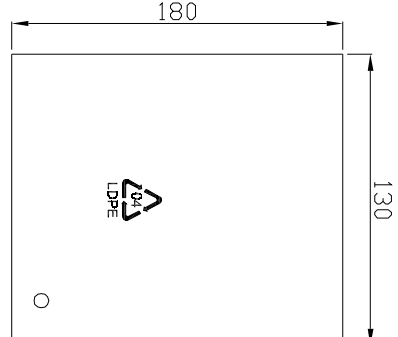
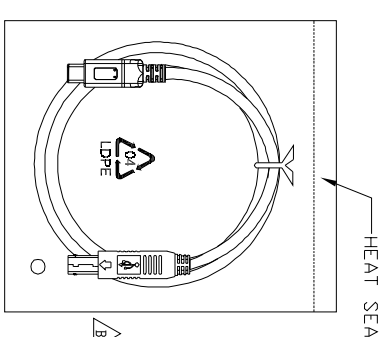
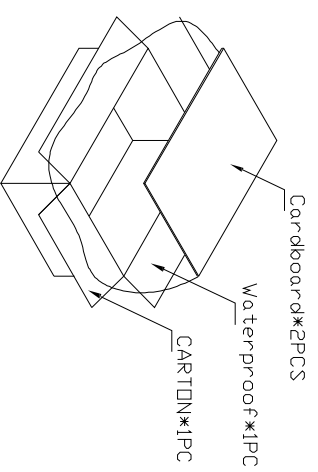
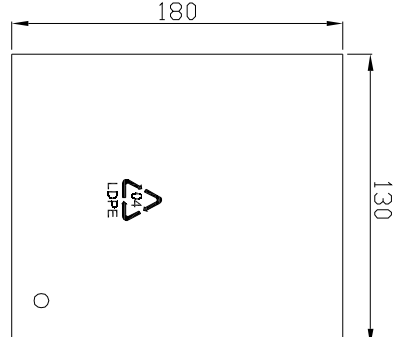
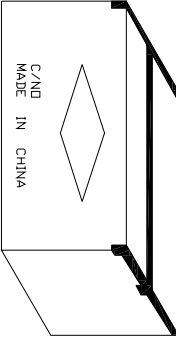


1	2	3	4	5	6	7																																													
A																																																			
B																																																			
C																																																			
D	<p>NOTE:</p> <ol style="list-style-type: none"> CABLE ASSEMBLY MUST BE ROHS COMPLIANT. CABLE MUST BE OPEN, SHORT, MISWIRE 100% TEST. USB CABLE ELECTRIC TEST: <ul style="list-style-type: none"> A. VOLTAGE: 300V DC. B. CONTACT RESISTANCE: 5Ω Max. C. INSULATION RESISTANCE: 2MΩ Min. 																																																		
E	<table border="1"> <thead> <tr> <th>NO.</th> <th>TITLE</th> <th>DESCRIPTION</th> <th>DATE</th> <th>NAME</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>CABLE</td> <td>USB 2.0 UL2725 28/24 ADB OD: 4.0mm, BLACK PVC JACKET</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>CONN P1</td> <td>Pd-NI 30U" + Gold 2U" SHELL PLATED NICKEL (W/TIN PLATE)</td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>CONN P2</td> <td>USB 2.0 BM, BLACK INSULATOR, CONTACT PLATING: SHELL PLATED NICKEL (W/TIN PLATE)</td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>PCB</td> <td>PCBA, w/Resistor(Rd 5.1kΩ)</td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>TIN</td> <td>TIN STICK, TIN WIRE</td> <td></td> <td></td> </tr> <tr> <td>6</td> <td>FOIL</td> <td>COPPER FOIL</td> <td></td> <td></td> </tr> <tr> <td>7</td> <td>INNER Mold</td> <td>PE</td> <td></td> <td></td> </tr> <tr> <td>8</td> <td>Over Mold</td> <td>PVC COLOR BLACK</td> <td></td> <td></td> </tr> </tbody> </table>						NO.	TITLE	DESCRIPTION	DATE	NAME	1	CABLE	USB 2.0 UL2725 28/24 ADB OD: 4.0mm, BLACK PVC JACKET			2	CONN P1	Pd-NI 30U" + Gold 2U" SHELL PLATED NICKEL (W/TIN PLATE)			3	CONN P2	USB 2.0 BM, BLACK INSULATOR, CONTACT PLATING: SHELL PLATED NICKEL (W/TIN PLATE)			4	PCB	PCBA, w/Resistor(Rd 5.1kΩ)			5	TIN	TIN STICK, TIN WIRE			6	FOIL	COPPER FOIL			7	INNER Mold	PE			8	Over Mold	PVC COLOR BLACK		
NO.	TITLE	DESCRIPTION	DATE	NAME																																															
1	CABLE	USB 2.0 UL2725 28/24 ADB OD: 4.0mm, BLACK PVC JACKET																																																	
2	CONN P1	Pd-NI 30U" + Gold 2U" SHELL PLATED NICKEL (W/TIN PLATE)																																																	
3	CONN P2	USB 2.0 BM, BLACK INSULATOR, CONTACT PLATING: SHELL PLATED NICKEL (W/TIN PLATE)																																																	
4	PCB	PCBA, w/Resistor(Rd 5.1kΩ)																																																	
5	TIN	TIN STICK, TIN WIRE																																																	
6	FOIL	COPPER FOIL																																																	
7	INNER Mold	PE																																																	
8	Over Mold	PVC COLOR BLACK																																																	
F	<table border="1"> <thead> <tr> <th>NO.</th> <th>TITLE</th> <th>DESCRIPTION</th> <th>DATE</th> <th>NAME</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>CABLE</td> <td>USB 2.0 UL2725 28/24 ADB OD: 4.0mm, BLACK PVC JACKET</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>CONN P1</td> <td>Pd-NI 30U" + Gold 2U" SHELL PLATED NICKEL (W/TIN PLATE)</td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>CONN P2</td> <td>USB 2.0 BM, BLACK INSULATOR, CONTACT PLATING: SHELL PLATED NICKEL (W/TIN PLATE)</td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>PCB</td> <td>PCBA, w/Resistor(Rd 5.1kΩ)</td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>TIN</td> <td>TIN STICK, TIN WIRE</td> <td></td> <td></td> </tr> <tr> <td>6</td> <td>FOIL</td> <td>COPPER FOIL</td> <td></td> <td></td> </tr> <tr> <td>7</td> <td>INNER Mold</td> <td>PE</td> <td></td> <td></td> </tr> <tr> <td>8</td> <td>Over Mold</td> <td>PVC COLOR BLACK</td> <td></td> <td></td> </tr> </tbody> </table>						NO.	TITLE	DESCRIPTION	DATE	NAME	1	CABLE	USB 2.0 UL2725 28/24 ADB OD: 4.0mm, BLACK PVC JACKET			2	CONN P1	Pd-NI 30U" + Gold 2U" SHELL PLATED NICKEL (W/TIN PLATE)			3	CONN P2	USB 2.0 BM, BLACK INSULATOR, CONTACT PLATING: SHELL PLATED NICKEL (W/TIN PLATE)			4	PCB	PCBA, w/Resistor(Rd 5.1kΩ)			5	TIN	TIN STICK, TIN WIRE			6	FOIL	COPPER FOIL			7	INNER Mold	PE			8	Over Mold	PVC COLOR BLACK		
NO.	TITLE	DESCRIPTION	DATE	NAME																																															
1	CABLE	USB 2.0 UL2725 28/24 ADB OD: 4.0mm, BLACK PVC JACKET																																																	
2	CONN P1	Pd-NI 30U" + Gold 2U" SHELL PLATED NICKEL (W/TIN PLATE)																																																	
3	CONN P2	USB 2.0 BM, BLACK INSULATOR, CONTACT PLATING: SHELL PLATED NICKEL (W/TIN PLATE)																																																	
4	PCB	PCBA, w/Resistor(Rd 5.1kΩ)																																																	
5	TIN	TIN STICK, TIN WIRE																																																	
6	FOIL	COPPER FOIL																																																	
7	INNER Mold	PE																																																	
8	Over Mold	PVC COLOR BLACK																																																	
G	<p>Scale FREE</p> <p>TOLERANCE</p> <table border="1"> <tr> <td>X.</td> <td>±1</td> </tr> <tr> <td>.X</td> <td>±0.5</td> </tr> <tr> <td>.XX</td> <td>±0.25</td> </tr> </table> <p>DIM TOL</p> <p>Change of connector dimensions and design</p> <p>Update</p> <p>Drawn</p> <p>Id.</p> <p>Modification</p> <p>Angle TOL</p>						X.	±1	.X	±0.5	.XX	±0.25																																							
X.	±1																																																		
.X	±0.5																																																		
.XX	±0.25																																																		
H	<p>RoHS compliant</p> <p>Unit: mm</p> <p>ASSMANN components</p> <p>ASSMANN WSW-No. A-USB31C-20B-XXX</p> <p>Customer-No.</p> <p>ASSMANN WSW-No. ASS 7349 CA</p> <p>Drawing-No. rev02</p> <p>Replace Sheet 1/2</p>																																																		

1	2	3	4	5	6	7
A	 <p>①</p>    <p>② USB C/BM 2.0 CABLE</p> <p>PE BAG:L180*W130*T10.05mm</p> <p>IPC CABLE/PE BAG</p> <p>(CARTON:L457*W298*H228mm Material K=K)</p>					
B	   <p>Transparent tape</p> <p>Waterproof</p> <p>(CARTON:L457*W298*H228mm,Material K=K)</p> <p>(200PCS CABLE/CARTON)</p> <p>(CARTON SLIDE)</p>					
C	<p>After the installed Product, carton sealing tape should be transparent)</p>					
D	<p>Scale FREE</p> <p>TOLERANCE</p> <p>X. ±1</p> <p>.X ±0.5</p> <p>.XX ±0.25</p> <p>DIM TOL</p> <p>Angle TOL</p>					
E	<p>① Update</p> <p>② Change of connector dimensions and design</p> <p>③ Drawn</p> <p>Id. Modification</p> <p>24.05.2018</p> <p>31.05.2018</p> <p>31.03.2015</p> <p>24.05.2018</p> <p>31.05.2018</p> <p>Segal</p> <p>Segal</p> <p>Joanna</p> <p>Winnie</p>					
F	<p>ASSMANN WSW-No.</p> <p>A-USB31C-20B-XXX</p> <p>Drawing-No.</p> <p>ASS 7349 CA</p> <p>Replace</p> <p>rev02</p> <p>Sheet 2/2</p>					
G	<p>ASSMANN</p> <p>components</p>					
H	<p>1</p> <p>2</p> <p>3</p> <p>4</p> <p>5</p> <p>6</p> <p>7</p> <p>SV372e</p>					

RoHS compliant

Unit: mm

