

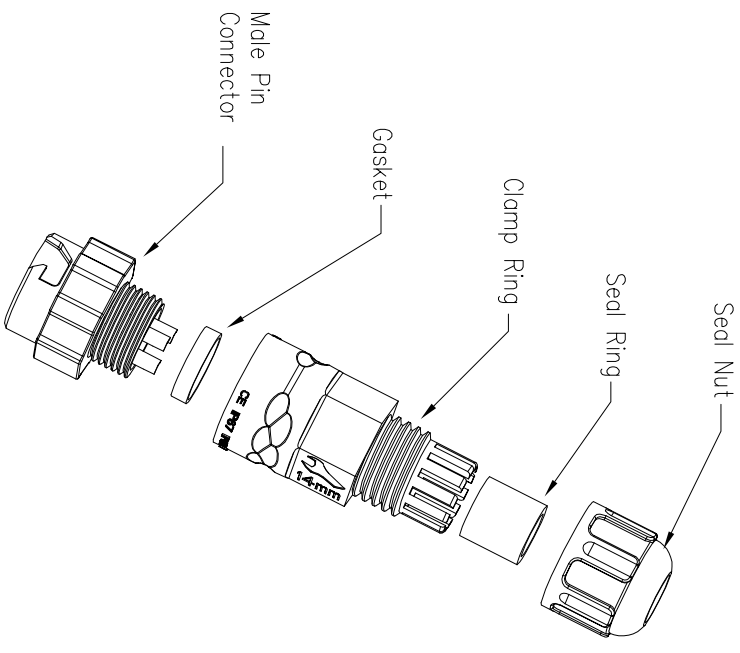
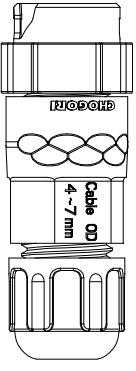



REV.	EN. NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Liu	2019/08/13

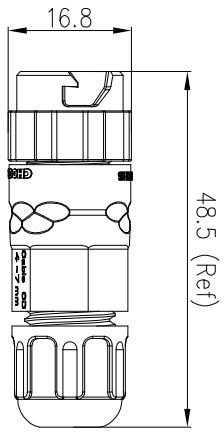


22XXX331-01

Pin Number

P/N: 22004331-01

Pin Assignments
Front View



UNIT: mm

TOLERANCE
X
XX
XXX
ANGLES

± 0.25
 ± 0.15
 ± 0.05
 $\pm 1^\circ$

DESCRIPTION

Standard Series Push Lock
Female Plug With Male Pin

SCALE: 1:1

REV: C1

SIZE: A4

SHEET: 1 OF 1

* : Inspection Item

CHOGORI

PART NO
22XXX331-01

DWG NO
CUSTOMER

DRAWN BY
Liu

CHECKED BY
Mo

DATE
2019/08/13

APPROVED BY
Pamson

DATE
2019/08/13

DATE
2019/08/13

- Specification:
- 1.Operation Temperature: $-45^\circ\text{C}\sim 105^\circ\text{C}$.
 - 2.Insulation Resistance: $100\text{M}\Omega$ at DC500V.
 - 3.Contact Resistance: $<10\text{m}\Omega$
 - 4.Withstand Voltage: 1500V AC
 - 5.Operating Current: 10A
 - 6.Operating Voltage: AC 125V
 7. Waterproof Rate: IP67 (Mated)
 8. Seal Nut: Nylon, Black
 9. Seal Ring: Silicon, Black
 10. Clamp Ring: Nylon, Black
 11. Gasket: Silicon, Red
 12. Male Pin: Copper Alloy, Gold Plated
 13. Connector: Nylon+GF, Black
 14. RoHS Compliant.
 15. UL Compliant.
 16. Cable Range OD: $\phi 3.5\text{mm}\sim\phi 6.8\text{mm}$
 17. Mating Cap: 806-00062-00